



ANN DEMEULEMEESTER – SERAX

"LUCE"


INSTRUCTION MANUAL


B0821100

Luminare specs 2200-2700 K

Type: Table Lamp

Switch: Yes

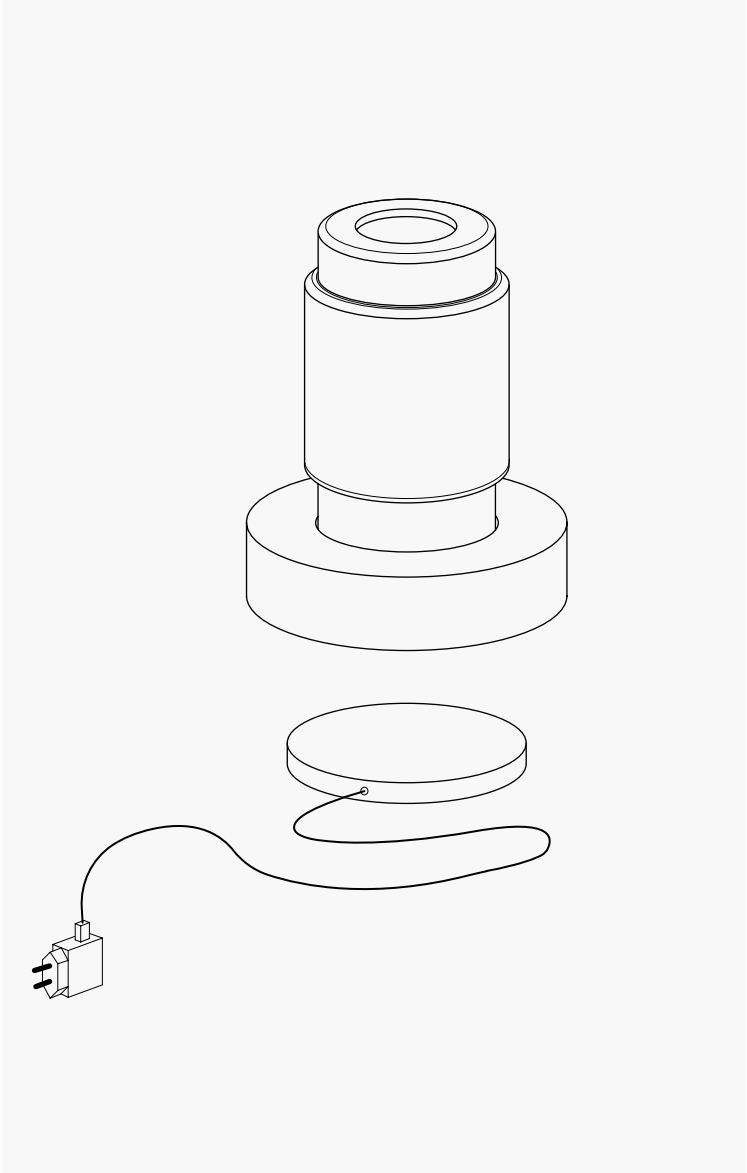

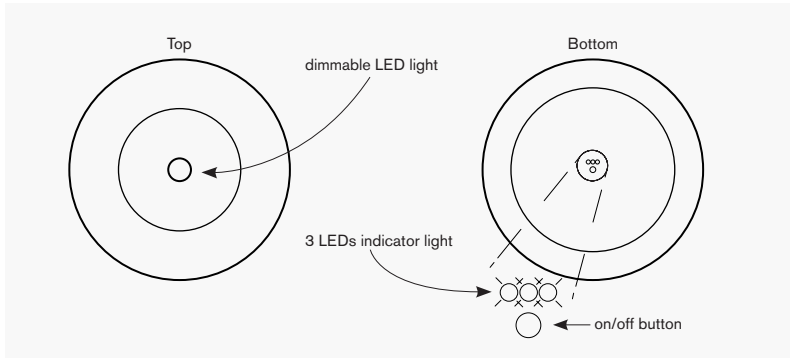

Charging the battery

Before you can use the lamp, the battery must be fully charged.

- Connect the power adaptor to a wall socket.
- Put the wooden top part on the charging station. When positioned correctly in the center the lamp will blink 2 times and the charging will start automatically.
- Any time you remove the lamp from the charging station, it will blink 2 times to indicate that it has stopped charging.
- Battery charge level is indicated by 3 LEDs at the bottom.
- When the battery is low the lamp will switch off automatically. If switched on without recharging it will light up for 10s and then go off again. During this period one LED indicator will flash at a fast rate to show that the battery needs to be charged.
- The LED lamp can stay on during recharge.

Operating the lamp

- The lamp can be switched on/off and dimmed with the push button located in the middle of the bottom of the wooden lamp base.
- The lamp has a programmed memory. When switched on the lamp will emit previous light output.
- Push and hold the button for dimming and light colour change.

Troubleshooting

Light is not coming on

- Push the button to view the battery level indicated by the 3 LEDs on the bottom of the wooden base. If the battery level is too low, please put the lamp on the plugged in charging station and charge it for at least 8 hours.
- Is the lamp charging when it is put on the charging station? When you put the lamp on the charging station, it should blink 2 times. If this is not happening, the lamp is not charging or the light source is broken. Please check if the adapter is well inserted in the wall socket and make sure that the wall socket has 230V electrical power.

Technical specifications

- Battery: 3.7V, 2000mAh, Lithium/Ion rechargeable battery, minimum 500 full charging cycles.
- Maximum power 0.9W
- Operating time from a full charge until complete discharge: 8h at maximum power.
- Charging time: 8h for a full charge.
- IP20
- Light source: Dim to warm, 2200-2700K, CRI>90
- Charger: Input 100-240V/50-60Hz, Output: 5V/1A
- Discharge time in standby-mode is about 5 months.

Safety requirements


Although it is a battery operated lamp, in order to avoid any safety issues, please review the following recommendations:

- If the lamp is broken or damaged, please stop using and replace it.
- Make sure that the charger is plugged into a network with the following specifications: (230V, 50Hz AC).
- If the power adapter is damaged (cracked, broken, burnt, etc.), please stop using it and replace it with a new one.
- If you notice that the cable going to the charging station is damaged, please stop using it to avoid possible fire hazards.

Safety directions

Please study the instruction manual and the information below carefully before installing or using this product.

Please keep this user manual for further reference.

1. The luminaires may only be installed by authorised and qualified technicians according to the valid regulations for electrical installation.
2. Maintenance of the luminaires is limited to their surfaces. During maintenance, no moisture can come into contact with any areas of the terminal connections or voltage control parts.
3. The electrical supply must be switched off at the source, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
4. Take care of the minimal separation distance from other objects and the room required around the fitting.
5. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
6. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
7. When replacing a halogen lamp, wait for it to cool for a minimum of 5 minutes.
8. Clean with a clean, dry cloth or brush. Do not use solvents or abrasives.
Avoid damp on all electrical components.
9. Take all available technical information into account.
10. Take note of the symbols when connecting the wires:
N = Neutral
L = Live
 = Earth
11. If the external flexible cable or cord of this luminaire is damaged, it must be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

12. Meaning of symbols:



For indoor use only, where direct contact with water is impossible



Protection class 1: the fitting must be earthed



Protection class 2: the fitting is double insulated and does not require earthing



Protection class 3: the fitting is low voltage



Observe the minimum distance indicated between the lamp and the illuminated materials/objects



Only self-screening halogen bulbs should be used with the luminaire



Strip the wire to the indicated length



Connect using the specified cable



The fixture can be used in combination with a dimmer. Consult the sales outlet for the correct type of dimmer (important in the case of 12V fittings)



The maximum wattage indicated in each lighting unit must not be exceeded



This luminaire cannot be disposed together with normal domestic waste in a standard rubbish bin. Instead, you have to bring it to a recycling station for electrical waste



This luminaire was designed to work only with the indicated voltage



www.serax.com

Veldkant 21 Kontich, Belgium - Tel. +32 3 458 05 82



