



KIOSK wall

INSTALLATION INSTRUCTIONS | OCTOBER 2024

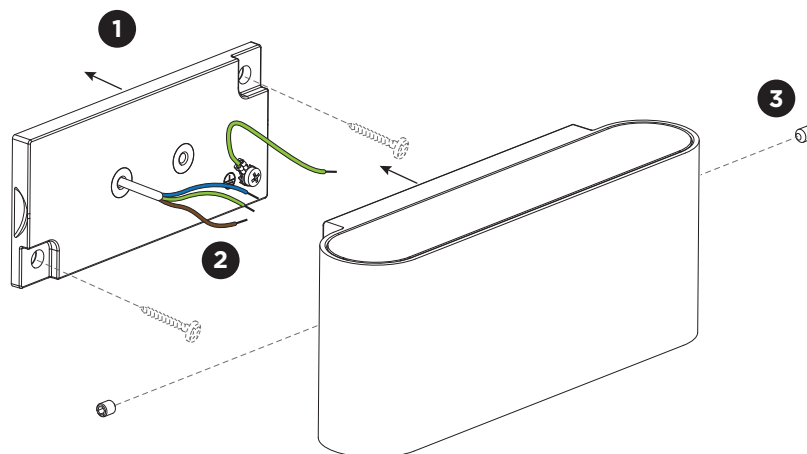

DIMENSIONS

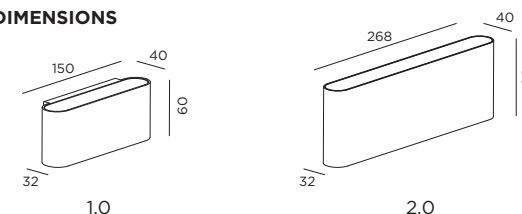


MOUNTING INSTRUCTION

- 1 Remove the mounting base by loosening the socket screws and fix it to the wall with screws (screws are not included).


2 POWER CONNECTION

Connect to 220-240V.

Connect the earth cable.





For LED: always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.
for example:

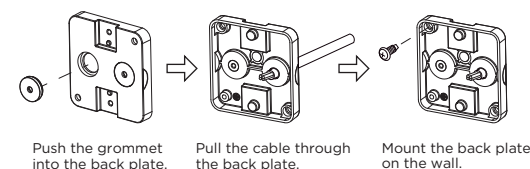

- 3 Fix the fixture to the mounting base with the socket screws.

Mounting base:

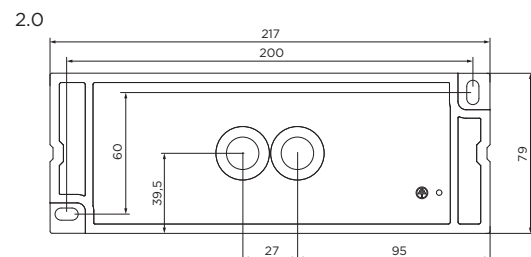

Always use a matching grommet in the overview table.

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²





WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com

KIOSK wall


INSTALLATION INSTRUCTIONS | OCTOBER 2024

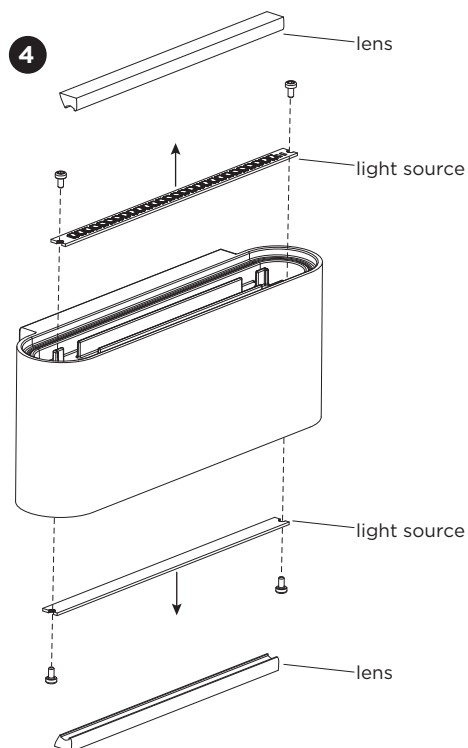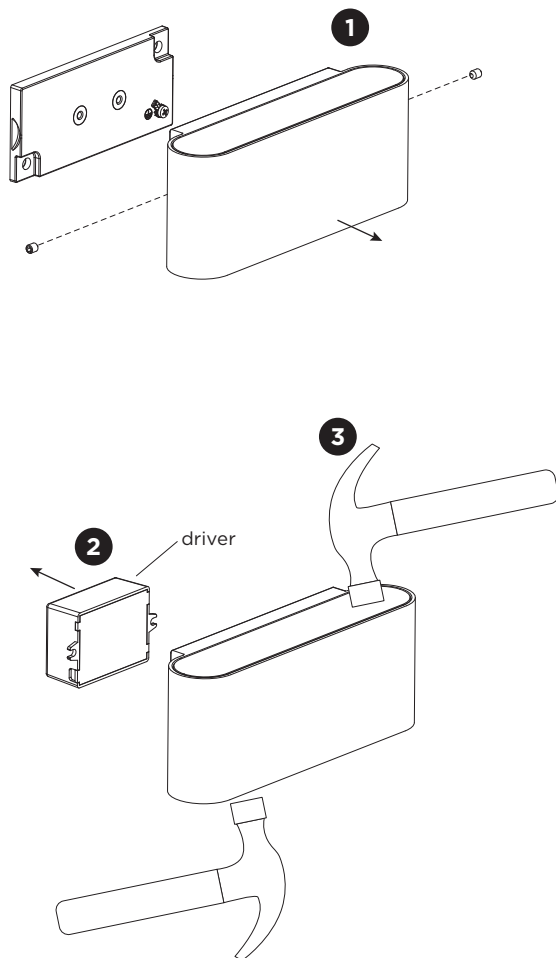

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Dismount the fixture from the wall by loosening the socket screws and the wiring.
- 2 Remove the driver by pulling and disconnect the wires.
- 3 Break the glass(es).
- 4 Take out the lens(es) and unscrew the light source(s) to remove it/them.



The light source is not replaceable.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class E.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com