


DIMENSIONS

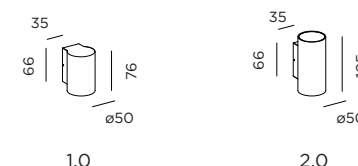


MOUNTING INSTRUCTION


- 1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the wall with screws (screws and plugs (if necessary) are included).

- 2 POWER CONNECTION


Connect to 220-240V.

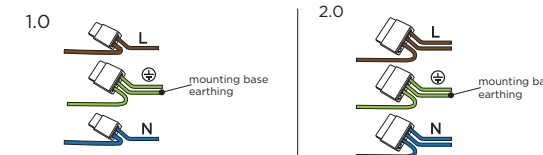


Connect the earth cable.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.
for example:

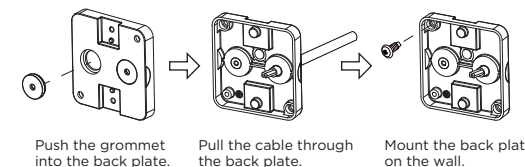

- 3 Fix the luminaire on the base with the socket screws.


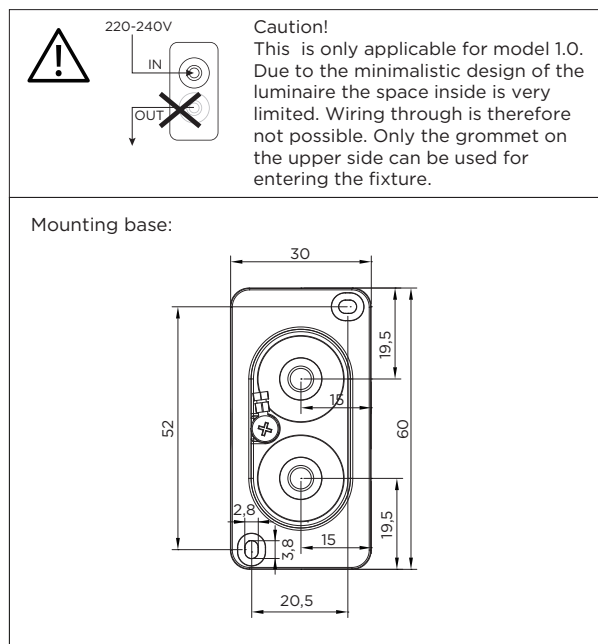


grommets:

	A	B	C
use pin to make hole, not a knife			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²

TRAM


INSTALLATION INSTRUCTIONS | JANUARY 2023

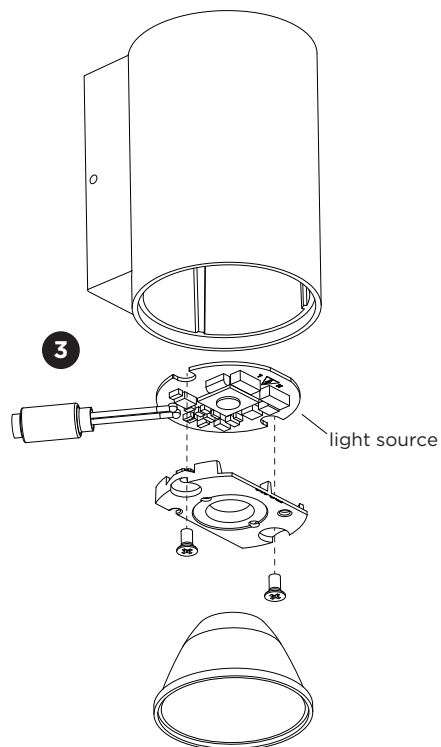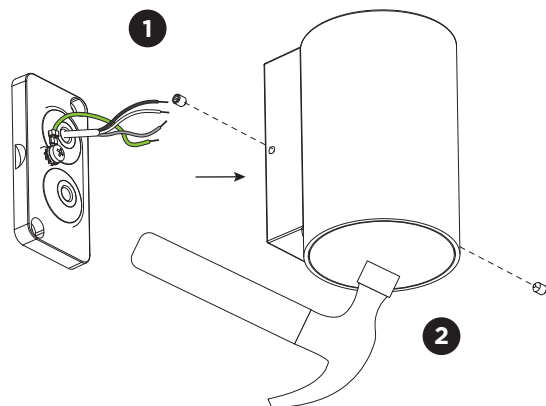

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1 Loosen the socket screws, disconnect the wires and remove the fixture from the mounting base.
- 2 Break the glass.
- 3 Take out the reflector and unscrew the holder to remove the light source.



The light source is not replaceable.



This luminaire contains a light source with the energy class F.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com