

# Arco

suspension light




## Table of contents

|                                               |        |
|-----------------------------------------------|--------|
| 1. Product overview                           | Page 2 |
| 2. Finishes and materials                     | Page 2 |
| 3. Light Source & dimming                     | Page 2 |
| 4. Functionality & Accessories                | Page 3 |
| 5. Photometric data and technical information | Page 3 |
| 6. Installation                               | Page 3 |
| 7. Ordering codes                             | Page 4 |
| 8. Certifications & standards                 | Page 6 |
| 9. Maintenance & Cleaning                     | Page 6 |

## Versions



ARC\_4002X  
Page 4



ARC\_4002X2  
Page 4



ARC\_4002X3  
Page 5

---

# Arco

suspension light

---

## 1. Product overview

Ceiling light providing soft, diffused illumination through a satin-finished translucent flexible silicone tube, offering general ambient lighting. Suitable for creating compositions with up to three units using a single remote driver.

Remote driver must be placed in an IP/65 box or in a dry location, maximum 15m from the lamp. Optional surface canopy with IP/65 junction box to fit the driver can be purchased.

Double layer coating for high resistance.



---

## 2. Finishes and Materials



**Tube:** Silicone  
**Metal:** 96 Anthracite

---

## 3. Light Source & Dimming

### Lamping per head:

LED 12W (2700K / Ang. 120° / >90 CRI / 24V)

230V / Typ 1092 lumens

\*Integrated LED module (included).

Remote driver required

### Dimming options:

Standard: TRIAC


Optional: DALI

# Arco


suspension light

## 4. Functionality & Accessories

**Accessory:** surface canopy with IP/65 j-box to fit the driver.  
Code: 114002960

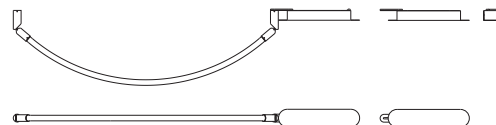


**Possible shapes:** 3 recommended installations for optimal design (1150 mm, 950mm, 750mm):

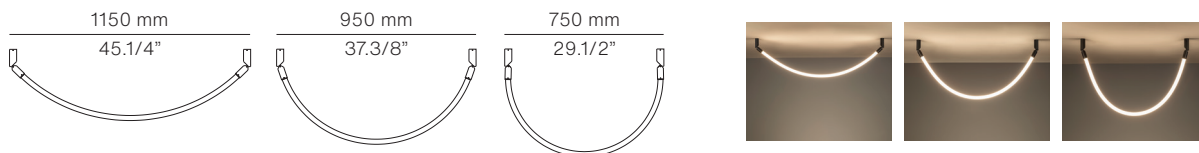

**Possible compositions:**


possibility to creating compositions up to three units with a single driver.



## 5. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.  
Access to photometric files in download area.


2D / 3D / BIM Files available.  
Access to files in download area here



## 6. Installation


### Remote driver

It must be placed in an IP/65 box or in a dry location, maximum 15m from the lamp.



### Optional Surface Canopy

Accessory: surface canopy with IP/65 j-box to fit the driver.

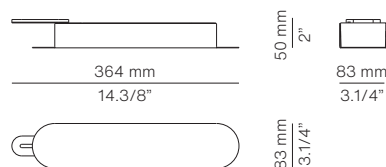

**Code:** 114002960

# Arco

suspension light

## 7. Ordering Codes

### Lamping 4002X

LED 12W (2700K / Ang. 120° / >90 CRI / 24V)  
230V / Typ 1092 lumens  
\*Integrated LED module (included).  
Remote driver required

### Finishes:


Tube: Silicone  
Metal: 96 Anthracite



**DIM:** TRIAC (Optional: DALI)

### Drawing

ARC\_4002X  
IP65

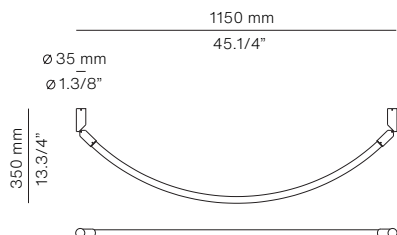

### Finish

Anthracite

### Ordering Code

ARC\_4002X\_96W

### Lamping 4002X2

LED 2x12W (2700K / Ang. 120° / >90 CRI / 24V)  
230V / Typ 2x1092 lumens  
\*Integrated LED module (included).  
Remote driver required

### Finishes:


Tube: Silicone  
Metal: 96 Anthracite



**DIM:** TRIAC (Optional: DALI)

### Drawing

ARC\_4002X2  
IP65

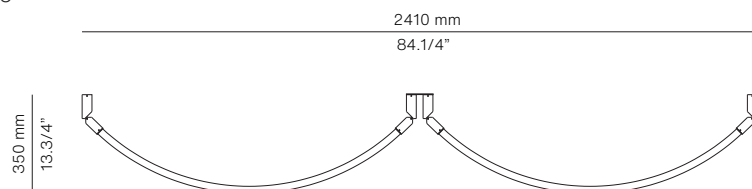

### Finish

Anthracite

### Ordering Code

ARC\_4002X2\_96W

# Arco

suspension light

## 7. Ordering Codes

### Lamping 4002X3

LED 3x12W (2700K / Ang. 120° / >90 CRI / 24V)

230V / Typ 3x1092 lumens

\*Integrated LED module (included).

Remote driver required

### Finishes:

Tube: Silicone


Metal: 96 Anthracite

**DIM:** TRIAC (Optional: DALI)

## Drawing

ARC\_4002X3

IP65

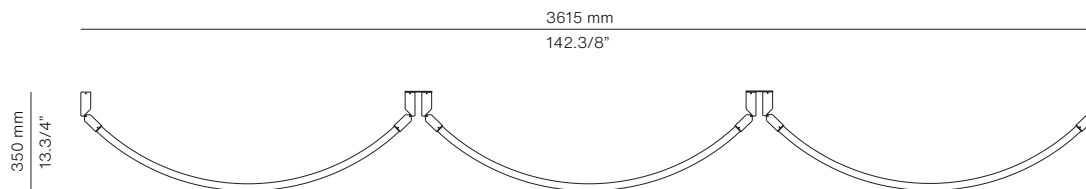

### Finish

Anthracite

### Ordering Code

ARC\_4002X3\_96W

## 8. Certifications & Standards



Warranty: 2 years  
100% made in Spain

---

## 9. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.