



## Ilargi Ø230

Iratzoki-Lizaso

Pendant Ilargi Ø230 LED 11.8 LED warm-white 2700K PHASE CUT Madera Oscura 641lm

### Technical features

- Luminaire total power: 11.8W
- Real lumens: 641
- Real lm/W: 54
- Correlated Colour Temperature (CCT): LED warm-white 2700K
- UGR:  $\leq 16$
- Structure material: Wood, Steel
- Structure finish: Madera Oscura
- Diffuser material: Glass
- Diffuser finish: Opal
- Driver Brand: HEP
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: PHASE CUT
- Power Factor: 0.90
- THD%: 20
- Useful life: 50,000h L80B20
- Warranty: 5 years
- Easily recyclable luminaire



### Luminotechnic features

- Luminance C0°G65°: 1013
- Luminance C90°G65°: 1013
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG2

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	8.5W	LED warm-white 2700K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	15.8				
UGR lengthwise	15.8				

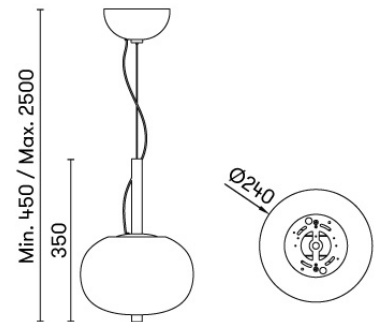


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Ilargi Ø230

Iratzoki-Lizaso

Pendant Ilargi Ø230 LED 11.8 LED warm-white 2700K PHASE CUT Madera Oscura 641lm

### Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.