


GEJST

LIRIS **Wall lamp**

by Kasper Friis Egelund & Thalea Schmalenberg

Instruction

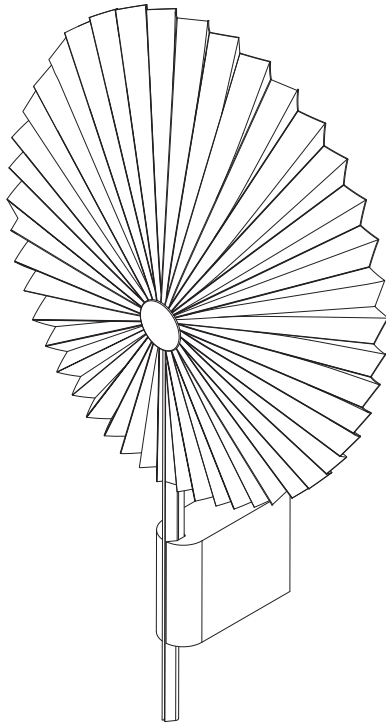


CARE & MAINTENANCE

Read before installation


- IMPORTANT - Before installation you must disconnect the main cable from the power supply - remove fuse or turn switch to "OFF".
- Before drilling holes, check the walls for any cables to prevent damage.
- The installation must be performed in accordance with the local safety regulations.
- Before usage, refer to the provided manual. The manual contain the needed instructions to assemble the lamp. An incorrect assembly can result in damaging the parts, the circuit and reducing the lamp's lifespan.
- Do not place any object on the lamp if they are not delivered with the lamp.
- Ensure that the power supply is OFF before cleaning the product. Use a dust broom to clean the lamp.
- Use the following white cotton gloves to avoid greasy fingerprints at the lamp.
- The lamp gets hot when it is on. Allow the lamp to cool down before touching or cleaning.
- This information is a general guideline. Please contact us for specific maintenance instructions.
- If a part is damaged, it shall be replaced by the manufacturer or his service agent or a qualified person.

Content of the box

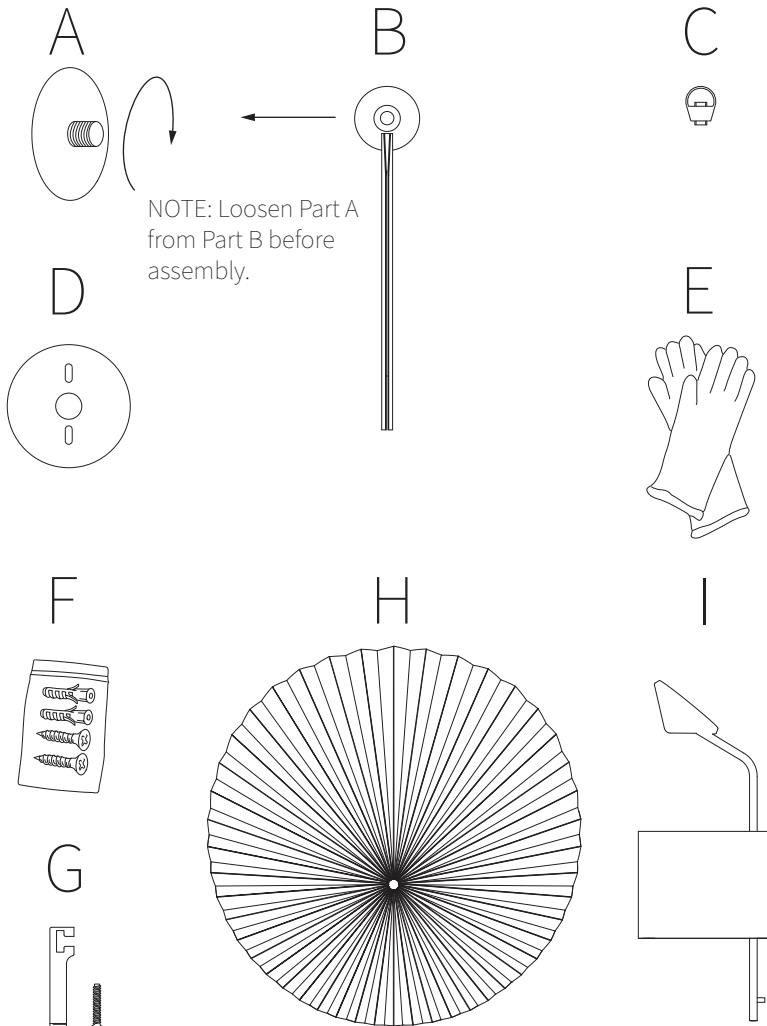

GEJST

Please go to our website to view a detailed video guide
on how to assemble the lamp.

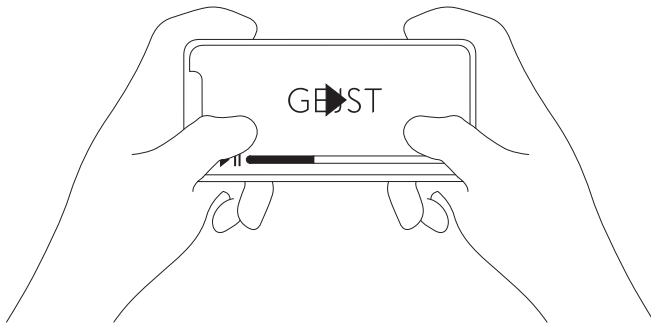


www.gejst.com/pages/video


NOTE: USE THE WHITE GLOVES

GEJST

- ① Grab the fan holder (Part B) with one hand and the lampshade (Part H) with your other hand. Slide the fan holder (Part B) onto the stitching on the smooth side of the lampshade (Part H).

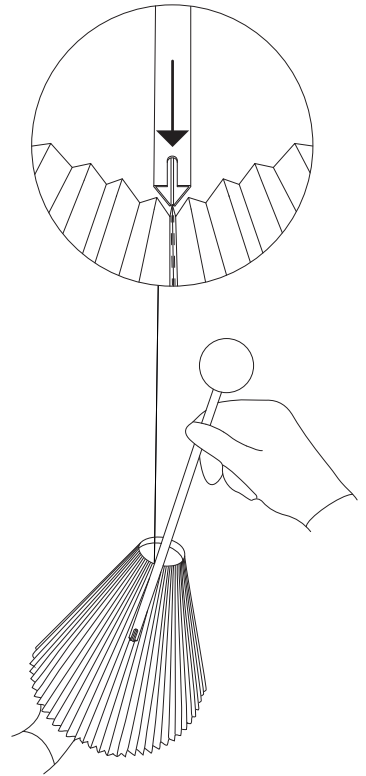


- ② Slide the fan holder (Part B) all the way down on the stitching track.

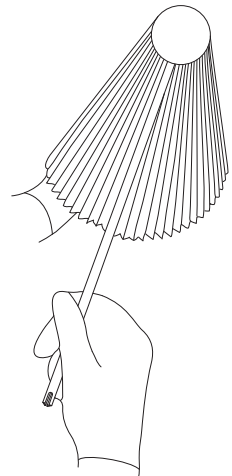



GEJST

- ③ Place the fan holder (Part B) with the attached lampshade (Part H) on a table, with the flat side of the fan holder facing downwards.

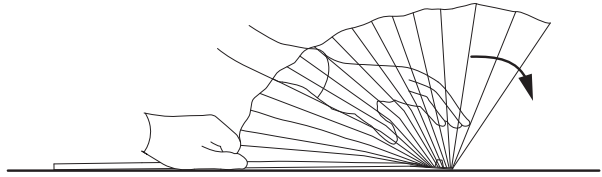

NOTE: Cover the table with a soft blanket to prevent the parts from getting scratched.

- ④ Hold the fan holder (Part B) and lampshade (Part H) with your one hand. Press the lampshade flat on the table with your other hand.

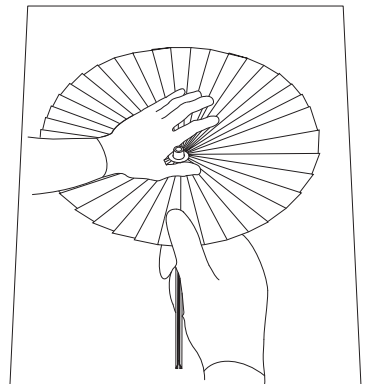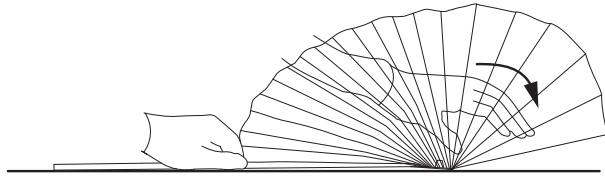


GEJST

- ⑤ Screw the top cover (Part A) onto the fan holder (Part B) by following the next step.



- ⑥ Grab the fan holder (Part B) with your one hand and use your fingertips from the other hand to fasten the top cover firmly (Part A).

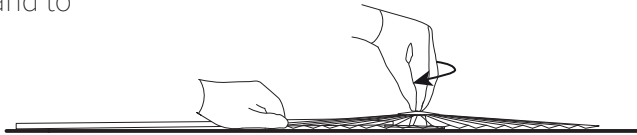

NOTE: Take care not to force the tightening operation


- ⑦ Decide the mounting setup and follow the steps.

A: Hardwired without wall cover, go to step 8

B: Hardwired with wall cover, go to step 14

C: Wired without wall cover, go to step 20

D: Wired with wall cover, go to step 26

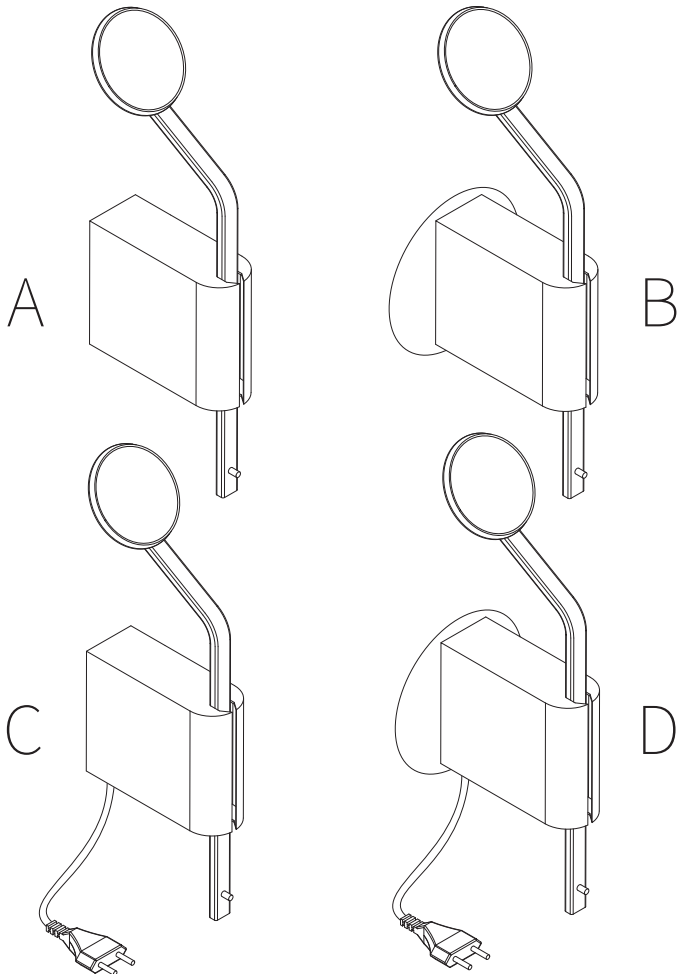


GEJST


Hardwired without wall cover

- ⑧ Mount the bracket (Part G) on the wall with screws and plugs (Part F).


Make sure to use suitable screws and plugs that fits the type of wall.

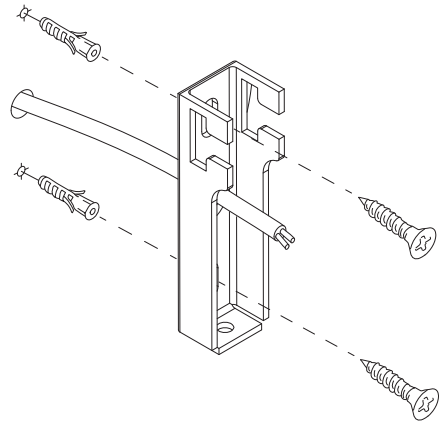

- ⑨ Connect the wire ends from the power cable to the cable connector inside the LED driver. Match the brown wire with “L” and the blue wire with “N”.

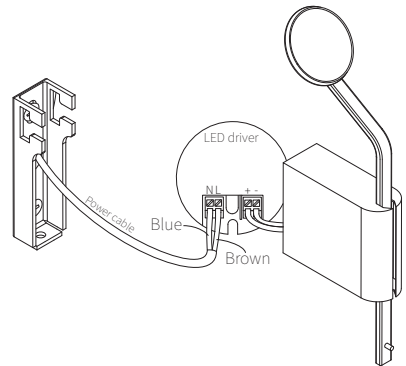


- ⑩ Place the lamp on the bracket (Part G) and push upwards to attach the house.

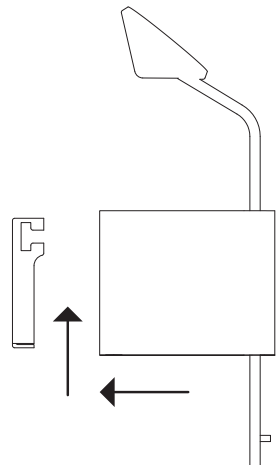

GEJST

- ⑪ Secure the attachment by fasten the screw at the bottom of the house (Part I) with the bracket (Part G).

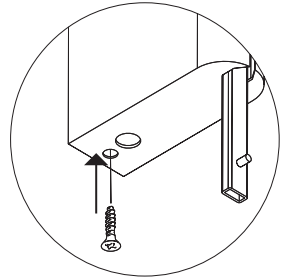


- ⑫ Place the assembled fan parts in the base (Part I), by sliding the fan holder (Part B) into the groove.



- ⑬ Touch the button for usage.


Note: Integrated 3-step dimmer

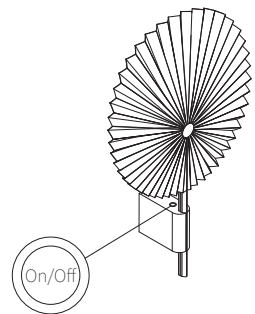


Hardwired with wall cover

- ⑭ Mount the bracket (Part G) and the cover plate (Part D) on the wall with screws and plugs (Part F).


Make sure to use suitable screws and plugs that fits the type of wall.

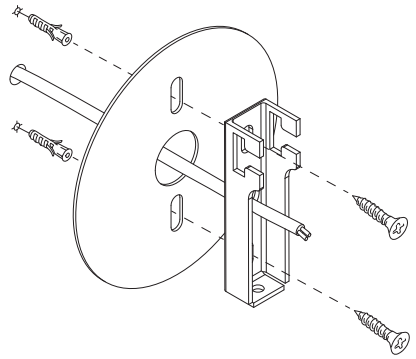

- ⑮ Connect the wire ends from the power cable to the cable connector inside the LED driver. Match the brown wire with “L” and the blue wire with “N”.

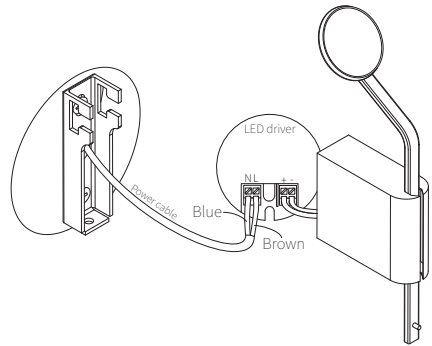


- ⑯ Place the lamp on the bracket (Part G) and push upwards to attach the house.

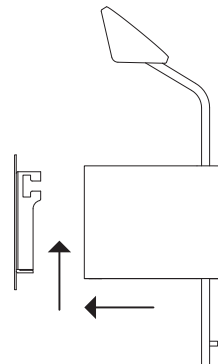

GEJST

- ⑪ Secure the attachment by fasten the screw at the bottom of the house (Part I) with the bracket (Part G).




- ⑫ Place the assembled fan parts in the base (Part I), by sliding the fan holder (Part B) into the groove.



- ⑬ Touch the button for usage.

Note: Integrated 3-step dimmer




GEJST


Wired without wall cover

- ②① Mount the bracket (Part G) on the wall with screws and plugs (Part F).


Make sure to use suitable screws and plugs that fits the type of wall.

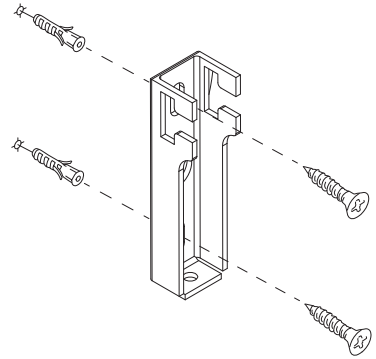

- ②② Secure the cable by tightening the screw in the cable relief (Part C).

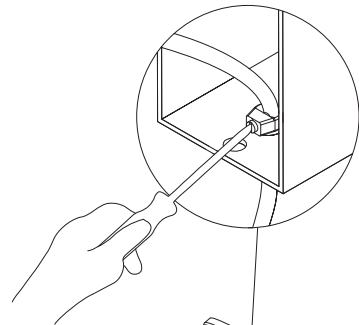


- ②③ Connect the wire ends from the power cable to the cable connector inside the LED driver. Match the brown wire with “L” and the blue wire with “N”.

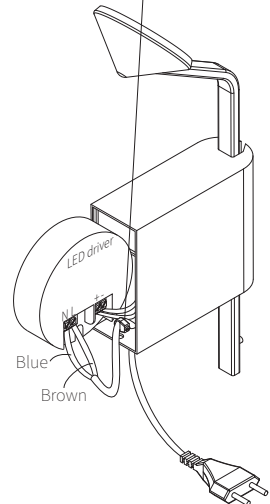


GEJST

- ②③ Place the lamp on the bracket (Part G) and push upwards to attach the house.

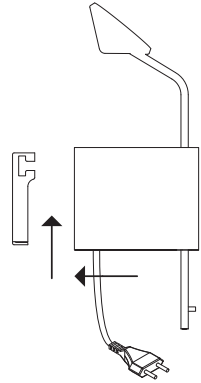


- ②④ Secure the attachment by fastening the screw at the bottom of the house (Part I) with the bracket (Part G).

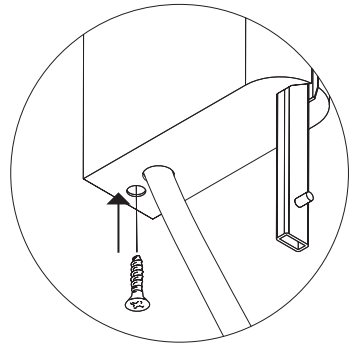

- ②⑤ Place the assembled fan parts in the base (Part I), by sliding the fan holder (Part B) into the groove.

Touch the button for usage.


Note: Integrated 3-step dimmer

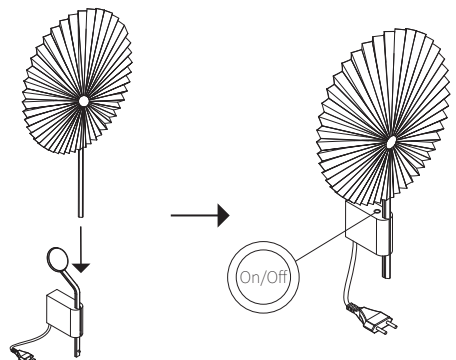


Wired with wall cover

- ②⑥ Mount the bracket (Part G) and the cover plate (Part D) on the wall with screws and plugs (Part F).


Make sure to use suitable screws and plugs that fits the type of wall.



- ②⑦ Secure the cable by tightening the screw in the cable relief (Part C).

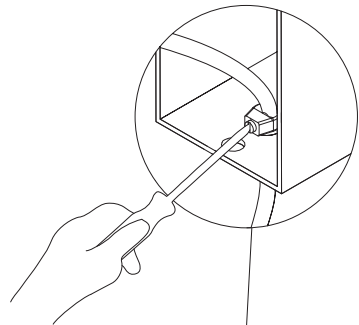


- ②⑧ Connect the wire ends from the power cable to the cable connector inside the LED driver. Match the brown wire with “L” and the blue wire with “N”.

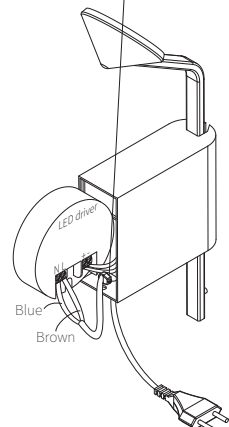


GEJST

- ②⑨ Place the lamp on the bracket (Part G) and push upwards to attach the house.

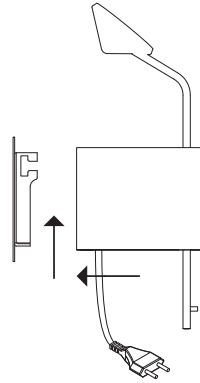

- ③⑩ Secure the attachment by fastening the screw at the bottom of the house (Part I) with the bracket (Part G).



- ③⑪ Place the assembled fan parts in the base (Part I), by sliding the fan holder (Part B) into the groove.

Touch the button for usage.

Note: Integrated 3-step dimmer

