Cube Out

MODELS COVERED

MODEL	REFERENCE	SIZE	IP
Cube Out	NT-CO-BR	102 × 102 × 57 mm	IP65

TECHNICAL DATA

LOCATION	Outdoor / indoor · wall mounted
SIZE	102 × 102 × 57 mm
WEIGHT	400 g
LIGHT SOURCE	G9 LED lamp*
SUPPLY	230 V mains
PROTECTION	IP65
TOOLS	Allen wrench No. 3, drill

* Lamp not included.

BEFORE YOU START

- Installation must be carried out by a qualified electrician.
- The fixture must be earthed wherever an earth connection point exists.
- Make sure the mains is switched off before any work or servicing.
- After installation, check that the fixture is firmly fixed and that the cable clamps, if any, are well tightened.
- The fixture is not designed for loop-through wiring.
- Never fit a lamp above the wattage shown on the label or the packaging.

NOT INCLUDED

- G9 LED lamp
- Wall plugs and terminals

Novatrade Lighting accepts no liability for injury or damage resulting from incorrect installation or use.

Caution · Wear anti-static gloves before you touch the LED.


Caution · Replace any cracked shield immediately.

CARE


- The brass is left untreated. It darkens and develops a natural patina outdoors, which protects it; this is not a defect.
- Clean with a soft cloth, dry or slightly damp. Never use abrasives, solvents, metal polish on the lens, or a high-pressure jet.

At the end of its life, do not throw the fixture away with household waste. Take it to a collection point for electrical and electronic equipment (WEEE). Brass is fully recyclable.


Installation

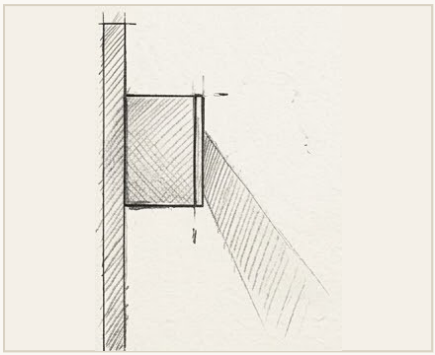


Cube Out on the wall

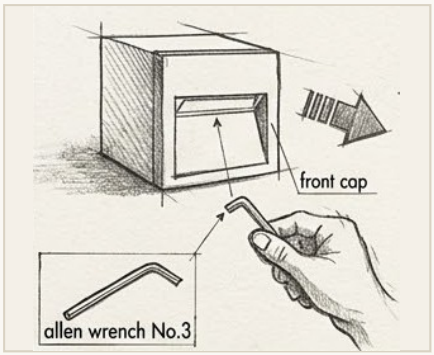


1 · Remove the front cap

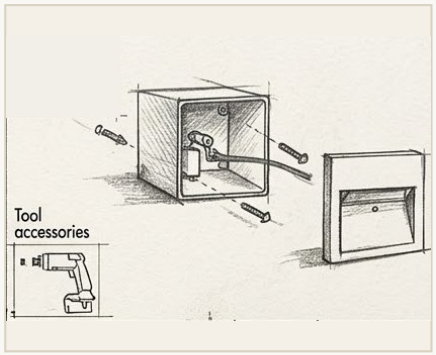


2 · Screw the box to the wall

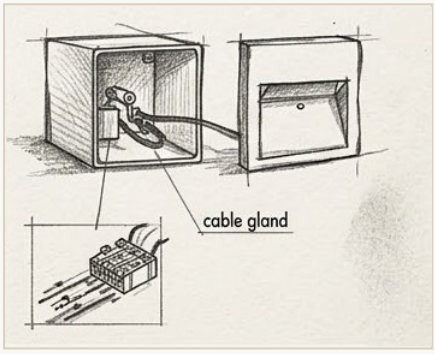

3 · Cable gland and connections

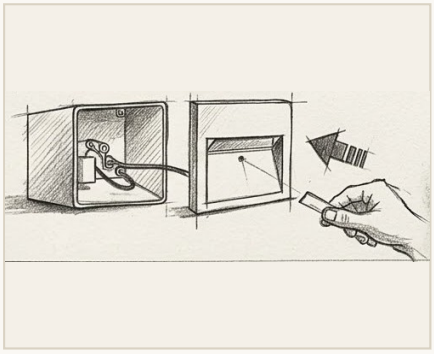

4 · Close the cap

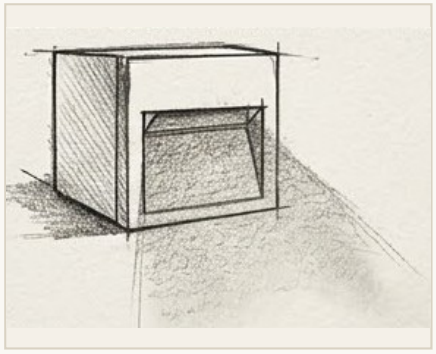

5 · Switch on

1 REMOVE THE FRONT CAP

Switch off the mains supply. Release the screw with the Allen wrench No. 3 and remove the front cap.

2 FIX TO THE WALL

Screw the luminaire box to the wall with screws and wall plugs.

3 CONNECT

Pass the supply cable through the cable gland and connect it to the terminal block: L brown, N blue, earth green / yellow. Fit the G9 LED lamp.

4 CLOSE THE CAP


Refit the front cap and tighten the screw with the Allen wrench.

5 SWITCH ON

Switch the mains supply back on.

WIRING · 230 V MAINS

- Connect the supply to the terminal block: L (line, brown), N (neutral, blue) and earth (green / yellow).
- Use an outdoor-rated cable and pass it through the rubber inlet or gland so that it seals around the sheath.
- Fit the lamp type shown in the table. Lamps are not included.

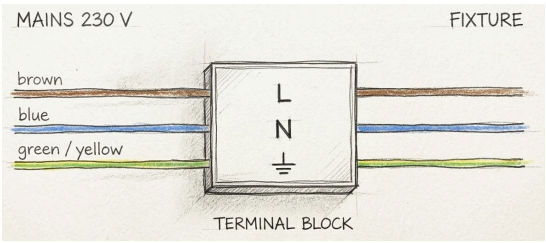

QUESTIONS ABOUT YOUR INSTALLATION
Novatrade Srl · Chaussée de Louvain 239 · B-1410 Waterloo · info@novatrade.be · www.novatradelighting.com