Wall Washer

MODELS COVERED

MODEL	REFERENCE	SIZE	IP
Wall Washer	NT-WW-BR	338 × 70 × 92 mm	IP65

TECHNICAL DATA

LOCATION	Outdoor · ground, wall or ceiling
SIZE	338 × 70 × 92 mm
WEIGHT	1500 g
LIGHT SOURCE	LED, CRI 80 · 5 W (750 lm) or 7.3 W (1050 lm) · 2700 K
OPTICS	Lens 25°, 40° or oval 30 × 65°, or reflector 10° or 20°
SUPPLY	230 V · 350 / 500 mA driver included
BRACKET	U bracket 183.5 × 22 mm · holes Ø 6, Ø 10.5 and Ø 6 mm
PROTECTION	IP65
TOOLS	Tape measure, drill

BEFORE YOU START

- Installation must be carried out by a qualified electrician.
- The fixture must be earthed wherever an earth connection point exists.
- Make sure the mains is switched off before any work or servicing.
- After installation, check that the fixture is firmly fixed and that the cable clamps, if any, are well tightened.
- The fixture is not designed for loop-through wiring.
- LED modules are replaced by the manufacturer only.

SUPPLIED

- U bracket
- Driver

NOT INCLUDED

- Waterproof connector (IP65 minimum)
- Wall plugs, screws and terminals

Novatrade Lighting accepts no liability for injury or damage resulting from incorrect installation or use.

Caution · Wear anti-static gloves before you touch the LED.


Caution · Replace any cracked shield immediately.

CARE


- The brass is left untreated. It darkens and develops a natural patina outdoors, which protects it; this is not a defect.
- Clean with a soft cloth, dry or slightly damp. Never use abrasives, solvents, metal polish on the lens, or a high-pressure jet.

At the end of its life, do not throw the fixture away with household waste. Take it to a collection point for electrical and electronic equipment (WEEE). Brass is fully recyclable.


Installation

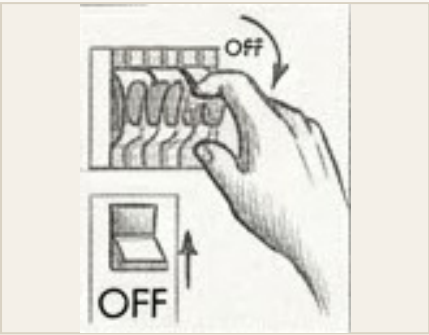


1 · Switch off

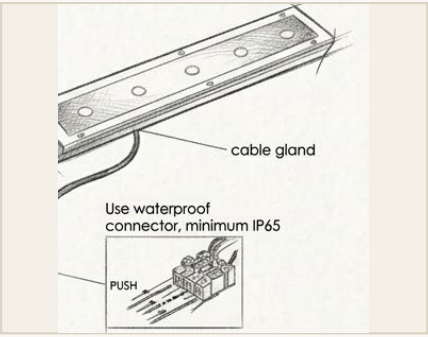


A · Waterproof connection at the cable gland, connector IP65 minimum

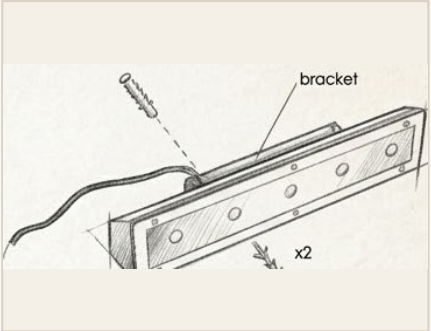


2 · Screw the U bracket to the wall, ground or ceiling

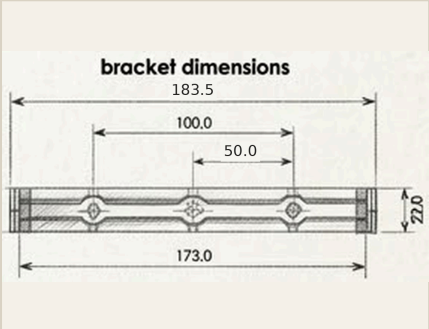

Bracket dimensions in mm

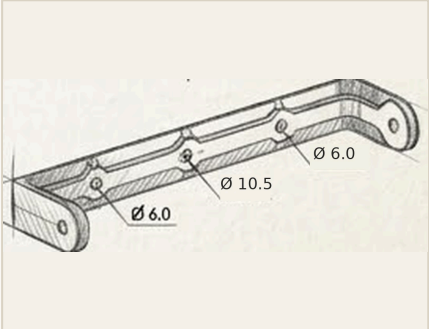

U bracket · holes Ø 6, Ø 10.5 and Ø 6 mm

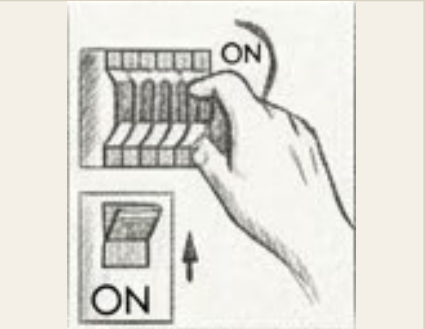

3 · Switch on

1 SWITCH OFF

Switch off the mains supply before you start.

2 FIX THE BRACKET

Screw the U bracket to the wall, the ground or the ceiling with two screws and wall plugs (see the bracket dimensions).

3 SWITCH ON

Switch the mains supply back on.

A CONNECT

Make a waterproof connection between the supply cable and the luminaire lead, after the cable gland. Use a waterproof connector rated IP65 or better.

B FIT AND AIM

Fit the luminaire in the bracket and tilt it towards the trunk, the crown or the wall to be lit.

QUESTIONS ABOUT YOUR INSTALLATION

Novatrade Srl · Chaussée de Louvain 239 · B-1410 Waterloo · info@novatrade.be · www.novatradelighting.com