



Ilargi Doble Lamp

Iratzoki-Lizaso

Pendant Ilargi Doble Lamp LED 40.6 LED warm-white 2700K PHASE CUT Madera Oscura 1833lm

Technical features

- Luminaire total power: 40.6W
- Real lumens: 1833
- Real lm/W: 45
- Correlated Colour Temperature (CCT): LED warm-white 2700K
- UGR: ≤ 16
- Structure material: Wood, Steel
- Structure finish: Madera Oscura
- Diffuser material: Glass
- Diffuser finish: Opal
- Driver Brand: HEP
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: PHASE CUT
- Power Factor: 0.90
- THD%: 20
- Useful life: 50,000h L80B20
- Warranty: 5 years
- Easily recyclable luminaire



Luminotechnic features

- Luminance C0°G65°: 738
- Luminance C90°G65°: 738
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG2

| UGR | | Lampholder | Quantity | Light source power (W) | Correlated Colour Temperature (CCT) |
|------------------|------------|------------|----------|------------------------|-------------------------------------|
| S=0.250 | | | | | |
| Ceiling / cavity | 0.7 | LED | 1 | 36.1W | LED warm-white 2700K |
| Walls | 0.5 | | | | |
| Working Plane | 0.2 | | | | |
| Room dimensions | X=4H, Y=8H | | | | |
| UGR crosswise | 14.6 | | | | |
| UGR lengthwise | 14.6 | | | | |

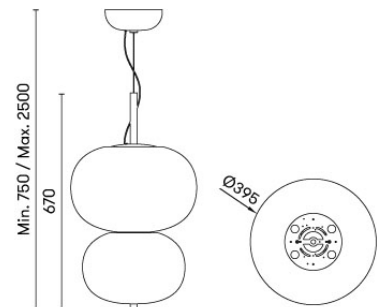


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Ilargi Doble Lamp

Iratzoki-Lizaso

Pendant Ilargi Doble Lamp LED 40.6 LED warm-white 2700K PHASE CUT Madera Oscura 1833lm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.