



FLYRA HORIZONTAL

INSTALLATION INSTRUCTIONS | APRIL 2026

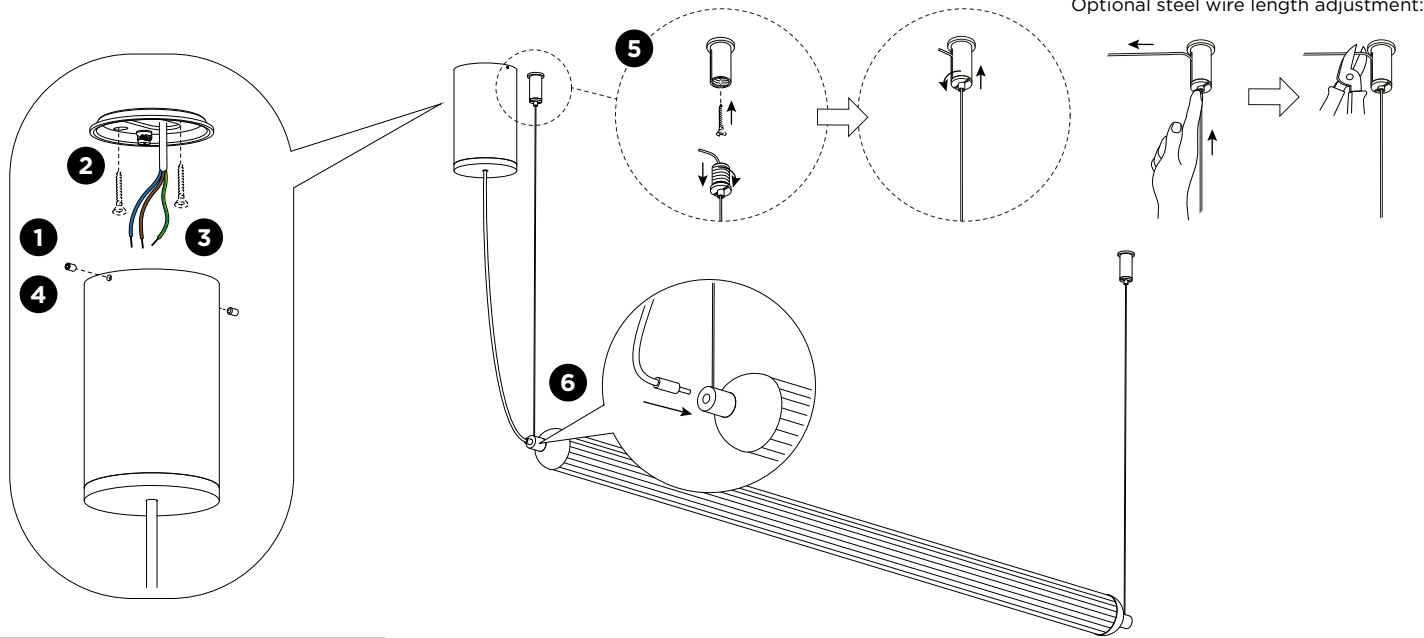


DIMENSIONS SINGLE

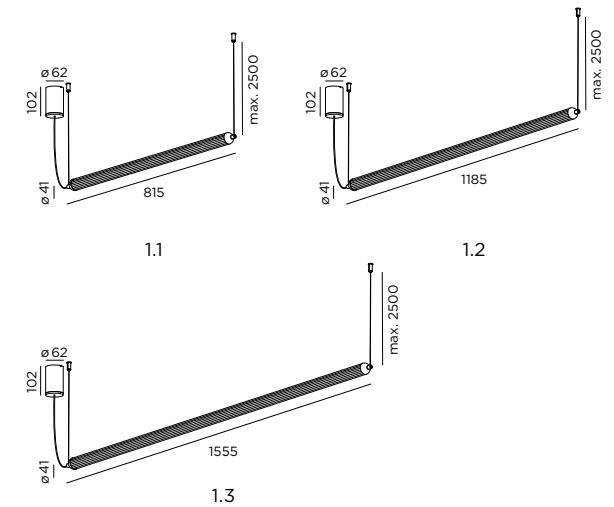

MOUNTING INSTRUCTION


- 1 Loosen the socket screws to remove the mounting base.
- 2 Mount the mounting base on the ceiling with screws (screws are not included).
- 3 **POWER CONNECTION**
Connect to 220-240V.
Connect the earth cable.
- 4 Fix the cover on the mounting base with the socket screws.
- 5 Mount the cable holders on the ceiling with screws (screws are not included). Optional adjust the steel wire length.
- 6 Connect the cable to the luminaire.
- 7 Optional: shorten the cable to your required length.

7 How to reduce the length of the cable:

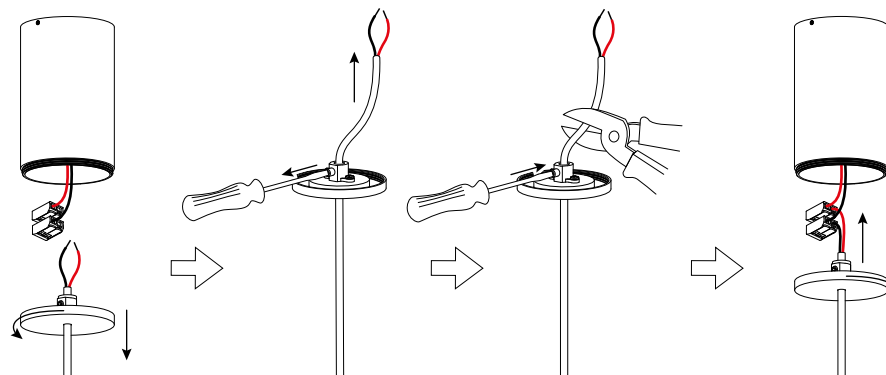

Driver must be powered off before connecting the cables.

Mounting base:

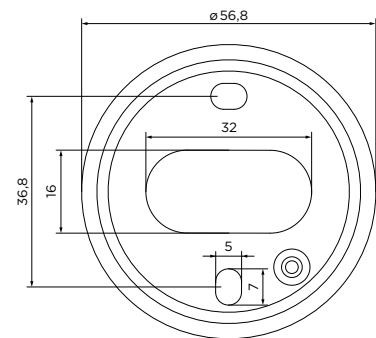


WEVER & DUCRÉ
LIGHTING


WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com

FLYRA HORIZONTAL

INSTALLATION INSTRUCTIONS | APRIL 2026

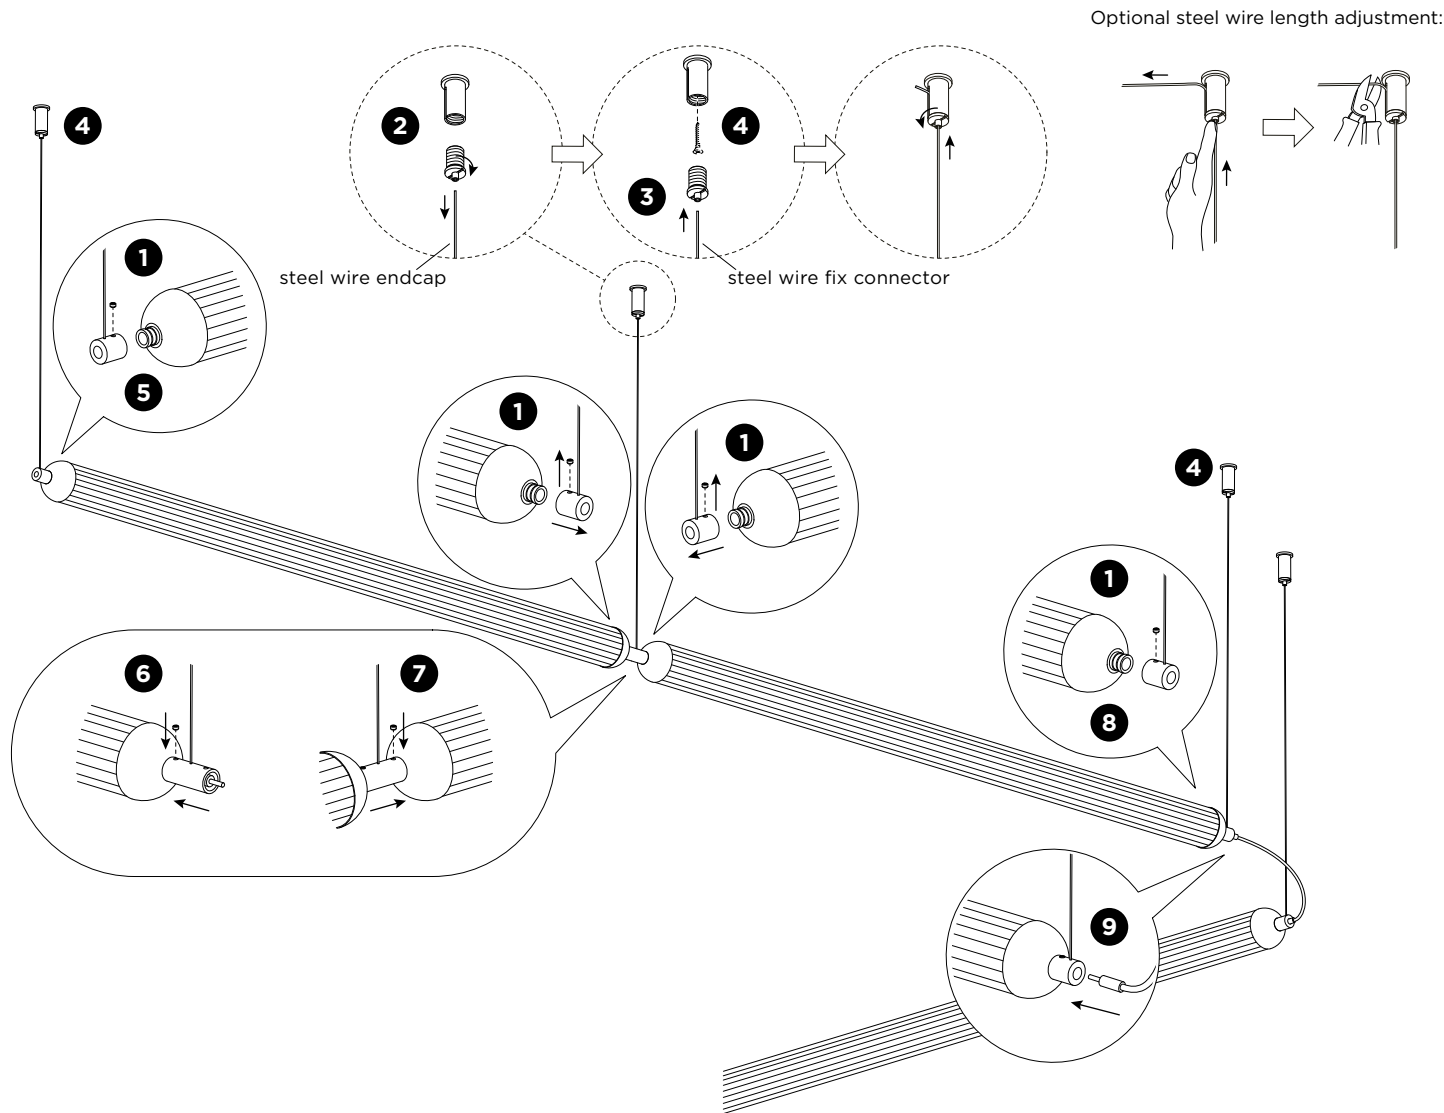

DIMENSIONS SYSTEM

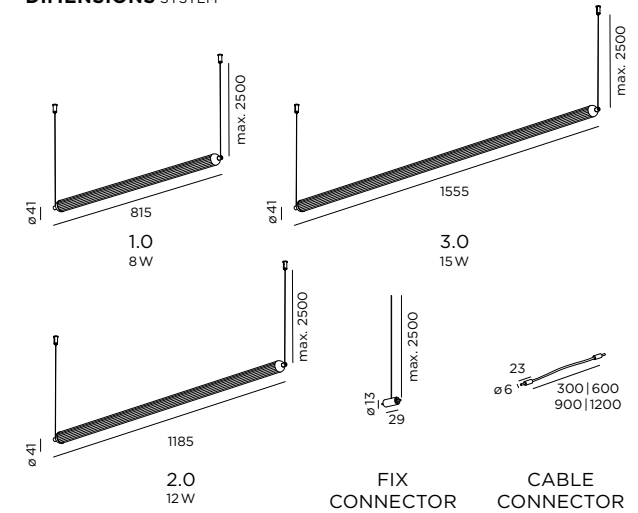


MOUNTING INSTRUCTION


- 1 For straight connection: remove the endcaps from both sides of the luminaires by loosening the socket screws.
- 2 Remove the steel wire attached to one of the removed endcaps from the cable holder.
- 3 Insert the steel wire from the fix connector in the cable holder.
- 4 Mount the cable holders on the ceiling with screws (screws are not included). Optional adjust the steel wire length.
- 5 Fix the endcap to one side of the first luminaire.
- 6 Plug in the fix connector to the other side of the luminaire and secure it with the socket screw.
- 7 Connect the second luminaire by plugging in the fix connector and secure the socket screw.
- 8 Fix the endcap to the other side of the luminaire.
- 9 For curved connection: plug in the cable connector into both luminaires.

FLYRA HORIZONTAL


INSTALLATION INSTRUCTIONS | APRIL 2026

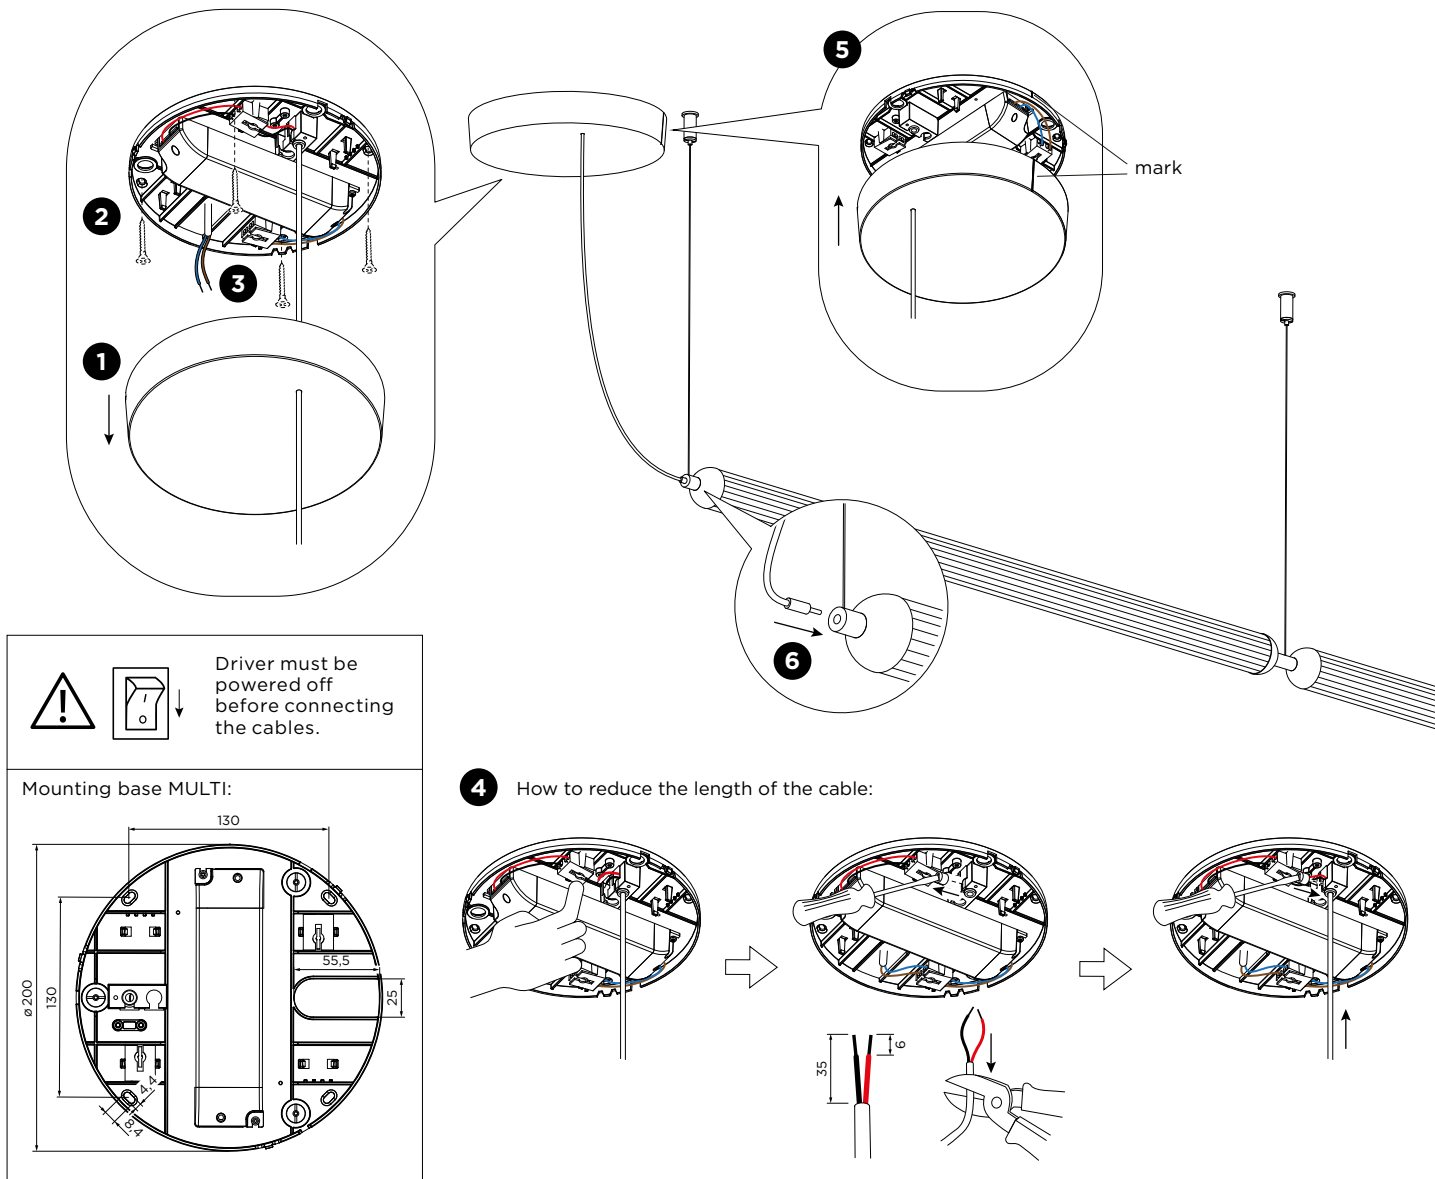

DIMENSIONS SYSTEM



SINGLE BASE
max. 25 W




MULTI BASE
max. 50 W

MOUNTING INSTRUCTION

For single base mounting please see page 1.

For multi base mounting:


- 1 Remove the cover of the mounting base by pulling.
- 2 Mount the base on the ceiling with screws (screws are not included).
- 3 **POWER CONNECTION**
Connect to 220-240V.
- 4 Optional: shorten the cable to your required length.
- 5 Align the marks on both of the mounting base and the cover. Push the cover on the mounting base until it clicks.
- 6 Connect the plug to the luminaire.





FLYRA HORIZONTAL

INSTALLATION INSTRUCTIONS | APRIL 2026

SINGLE BASE

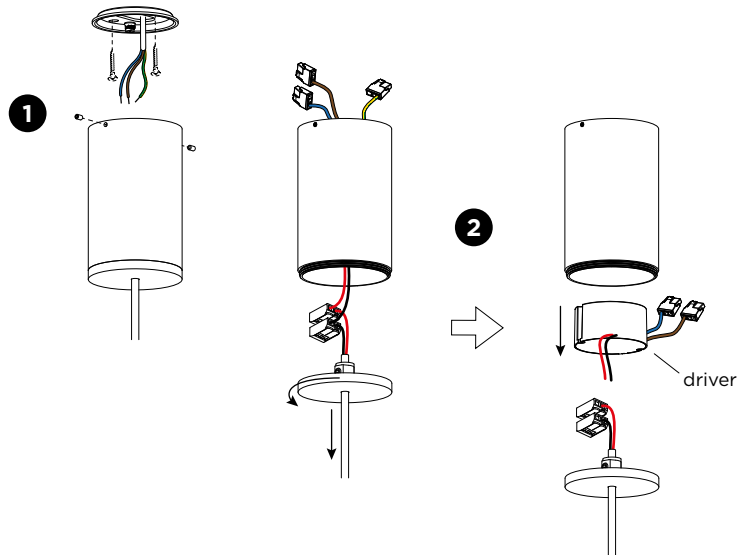


MULTI BASE

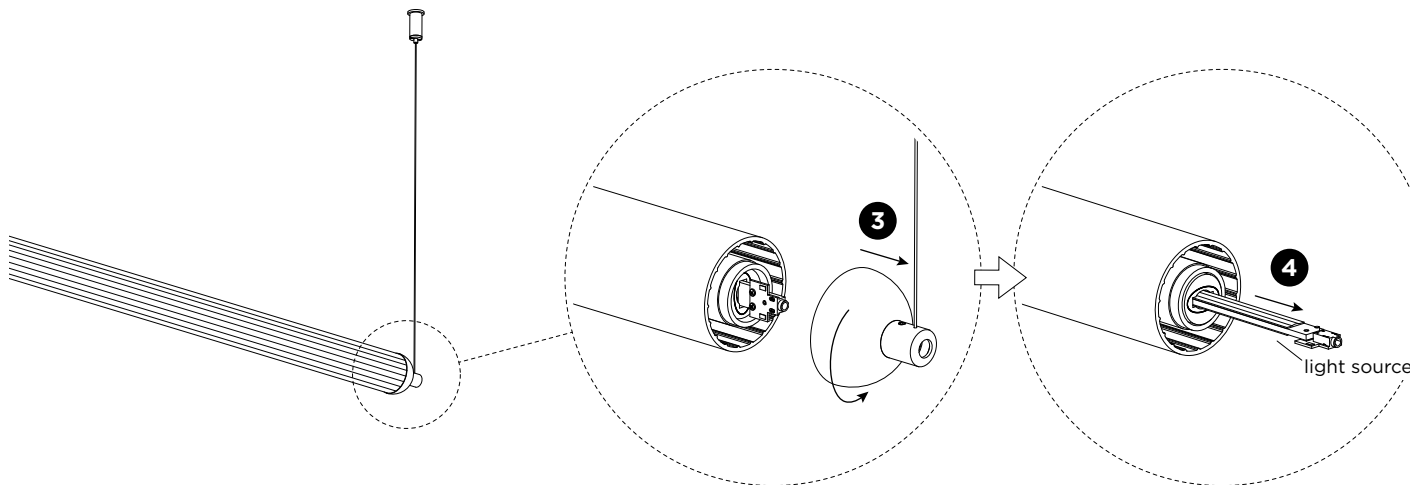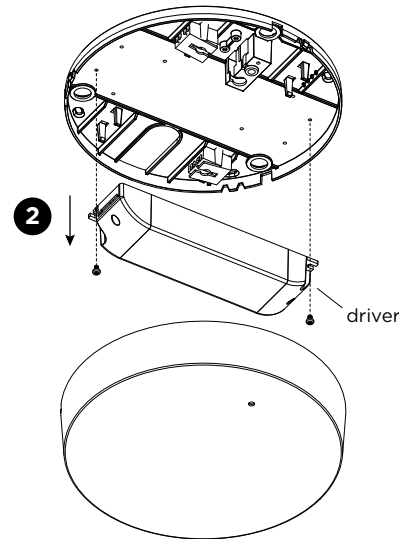


DISMOUNTING INSTRUCTION

Light source & driver

- 1 Loosen the socket screws and wires to remove the mounting base.
- 2 Open the ceiling base and disconnect the wires to remove the driver.
- 3 Unscrew the endcap.
- 4 Pull out the light source to remove it.



The driver can be replaced by the end user.



The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.



Use green electricity to light up your luminaire.