




# MIRBI LONG IP44

INSTALLATION INSTRUCTIONS | APRIL 2023


Necessary for IP-rating

|                    |                                                                                   |                                                    |                                           |
|--------------------|-----------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------|
|                    | A                                                                                 | B                                                  | C                                         |
| CABLE              |                                                                                   |                                                    |                                           |
| TYPE               | ROUND<br>H05RN-F<br>H07RN8-F<br>H07RN-F                                           | ROUND<br>H05RN-F                                   | ROUND                                     |
| OUTSIDE Ø          | min 6.8mm<br>max 8.9mm                                                            | min 5mm<br>max 6.8mm                               | min 1.5mm<br>max 2.6mm                    |
| CONDUCTION SECTION | 2or3x 0.75mm <sup>2</sup><br>2or3x 1.0mm <sup>2</sup><br>2or3x 1.5mm <sup>2</sup> | 2or3x 0.75mm <sup>2</sup><br>2x 1.0mm <sup>2</sup> | 0.75mm <sup>2</sup><br>1.5mm <sup>2</sup> |


Mounting base:

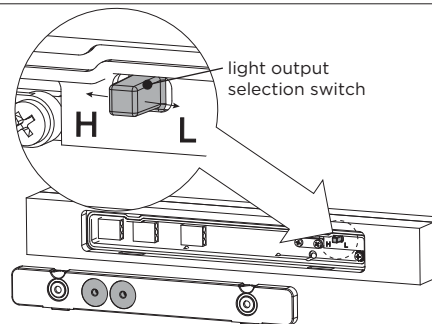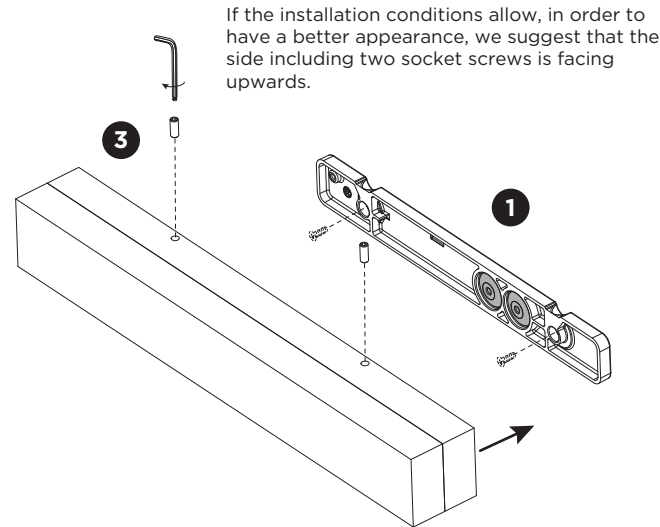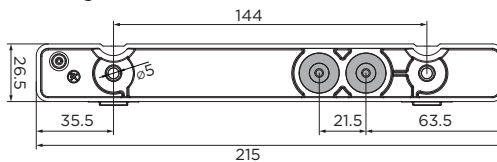

Product must be powered off before switching the output.




High light output



Low light output

## DIMENSIONS

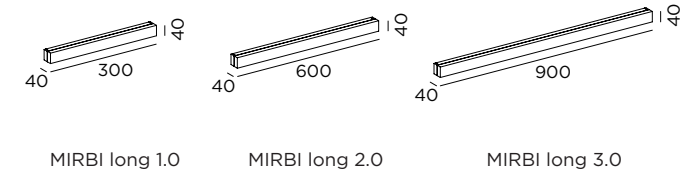


## MOUNTING INSTRUCTION

- 1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the wall with screws (screws are not included).

- 2 **POWER CONNECTION**

Connect to 220-240V.




Connect to the earth cable



- 3 Fix the luminaire on the base with 2 socket screws.

# MIRBI LONG IP44


INSTALLATION INSTRUCTIONS | APRIL 2023

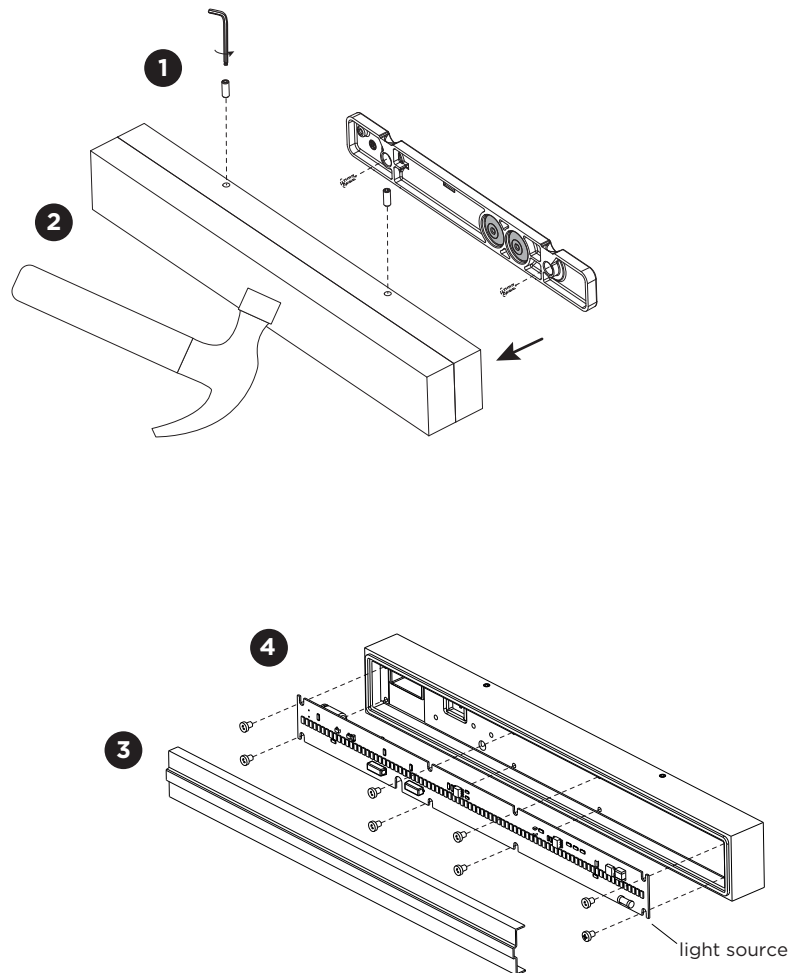

## DISMOUNTING AND RECYCLING INSTRUCTIONS

### Light source

- 1** Remove the fixture from the mounting base by removing the socket screws.
- 2** Break the glass.
- 3** Take off the cover.
- 4** Unscrew the light source and disconnect the wires to remove the light source.



The light source is not replaceable.



This luminaire contains a light source with the energy class F.