



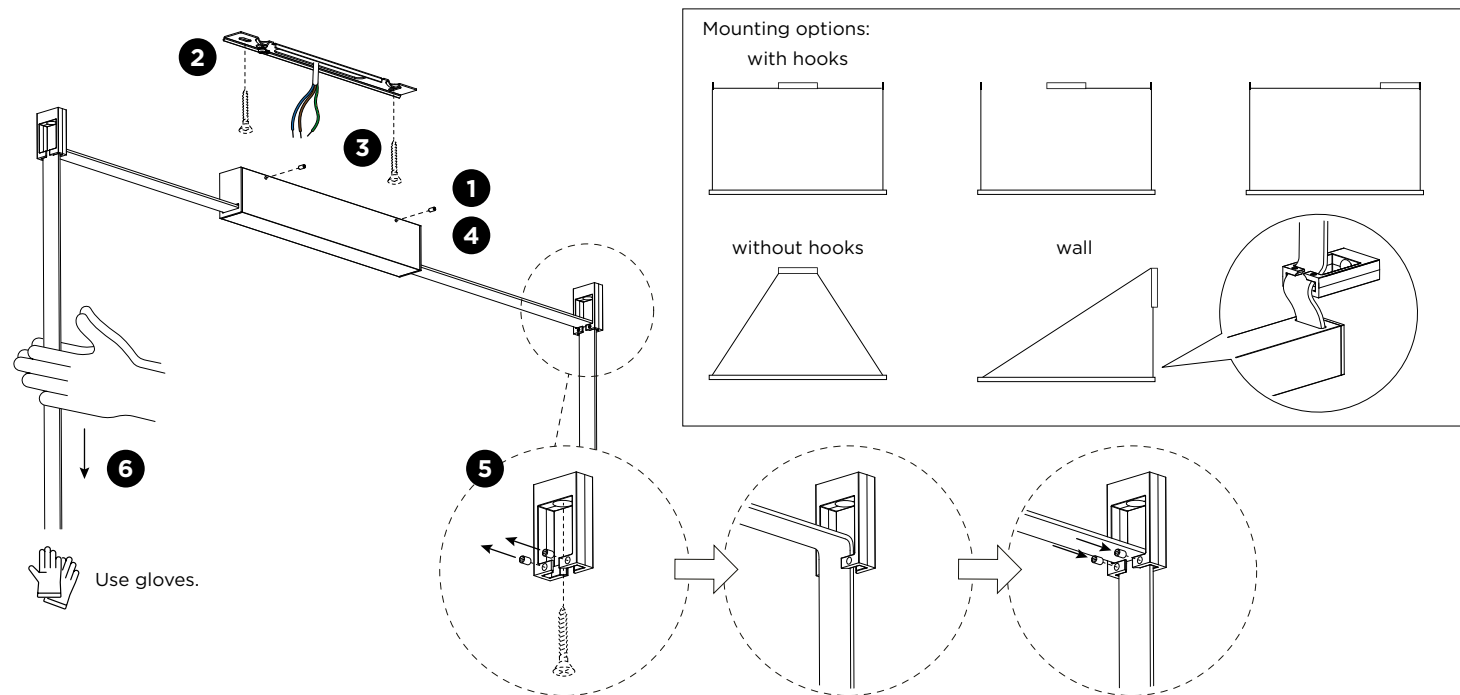


DIMENSIONS

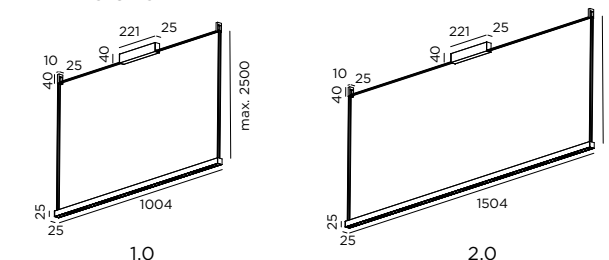


MOUNTING INSTRUCTION

- 1 Loosen the socket screws to remove the mounting base.
- 2 Mount the mounting base on the ceiling/wall with screws (screws are not included).
- 3 **POWER CONNECTION**
Connect to 220-240V.
Connect the earth cable.
- 4 Fix the luminaire on the mounting base with the socket screws.
- 5 For mounting with hooks:
Mount the hooks on the ceiling/wall with screws (screws are not included) and fix the cable with the socket screws.
- 6 Flatten the cable with gloves (included).
- 7 Optional shorten the non powered cable.
Cut the cable 20mm longer than your required length.
- 8 Optional shorten the powered cable.
Remove the cable from the ceiling base and cut it 60mm longer than your required length. After peeling the fabric the wire length should be 40mm. Put the protection cover over the wires and shrink it with heat. Insert the cable in the ceiling base and fix it in the strain relief. Connect the wires to the driver.


7 Optional shorten the cable (unpowered side):




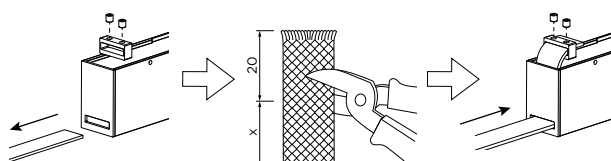


8 Optional shorten the cable (powered side):

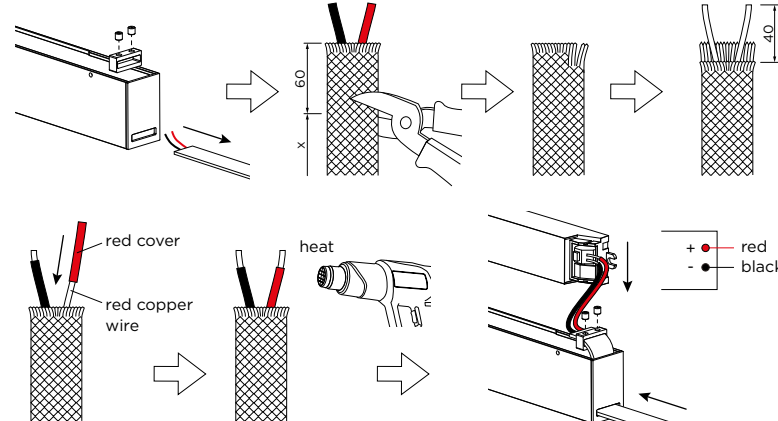

Mounting base:

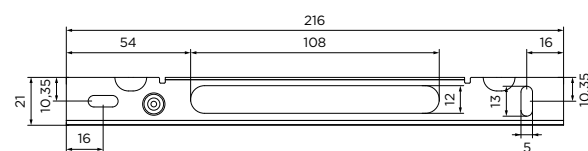


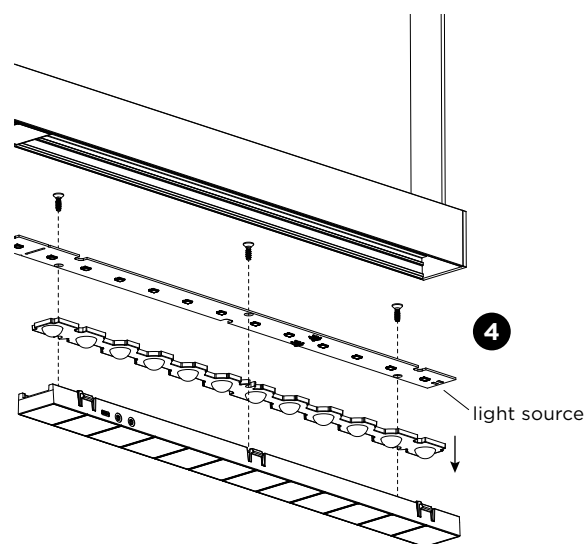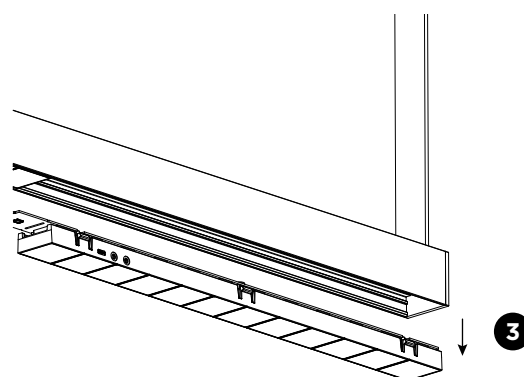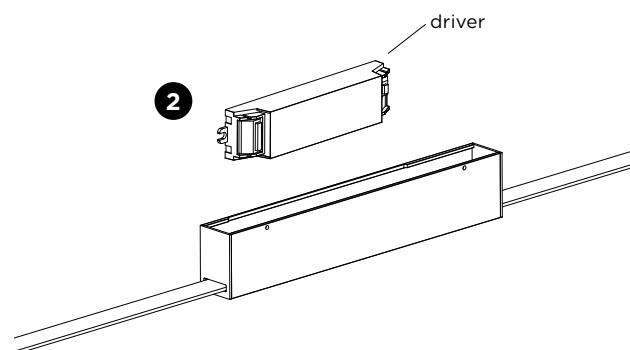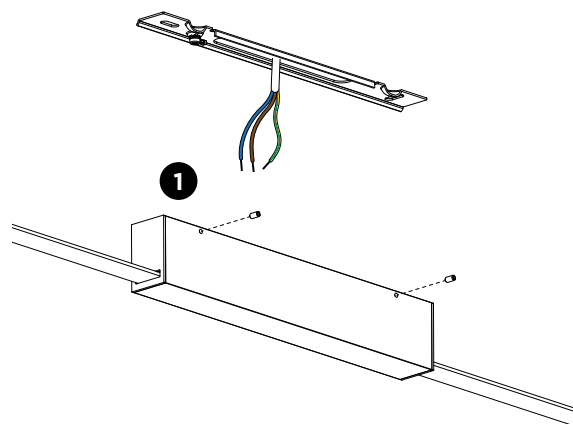


DISMOUNTING INSTRUCTION

Light source & driver

- 1 Loosen the socket screws to remove the mounting base.
- 2 Disconnect the wires and remove the driver.
- 3 Pull out the reflector from the profile.
- 4 Disconnect the wires and loosen the screws to remove the light source.




The driver can be replaced by the end user.



The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.



This luminaire contains a light source with the energy class E.



Use green electricity to light up your luminaire.