

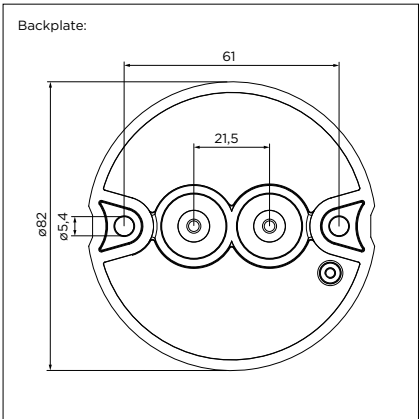



TRADORA SUSPENDED

INSTALLATION INSTRUCTIONS | AUGUST 2025

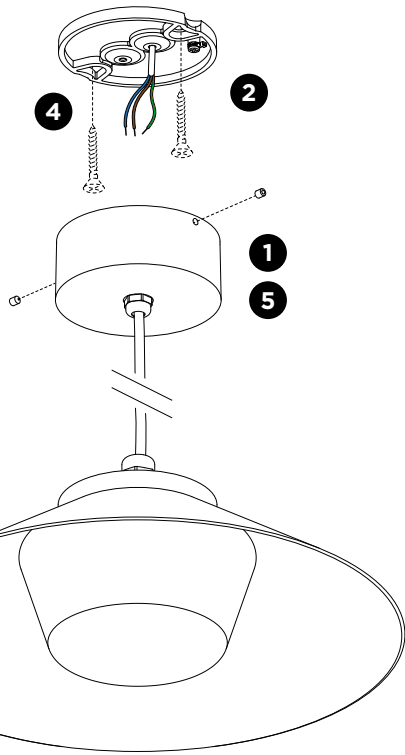


3 How to reduce the length of the cable.

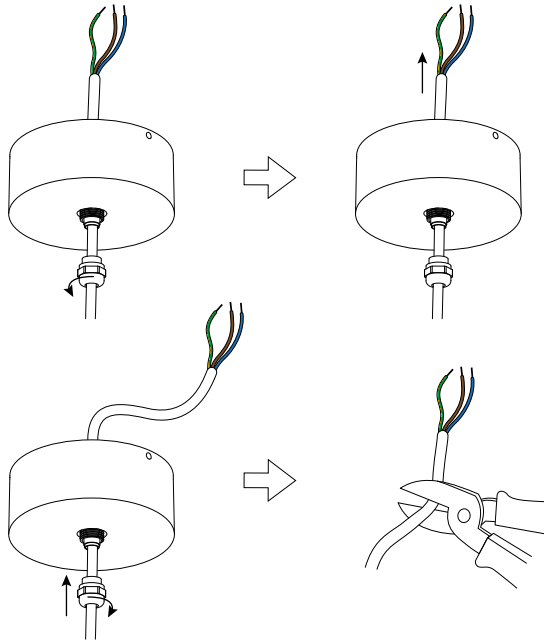


	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min. 6,8 mm max. 8,9 mm	min. 5 mm max. 6,5 mm	min. 1,5 mm max. 2,6 mm
CONDUCTION SECTION	2 or 3x0,75 mm² 2 or 3x1,0 mm² 2 or 3x1,5 mm²	2 or 3x0,75 mm² 2x1,0 mm²	0,75 mm² 1,5 mm²

DIMENSIONS




MOUNTING INSTRUCTION

- 1 Remove the backplate from the mounting base by loosening the socket screws.
- 2 Mount the backplate on the ceiling with screws (screws are not included).
- 3 Optional: shorten the cable to your required length by loosening the nut. Pull the cable and tighten the nut properly to ensure the waterproof integrity of the fixture.
- 4 POWER CONNECTION
Connect to 220-240V.




Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

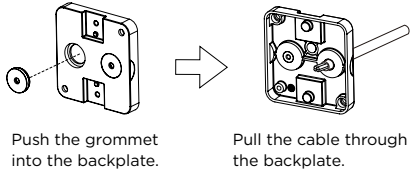

- 5 Fix the base on the backplate with the socket screws.


TRADORA SUSPENDED

INSTALLATION INSTRUCTIONS | AUGUST 2025

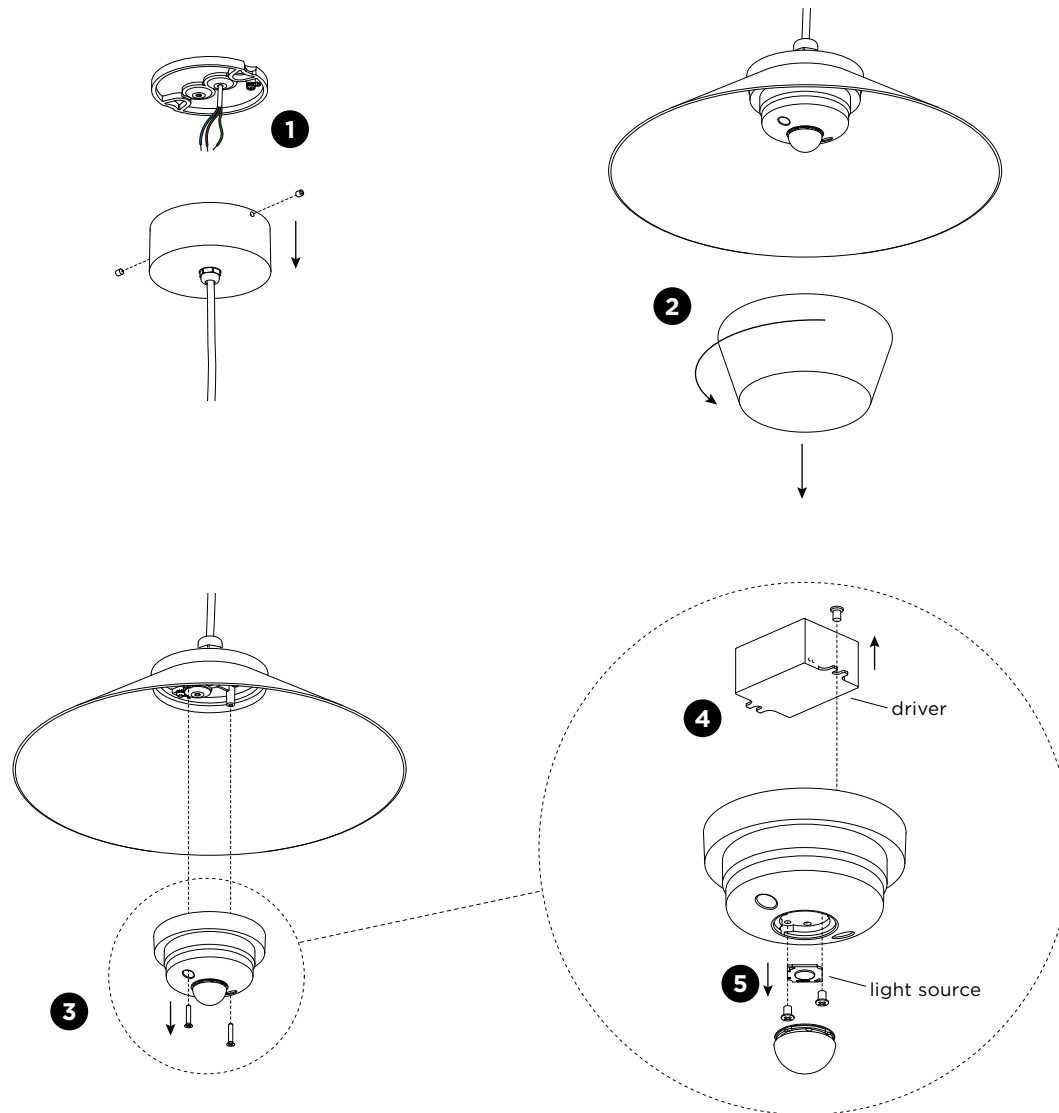


DISMOUNTING INSTRUCTION Light source & driver

- 1** Remove the backplate by loosening the socket screws and disconnect the wires.
- 2** Unscrew the glass to remove it.
- 3** Loosen the screws and disconnect the wires to remove the LED module.
- 4** Unscrew the driver and remove it.
- 5** Pull off the lens and loosen the screws to remove the light source.




The light source is replaceable by Wever & Ducreé or by a professional with explicit authorisation. For more information please contact your local Wever & Ducreé customer service point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class D.



Use green electricity to light up your luminaire.