



TRAM

INSTALLATION INSTRUCTIONS | JANUARY 2023



DIMENSIONS

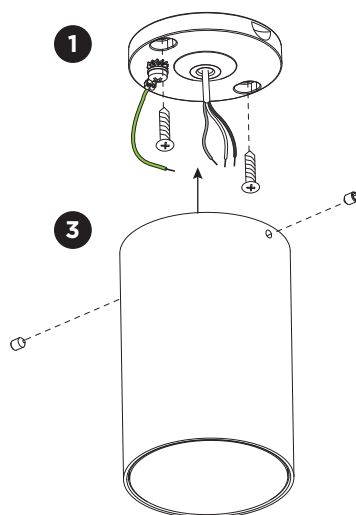


1.0 ROUND

MOUNTING INSTRUCTION

- 1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the ceiling with screws (screws and plugs (if necessary) are included).

- 2 POWER CONNECTION
Connect to 220-240V.




Connect the earth cable.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

for example:

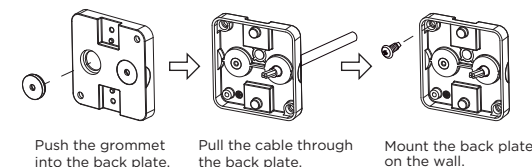


- 3 Fix the luminaire on the base with the socket screws.



Caution!
Because of the minimalistic design of this luminaire, space inside the luminaire for wiring through is very limited and not recommended.

Mounting base:

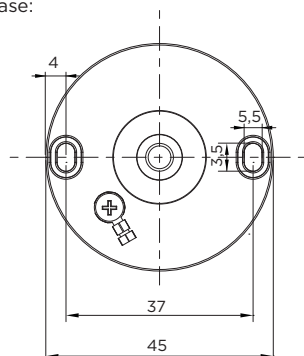

grommets:

	A	B	C
use pin to make hole, not a knife			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²




WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com

TRAM


INSTALLATION INSTRUCTIONS | JANUARY 2023

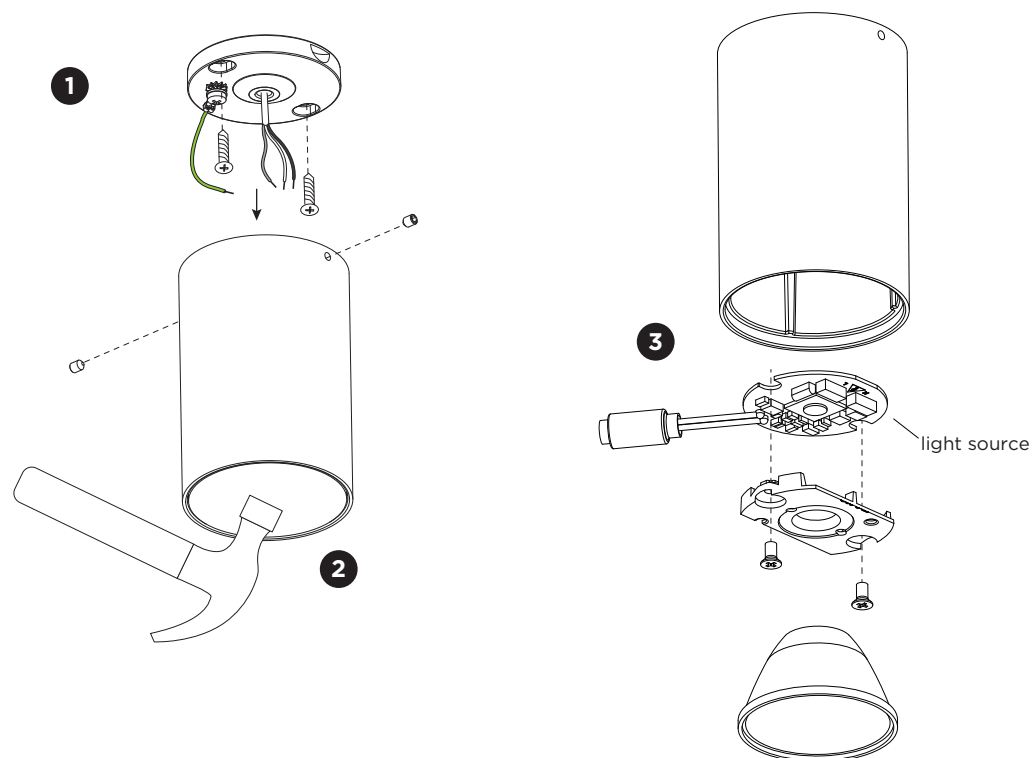

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1** Loosen the socket screws, disconnect the wires and remove the fixture from the mounting base.
- 2** Break the glass.
- 3** Take out the reflector and unscrew the holder to remove the light source.



The light source is not replaceable.



This luminaire contains a light source with the energy class F.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com