



TUBE CARRÉ wall 1.0 LED

INSTALLATION INSTRUCTIONS | AUGUST 2023

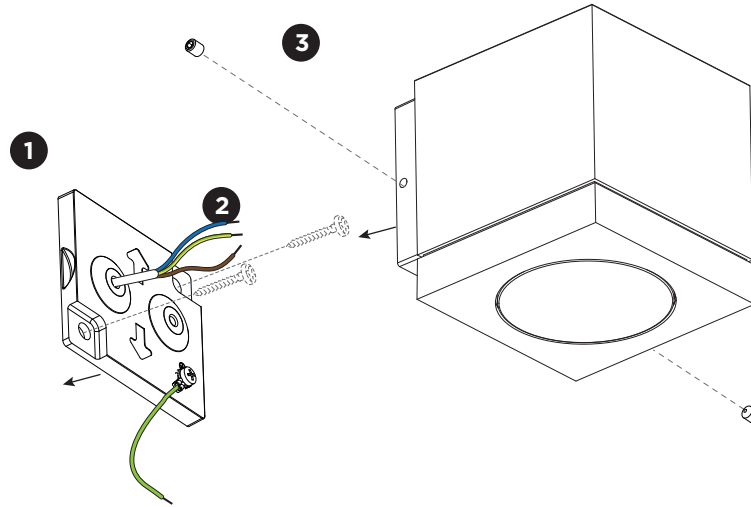

DIMENSIONS



1.0 LED


MOUNTING INSTRUCTION

- 1 Remove the mounting base by loosening the socket screws and fix it to the wall with screws (screws are not included).

- 2 **POWER CONNECTION**


Connect to 220-240V.

Connect the earth cable.




Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

for example:

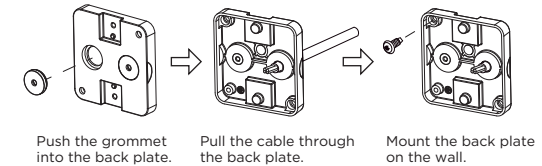

- 3 Fix the fixture to the mounting base with the socket screws.

Mounting base:

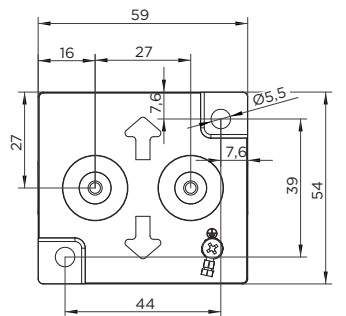

Always use a matching grommet in the overview table.

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²





WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com

PB19-010-846-00_v2

TUBE CARRÉ wall 1.0 LED

INSTALLATION INSTRUCTIONS | AUGUST 2023

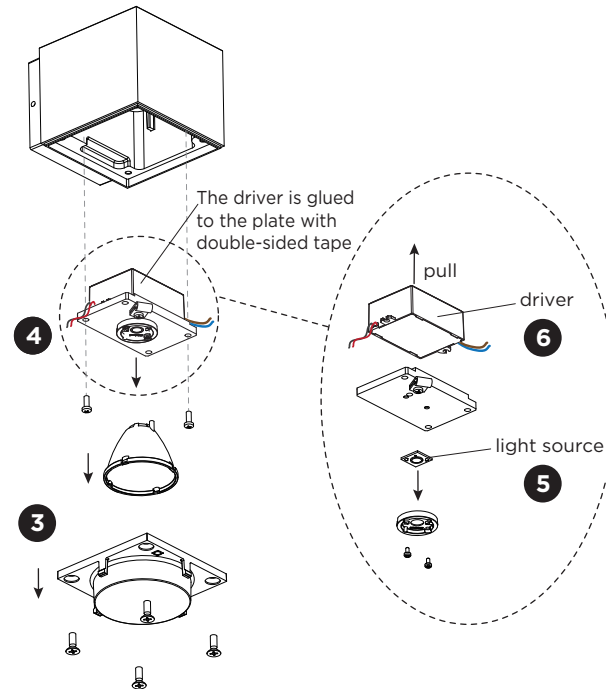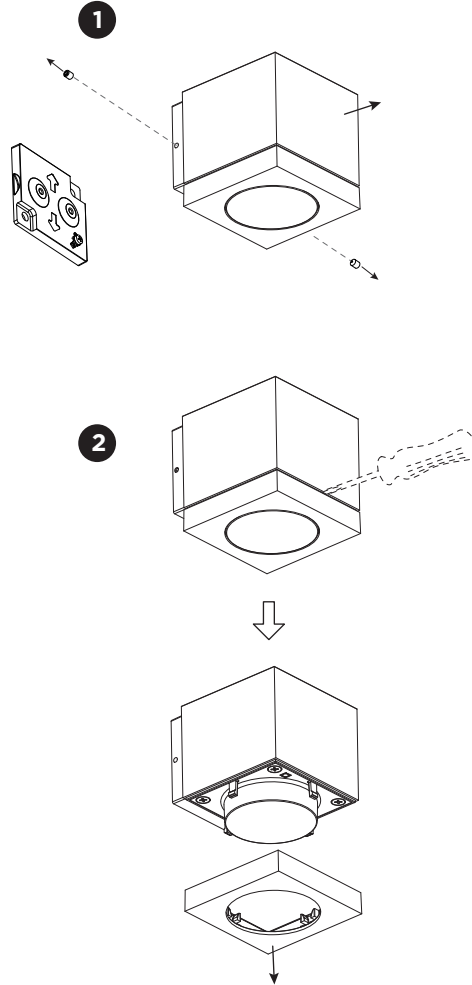


DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Dismount the fixture from the wall by loosening the socket screws and the wiring.
- 2 Remove the cover with a flat screwdriver.
- 3 Remove the diffuser and reflector.
- 4 Remove the driver and LED assembly.
- 5 Unscrew the holder to remove the light source.
- 6 Pull the driver from the plate.



The driver is replaceable by an authorized professional.
For advice contact your Wever & Ducré customer service contact point.



The light source is replaceable by an authorized professional.
For advice contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class D.