

# 30 DEGREES

PRODUCT FACT SHEET



## 30 DEGREES

DESIGN BY JOHAN VAN HENGEL, 2016


30 Degrees is a lightweight shade made of laminated oak veneer. The seamless surface is achieved by aligning the ends of semicircular veneer sheets at a 30 Degrees angle, so the inside cone and internal angle is always 30 Degrees. The layering of the conical veneer creates a solid shade that is opaque and characterized by its harmonious woodgrain pattern. Rich in tactility, the series express a natural elegant aesthetic. All shades are sealed with a matt lacquer and supplied with a moulded locator fitting, which levels and supports the shade when suspended.

### HIGHLIGHTS


- Part of a progressive and technologically advanced lighting collection.
- A visually lightweight wooden directional pendant available in a variety of sizes.
- CE approved.
- Utilising a standard retro fit LED bulb (E27).
- The cord set for the lamps is sold separately.
- The cord set comes without a bulb.
- Suitable for both private and office environments.
- Qualified for contract use.
- For indoor use only.

---


### DIMENSIONS



**SMALL**  
DIAMETER 24 CM  
HEIGHT 17 CM

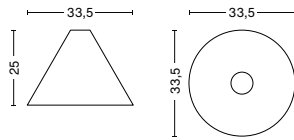

**MEDIUM**  
DIAMETER 33,5 CM  
HEIGHT 25 CM

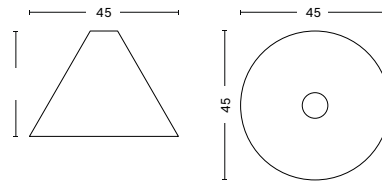

**LARGE**  
DIAMETER 45 CM  
HEIGHT 35 CM

### MATERIALS

#### SHADE

Laminated oak veneer.

#### CORDSET

The cord set is sold separately.  
Please note that the cord set is in black only.

### COLOUR & FINISH

Please note that the colour codes are indicative.




**NATURAL OAK**  
VENEER



## CORD SET PENDANT

A versatile ceiling mounted Cord Set that allows for multiple cable configurations. The ceiling mount is round, made from ABS plastic and contains a magnet for easy fitting. The fabric cable can be adjusted in length to suit the environment. The design is compatible with all HAY lamps that are based around a standard removable E27 light fitting.

### DIMENSIONS



DIAMETER 10,5 CM  
CORD LENGTH 400 CM  
HEIGHT 4,5 CM

### MATERIALS

FITTING  
Injection moulded ABS.

CORD  
Braided fabric with silicone insulation.

CEILING MOUNT  
Textured ABS.

### COLOUR & FINISH

Please note that the colour codes are indicative.



SOFT BLACK

## SMALL

### TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	RECOMMENDED POWER (WATTS)	DIMMBLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A19)	5-8W (max. 15W)	Yes**	220-240V AC at 50/60Hz	400 cm	No

\*Bulb not included.

\*\*If used in conjunction with a wall mounted dimmer and suitable LED bulb.

### TEST SPECIFICATIONS

FLUX (LUMENS) 500-800lm	CCT (KELVIN) & CRI (1-100) The levels will vary depending on the type of bulb used in the lamp.
----------------------------	--

## SMALL

### TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	RECOMMENDED POWER (WATTS)	DIMMBLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A19)	10-13W (max. 15W)	Yes**	220-240V AC at 50/60Hz	400 cm	No

\*Bulb not included.

\*\*If used in conjunction with a wall mounted dimmer and suitable LED bulb.

### TEST SPECIFICATIONS

FLUX (LUMENS) 1000-1500lm	CCT (KELVIN) & CRI (1-100) The levels will vary depending on the type of bulb used in the lamp.
------------------------------	--

### CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

**LED**   IP20  

Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including:

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

### COUNTRY OF ORIGIN

China

### DOWNLOADS

Packshots and lifestyle photos, 2D 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)