



Wall Lights | 220-240 V
3 topLED 19 W DC - 20 W AC | CRI 90

8690



165 | 150 | 722

Technical data

| | |
|--|---------------------|
| Construction year | 2019 |
| Type | Wall Lights |
| Installation position | Wall lights |
| Installation environment | Indoor |
| Light Source | LED |
| Circuit structure | topLED |
| Optics | Diffused |
| Light emission direction | downward and upward |
| Nominal power | 19 W DC |
| Total Power | 20 W |
| Source lumens | 2076 lm |
| Nominal input voltage | 220 - 240 V AC |
| Input voltage range | 220 - 240 V AC |
| Frequency | 60 - 50 Hz |
| CCT / Tone | 2700 K |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | Phase cut |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 2.195 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

Finishing casing

| | |
|------------|---------|
| Material | metal |
| Colour | White |
| Processing | Coating |

Finishing diffuser

| | |
|----------|------------|
| Material | PC |
| Colour | Opal white |

Wall Lights | 220-240 V | 3 topLED 19 W DC - 20 W AC | CRI 90 | Base
8690

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 72 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2076 lm, with a 109.3 lm/W nominal luminous efficacy.

The device body is made of metal and features a white finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2.195 kg.

The total absorbed power is 20 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains 3 light sources of energy efficiency class F.

Illuminotechnical Features


| | |
|---|----------------|
| Light Output Ratio (LOR) | 65 % |
| Source lumens | 2076 lm |
| Delivered lumens | 1356 lm |
| Consumption | 20 W |
| Luminaire efficacy | 67 lm/W |
| Colour temperature | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25°C |

LED Life / Failure Ratio

L70 B20 C0 72500h

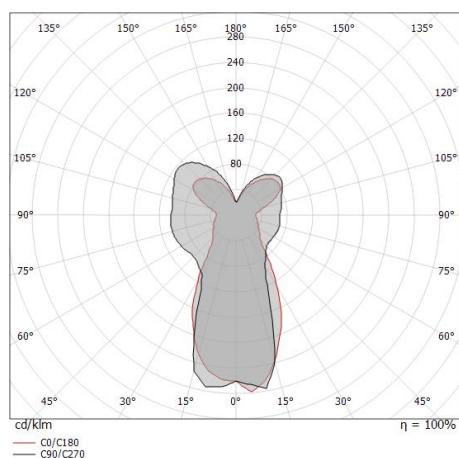


Honey | Wall Lights | Accessories
8690



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
220-240V

Code

KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
Radio-frequenza, 85-240V

Code

KIT0080