

VENDOME 70


360°

VENDOME 70 360° B2C BRASS B 300 CL1 PY MR
Compact wall light fitting



Description

- VENDOME 70 360° compact wall light fitting (design : Normal Studio)
- For ambient lighting with honeycomb perforation grid
- Grid with BRASS finishing
- Housing: borosilicate-glass diffuser for inside/outside use
- End caps & fixing straps: 316L stainless steel brass finishing sensitive to scratches, handle with care
- Brass anodised aluminium grid inserted between housing and an internal film in high efficiency white polycarbonate
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- E14 socket fixed on the dismantlable end cap
- Gaskets: Gaskets moulded in EPDM

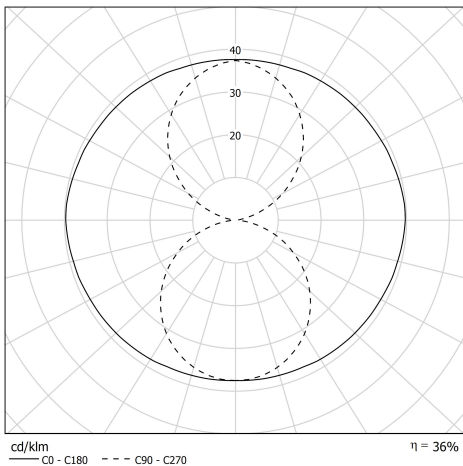


Light specifications and controlling

- With 1 clear LED E14 filament lamp (4W 2700K)
- Luminous flux: 110 lm
- non dimmable

Installation and maintenance

- Diameter: 70 mm
- Total length: 270 mm
- Provided with 0,50m 3G1,5 cable with tinned copper meshwork under transparent tubing
- Connection to 3x2.5mm² automatic terminal block
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing
- Installation in vertical position, cable gland positioned downwards
- Maintenance by removal of the end cap



Characteristics

- Warranty : 5 years
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK07
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- T°C with incandescent wires: non-flammable
- Weight: 0,97 kg
- Designed and made in France