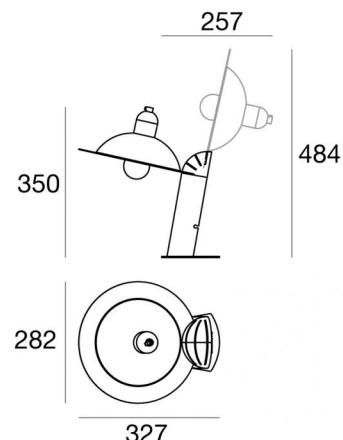


Table Lamps | 220-240 V | 1x7W E27

8973

**Technical data**

| | |
|--|---------------------|
| Designer | De Pas - D'urbino - |
| Construction year | 1971 |
| Type | Table Lamps |
| Installation position | Floor |
| Installation environment | Indoor |
| Bulb included | Yes |
| Lamp cap | 1 x E27 |
| Light emission direction | downward |
| Frequency | 50-60 Hz |
| Optics | Diffused |
| Safety class | 2 |
| IP | IP20 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Electric socket | Type L |
| Cable length | 2 m |
| Resin potting | No |
| Net weight | 2.17 Kg |

Finishing casing

| | |
|------------|----------------|
| Material | ABS |
| Colour | Red RAL 3000 |
| Processing | Powder coating |

Finishing diffuser

| | |
|------------|---------------------------------|
| Material | Aluminium - Aluminium |
| Colour | White RAL 9016 - Red RAL 2002 |
| Processing | Powder coating - Powder coating |

Finishing base

| | |
|----------|----------------|
| Material | AISI 304 steel |
| Colour | steel |

Table Lamps | 220-240 V | 1x7W E27
8973

Single emission table lamps for indoor application. LED lamp included, lamp cap E27 1x7W.

The device body is made of ABS and features a red ral 3000 finish, processed by means of powder coating; the diffuser is made of aluminium with a powder coating treatment; the diffuser is made of aluminium with a powder coating treatment. The ingress protection degree is IP20; the total weight is of 2.17 kg.

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

| | |
|------------------------|------------|
| Source lumens | 650 lm |
| Colour temperature | 2700 K |
| Colour rendering index | 80 Ra |
| Source lumens | 1 x 650 lm |