


Pendant Luminaires | 220-240 V | 1x11W E27

8990

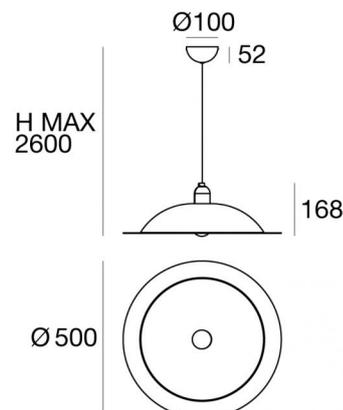

| Technical data | |
|--|---------------------|
| Designer | De Pas - D'urbino - |
| Construction year | 1971 |
| Type | Pendant Luminaires |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Bulb included | Yes |
| Lamp cap | 1 x E27 |
| Light emission direction | downward |
| Frequency | 50-60 Hz |
| Optics | Diffused |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 2.5 m |
| Resin potting | No |
| Net weight | 1.44 Kg |

| Finishing diffuser | |
|--------------------|----------------------------------|
| Material | Aluminium - Aluminium |
| Colour | RAL 1003 Yellow - White RAL 9016 |
| Processing | Powder coating - Powder coating |

| Finishing mounting frame | |
|--------------------------|----------------|
| Material | metal |
| Colour | White RAL 9016 |
| Processing | Coating |

| Cables Pendant Luminaires | |
|---------------------------|---------|
| Max cable length | 2500 mm |

Pendant Luminaires | 220-240 V | 1x11W E27
8990

Single emission pendant luminaires for indoor application. LED lamplamp included, lamp cap E27 1x11W.

The diffuser is made of aluminium with a powder coating treatment the diffuser is made of aluminium with a powder coating treatment; the mounting frame is made of metal, with a white ral 9016 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.44 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class A+.

Illuminotechnical Features

| | |
|------------------------|-------------|
| Source lumens | 1520 lm |
| Colour temperature | 2700 K |
| Colour rendering index | 80 Ra |
| Source lumens | 1 x 1520 lm |