


Table Lamps | 220-240 V | 1x7W E27

9066

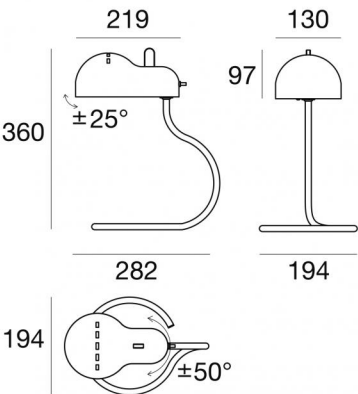

Technical data	
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Bulb included	Yes
Lamp cap	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optics	Diffused
Safety class	2
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	Yes
total angle (horizontal plane)	100 °
total angle (vertical plane)	50 °
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	1.5 m
Resin potting	No
Net weight	0.9350000000000001 Kg

Finishing diffuser	
Material	metal - metal
Colour	White RAL 9016
Processing	Coating - Coating

Finishing base	
Material	metal
Colour	chrome
Processing	Electroplating

Table Lamps | 220-240 V | 1x7W E27 | Base
9066

Single emission table lamps for indoor application. LED lamplamp included, lamp cap E27 1x7W.

The diffuser is made of metal with a coating treatment the diffuser is made of metal with a coating treatment. The ingress protection degree is IP20; the total weight is of 0.9350000000000001 kg.

The power supply cable is included and features a 1.5 m length.

The device features protection class II and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class
This product contains a light source of energy efficiency class E.

Illuminotechnical Features	
Light Output Ratio (LOR)	60 %
Source lumens	806 lm
Delivered lumens	485 lm
Consumption	7 W
Luminaire efficacy	115 lm/W
Colour temperature	2700 K
Colour rendering index	80 Ra
Source lumens	1 x 806 lm

UGR	
UGR axial	24
UGR transversal	23.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
C0/C180 optics	125°
Light distribution simmetry	Symmetrical

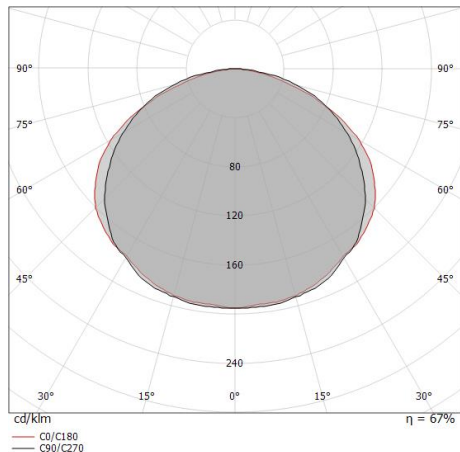

0.5	1.91 2.07	E(0°) E(C90) E(C0)	630 31 26
	3.83 4.14	E(0°) E(C90) E(C0)	158 8 7
	5.74 6.21	E(0°) E(C90) E(C0)	70 3 3
2.0	7.65 8.27	E(0°) E(C90) E(C0)	39 2 2
	9.56 10.34	E(0°) E(C90) E(C0)	25 1 1
	11.48 12.41	E(0°) E(C90) E(C0)	18 1 1
Distance [m]	Cone diameter [m]	Illuminance [lx]	
— C0/C180 (Half-peak divergence: 128.4°) — C90/C270 (Half-peak divergence: 124.8°)			