



# CorePro GLASS LED candles and lustres

## CorePro LEDLusterND4.3-40W E14 827P45FRG

Featuring a classic heritage design, these filament LED candles combine the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb is a very easy choice for people who are looking for a retrofit LED replacement, it provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

### Product data

General information	
Cap base	E14 [E14]
Nominal lifetime	15,000 h
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere

Light technical	
Colour Code	827 [CCT of 2700K]
Luminous Flux	470 lm
Colour designation	Warm White (WW)
Correlated Colour Temperature	2700 K
Luminous Efficacy (rated) (Nom)	109.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %

Operating and electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	4.3 W
Lamp current (nom.)	35 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (nom.)	220-240 V

Temperature	
T-Case maximum (nom.)	55 °C

Controls and dimming	
Dimmable	No

# CorePro GLASS LED candles and lustres

## Mechanical and housing

Lamp Finish	Frosted
Bulb shape	P45 [P 45 mm]


## Approval and application

Energy Efficiency Class	F
Energy consumption kWh/1,000 hours	5 kWh
EPREL registration number	387384
CE mark	Yes
EU RoHS compliant	Yes

## Product data



Full EOC	871951434720500
Order product name	CorePro LEDLusterND4.3-40W E14 827P45FRG
Order code	34720500
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
Material number (12NC)	929001345592
Full product name	CorePro LEDLusterND4.3-40W E14 827P45FRG
EAN/UPC – Case	8719514347212

## Dimensional drawing

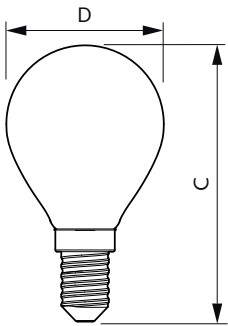

Product	D	C
CorePro LEDLusterND4.3-40W E14 827P45FRG	45 mm	80 mm

## Photometric data

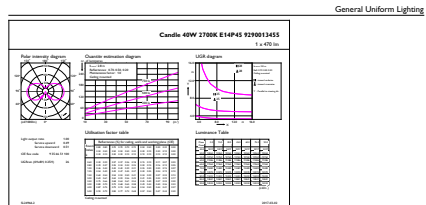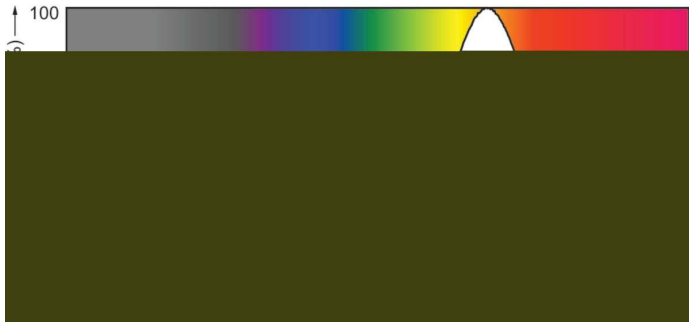


© Philips Lighting B.V. Page 1/1

Spectral Power Distribution Colour - CorePro LEDLusterND4.3-40W E14 827P45FRG

General uniform lighting - CorePro LEDLusterND4.3-40W E14 827P45FRG


# CorePro GLASS LED candles and lustres

## Photometric data

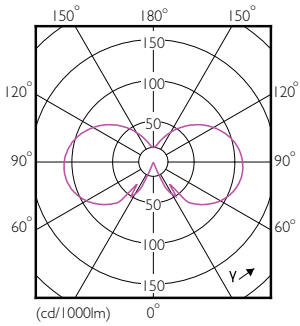


Light Distribution Diagram - CorePro LEDLusterND4.3-40W E14 827P45FRG

## Lifetime

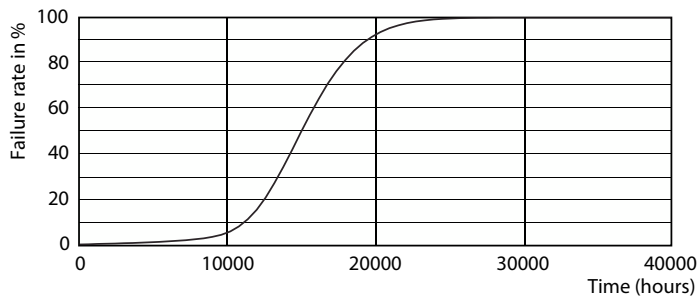

Life Expectancy Diagram - CorePro LEDLusterND4.3-40W E14 827P45FRG

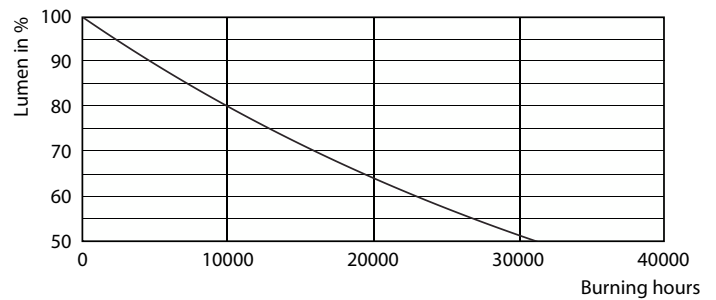

Lumen Maintenance Diagram - CorePro LEDLusterND4.3-40W E14 827P45FRG

