


AJ FLOOR LAMP

AJ Floor Lamp - 5744171928

The fixture emits downward directed light. The angle of the screen can be adjusted approximately 90 degrees up and down to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.



Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



**Carl Hansen &
Son Showroom**



Sparekassen Vendsyssel

Product info

Information

Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina.

Mounting

<p>2.4 m. Cord with plug.
On/off foot switch provided.</p>

Finish

White, Black, Pale Petroleum, Warm Sand, Soft Lemon, Electric Orange, Dusty Blue, Warm Grey, Stainless Steel Polished.

Black and Warm Grey comes in solid colour or with polished brass.

Materials


Shade: Spun steel or stainless steel.
Base: Die cast zinc or stainless steel.
Stem: Steel, stainless steel or brass.

Class

Ingress protection IP20. Electric shock protection II.

Information


Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina.

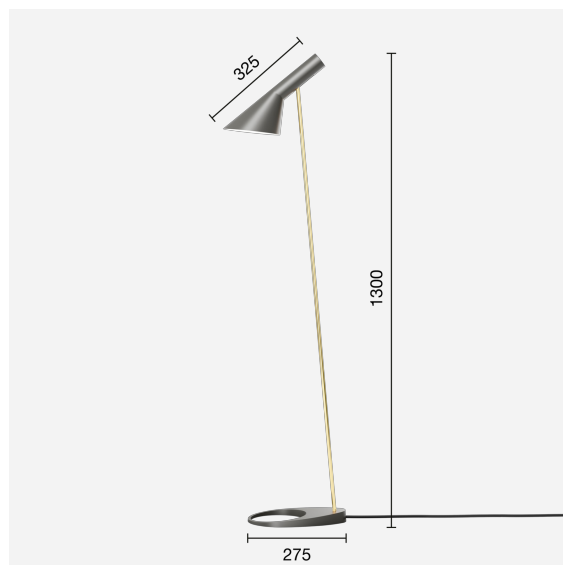


Related products



AJ Table Lamp



AJ Wall Lamp



AJ 50 Outdoor Wall Lamp



AJ Mini Table Lamp



AJ Royal Pendant



AJ Garden Bollard



AJ Oxford Table Lamp

Spare parts & accessories

| Product | Variant number |
|-------------------|----------------|
| Black foot switch | 5717000000 |
| White foot switch | 5717000013 |

Data specifications

| | | | |
|-------------------------|-----------------|-------------------------------------|-----|
| Colour | Brass/warm grey | Length | - |
| Width | - | Height | - |
| Built-in Height | - | IP class | - |
| Class | - | Net Weight | 3.8 |
| Standby (W) | - | Power Factor (P = 100 % / P = 50 %) | - |
| Inrush Current | - | Light source | - |
| Kelvin | - | CRI | - |
| SDCM | - | Lumen | - |
| Watt | 7.5 | Efficacy | - |
| Light control | - | Min. Dim Level (%) | - |
| UGR Transversal / Axial | - | L80B50 (hours) | - |
| Driver life | - | | |