



Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm

Nahtrang Studio

Pendant Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm LED 19 SW 2700-3000-4000K CASAMBI Black 1381lm

Technical features



Luminaire total power: 19W
Real lumens: 1381 (3000K)
Real lm/W: 73
Correlated Colour Temperature (CCT): SW 2700-3000-4000K
Lens / reflector angle: HORIZONTAL 102°
Structure material: Steel
Structure finish: Black
Diffuser material: Glass
Diffuser finish: Fumé
Voltage / frequency: 110-277V/50-60Hz
Dimming protocol: CASAMBI
Power Factor: NULL
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire



Luminotechnic features

CRI: 90
MacAdam steps: 3
Photobiological risk: RG1

Lampholder	Quantity	Light source power (W)
LED	1	17.2W

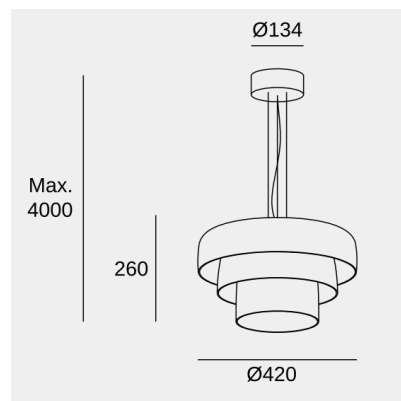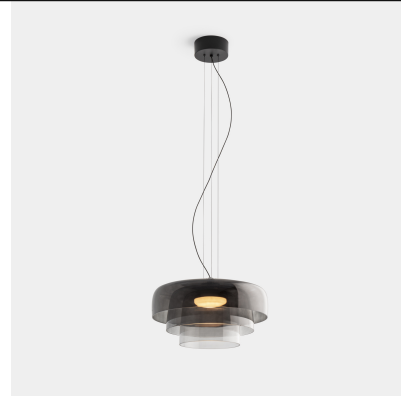

This product may require programming by a specialist. LedsC4 offers consulting services on control systems and programming in the factory or on-site. Ask your sales agent for more info.

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.




Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm

Nahtrang Studio

Pendant Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm LED 19 SW 2700-3000-4000K CASAMBI Black 1381lm

Bluetooth range



The Bluetooth range largely depends on the obstacles and architectural features of a space, such as walls and building materials

Logistics



x 1

Net weight (kg): 5.67

Packaged weight (kg): 7.29

Packaging: 520mm x 530mm x 540mm

This product may require programming by a specialist. LedsC4 offers consulting services on control systems and programming in the factory or on-site. Ask your sales agent for more info.

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.