


BYSTED GARDEN BOLLARD

Bysted Garden Bollard - 5747405730

The bollard has a round symmetrical design with four downward-angled rings reflecting the light in a soft downward direction. The rings provide a soft glow while the white underside ensures optimal light reflection and produces a characteristic symmetric light pattern on the ground.

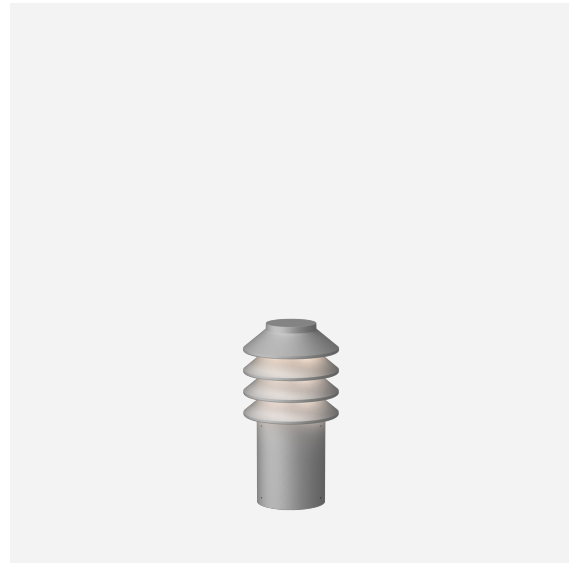

Peter Bysted

Peter Bysted graduated as an architect and industrial designer from The Aarhus School of Architecture in 1978. Three years prior, in a contest arranged by Louis Poulsen concerning the illumination of quarters worthy of preservation, he won second prize with 'Bysted', a bollard made from cor-ten steel, suggesting his interest in lighting design even then.



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

Mounting

Bysted Garden is fitted with external adaptor, a maximum of 4 Bysted Garden bollards (14 W) can be run by one adaptor. The adaptor and installation cables must be bought separately. Maximum distance to last bollard is 30 m. Stem: Ø95 mm. Spike mounting: Put the bollard with the spike into the ground and let the cable run over the ground. The bollard is connected to the adaptor with the enclosed 5 m. cable and T-connector. Plug-and-Play. Anchor mounting: Anchor unit to be fixed in concrete. Use installation cables for in-ground installation for legal fixed installation. Looping is approved. Requires installation by certified electrician. Baseplate mounting: Mounting on a surface. Use installation cables for in-ground installation for legal fixed installation. Looping is approved. Requires installation by certified electrician.

Finish

Aluminium, Corten, or Black coloured. Textured surface, powder coated.

Materials

Top: Cast aluminium. Reflector part: Cast aluminium. Post: Extruded aluminium. Base plate, spike and anchor: Cast aluminium. Diffuser: PC

Sizes and weights

Width x Height x Length (mm) | 132 x 534 x 132 Max 4.6 kg | 132 x 519 x 132 Max 4.1 kg | 132 x 799 x 132 Max 5.3 kg | 132 x 254 x 132 Max 4.0 kg

Class

Ingress protection w/spike: IP 65 Ingress protection w/anchor: IP 65 (Head), IP44 (Anchor) Ingress protection w/base plate: IP 65 (Head), IP44 (Baseplate) Electric shock protection III IK06



Light source

LED 3000K 14W

Lumen: 288

Information

This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

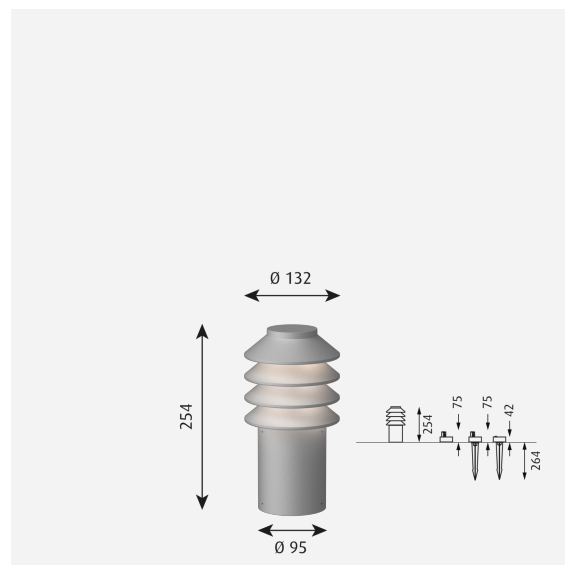


Bysted


Related products

Light distribution diagrams


Cartesian

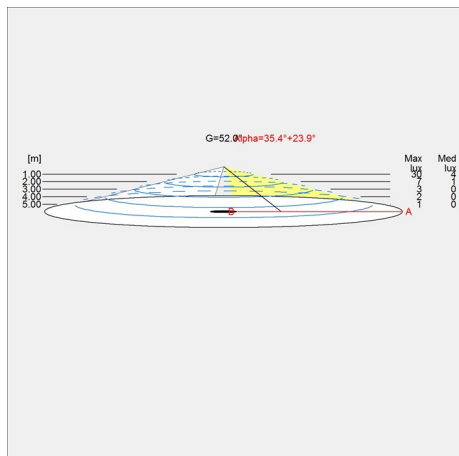

Isolux

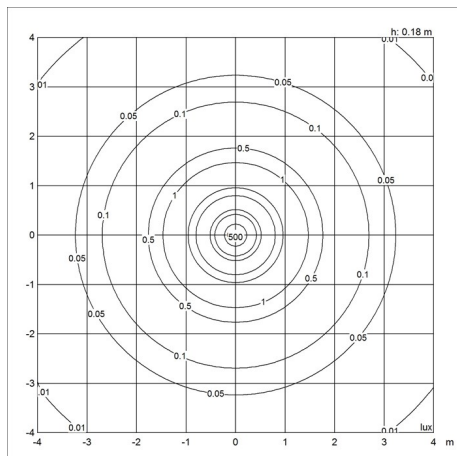

Polar

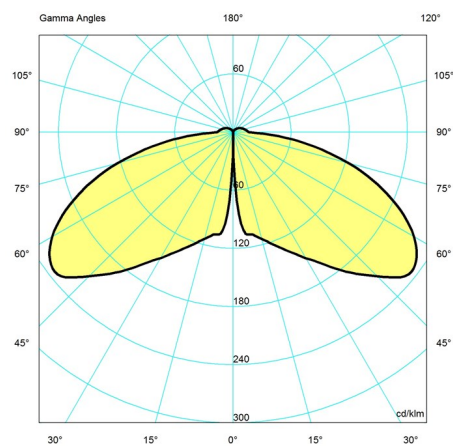

Spare parts & accessories

Product	Variant number
T-Connector for Spike-Mount Garden Bollards	5747405303
Garden adapterbox cable 3x1	5747407039
BYSTED GARDEN REP.KIT COB/PCB 4K	5747405811
BYSTED GARDEN REP.KIT COB/PCB 3K	5747405824
BYSTED GARDEN REP.KIT COB/PCB 27K	5747405837

Data specifications

Colour	Aluminium colour texture	Length	132
Width	132	Height	519
IP class	-	IK class	-
Class	III	Net Weight	4.1
Wind Load (m2)	-	Standby (W)	-
Power Factor (P = 100 % / P = 50 %)	-	Inrush Current	-

Bysted Garden Bollard
3000

Light source	LED 3000K 14W
CRI	90
Lumen	288
Efficacy	21
Min. Dim Level (%)	-
BUG Rating	B0 U2 G0
Driver life	>50.000

Kelvin	
SDCM	3
Watt	14
Light control	-
Surge Protection	-
L80B50 (hours)	>50.000