




## Description

- ELGAR PUSH Vertical wall light fitting with flux turned to the ground
- Color: COAL (RAL 7021)
- Internal anodized finishing aluminum gear unit cover : PETROL
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 316L painted COAL (RAL 7021)
- Longitudinal louvre in aluminum petrol color with inclined lamina
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- Gear tray: Internal grey lacquered steel gear tray RAL 9006
- Gaskets: Gaskets moulded in EPDM
- Integrated push-button on the end cap

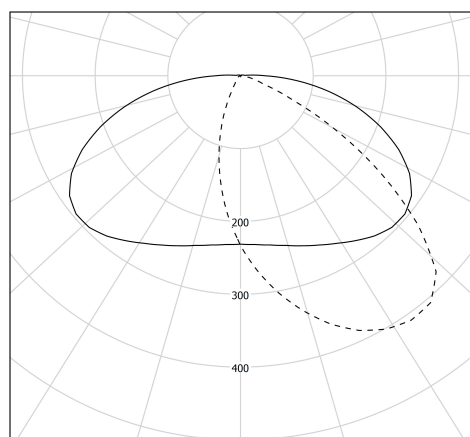

cd/klm  
— C0 - C180    - - - C90 - C270


$\eta = 100\%$

## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 275 lm
- Colour temperature: 2700 K
- Specific satin-finish primary diffuser optic
- Reversible longitudinal louvre
- Constant Current Driver for dimming by integrated push-button

## Installation and maintenance

- Diameter: 70 mm
- Total length: 430 mm
- Cable entry with nickel-coated brass cable gland for cable  $\varnothing$  5 - 12 mm
- Supplied with a 2 x 0.75 mm<sup>2</sup> black 2 m cable with a European plug for indoor use
- Connection to 2x2.5mm<sup>2</sup> automatic terminal block
- 2 reinforced fixing straps in stainless steel with variable centre distance and allowing 360° orientation
- Opening and closing by tightening the nut on the cable gland
- Installation vertical: position cable gland positioned downwards
- Maintenance by removing the end cap and sliding the guided gear plate
- Easily removable LED modules and driver

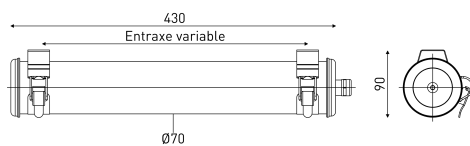

## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -25 °C to +35 °C
- Imperviousness: IP65, for indoor use
- Resistance to IK shocks: IK10
- Electrical class: Class II
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 7 W
- Photobiological hazard: Group 0
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 130 pcs
- Weight: 1,1 kg
- Designed and made in France

