
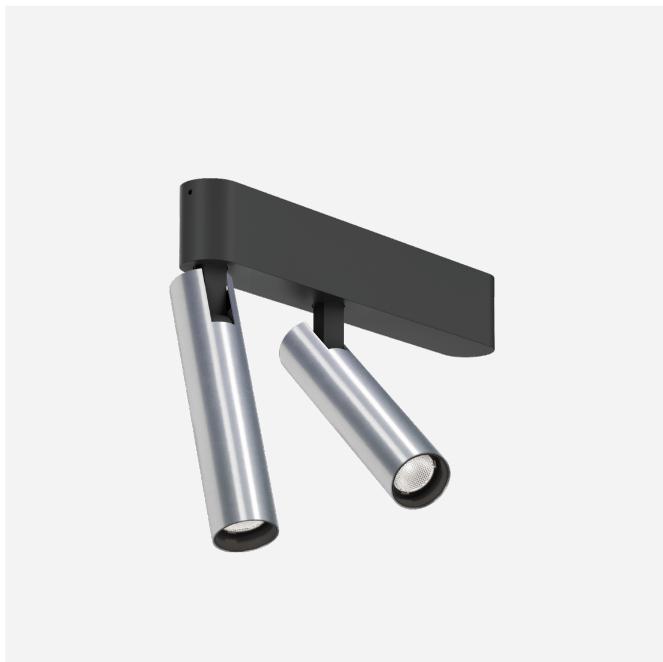





**PROJECT**
**TYPE**
**NOTES**
**QUANTITY**
**DATE**


Ceiling surface luminaire with 2 spotlights; made from die-cast aluminium; surface Black Matt + Aluminium; powder coated; matt texture + wet painted; brushed; RAL 9011; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; beam angle 30°; 350° rotatable and 90° tiltable; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by an authorized professional;


**GENERAL**

Ceiling  
Surface  
tilt max 90 °  
rotation 350 °  
Black Matt + Aluminium  
RAL 9011 <sup>a</sup>  
IP20  
Interior  
1090 lm  
CIE flux code: 97 100 100 100  
100

**LIGHT DISTRIBUTION**

**LED**

2700 K  
CRI  $\geq 90$   
L80 / 50000h  
initial MacAdam  $\leq 2$  SDCM

**OPTICAL**

Standard  
beam angle 30°

**ELECTRICAL**

phase-cut dim  
220 - 240 V  
system 17.5 W  
Class 1

**PHYSICAL**

length 200 mm  
width 26 mm  
height 117 mm  
0.42 kg

<sup>a</sup> Colour may deviate slightly due to production conditions.

**CONE DIAGRAM**

standard 31°

h (m)	E0° (lx)	Ø (m)
1	1510	0.56
2	380	1.12
3	170	1.67
4	90	2.23
5	60	2.79