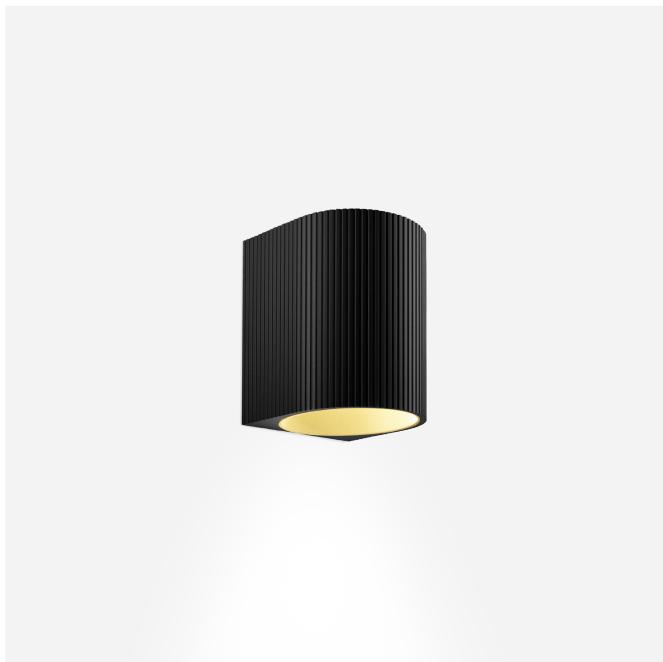
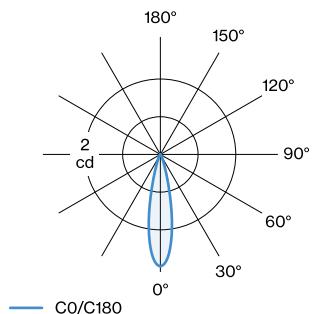



**PROJECT**
**TYPE**
**NOTES**
**QUANTITY**
**DATE**


Wall surface luminaire made from aluminium; surface Black Matt + Champagne; up or down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq$  2 SDCM; CRI  $\geq$  90; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by an authorized professional;

**GENERAL**

Wall  
Surface  
Black Matt + Champagne  
IP20  
Interior  
605 lm  
CIE flux code: 93 98 100 100 0

**LIGHT DISTRIBUTION**

**LED**

3000 K  
CRI  $\geq$  90  
L80 / 50000h  
initial MacAdam  $\leq$  2 SDCM

**OPTICAL**


Standard  
beam angle 22°

**ELECTRICAL**

phase-cut dim  
220 - 240 V  
system 8.1 W  
Class 1

**PHYSICAL**

length 70 mm  
width 80 mm  
height 100 mm  
0.42 kg



[333164CH5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · [www.weverducre.com](http://www.weverducre.com)