



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality & accessories	Page 3
5. Photometric data and technical information	Page 3
6. Ordering codes	Page 4
7. Certifications & standards	Page 5
8. Maintenance & Cleaning	Page 5

Versions:



CIR_3824
Page 4



CIR_3825
Page 4

Circ

ceiling light

1. Product overview

Ceiling light providing soft, diffused illumination through satin-finished opal glass shades, which emit a gentle glow suitable for ambient lighting. Its design enhances contemporary spaces with circular P.E.T. acoustic panels, adding both visual appeal and acoustic comfort. The system allows the creation of different compositions.



2. Finishes and Materials



Shade: Glass

Canopy: 26 Black

Body: 97 Light Grey

3. Light Source & Dimming

Lamping per head:

LED 6,2W (2700K / Ang. 120° / >90 CRI / 350mA) 230V / Typ* 725 lumens

*Integrated LED module (included).

Dimming options:


Standard: TRIAC

Optional: DALI, CASAMBI

4. Functionality & Accessories

Possible combinations:

Versions and sizes available for projects. Consult our offices.

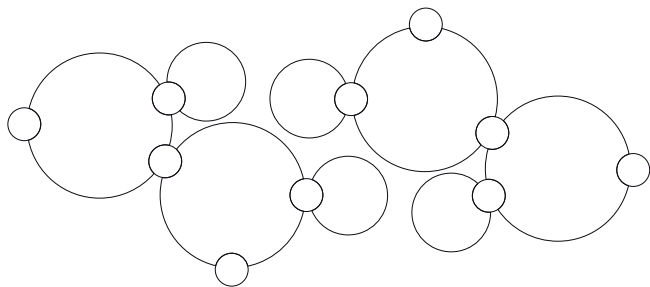

Acoustic Foam Panels:

The acoustic panels, seamlessly integrated into the luminaire's design, help improve the acoustic comfort of the space. They are made from 60% of PET from recycled bottles and 40% of PET from new bottles. The standard version features 9 mm thick panels with a sound absorption coefficient (α) of 0.25. For project specific applications, thicker panels are available on request to provide enhanced acoustic absorption.




View the Fire Safety Laboratory Certificate [here](#).

View the Acoustic Absorption Coefficient Certificate [here](#).

5. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp. Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area [here](#).



Circ

ceiling light

6. Ordering Codes

Lamping 3824S

LED 3x6,2W (2700K / Ang 120° / >90 CRI / 350mA)
230V / Typ* 3x725 lumens

Canopy: Single

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes

Canopy: 26 Black Body: 97 Light Grey



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
CIR_3824S	Surface mounted. Driver in the canopy.	Black	Light Grey	CIR_3824S

Lamping 3825S

LED 5x6,2W (2700K / Ang 120° / >90 CRI / 350mA)
230V / Typ* 5x725 lumens

Canopy: Single

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes

Canopy: 26 Black Body: 97 Light Grey



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
CIR_3825S	Surface mounted. Driver in the canopy.	Black	Light Grey	CIR_3825S

7. Certifications & Standards



Warranty: 2 years

100% made in Spain

8. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.