

# FLOS

 F1070039 Green

## Bellhop Floor

Designed by Edward Barber and Jay Osgerby, 2020

26W - 1023lm - 2700K - CRI> 90

Floor lamp with indirect light. Stem in painted aluminium: shiny white, brick, cioko, green. Reflector in shiny opal white and grey blown glass. Electrical cable of 270 cm usable length with foot dimmer switch for ON/OFF function and brightness adjustment 10–100%. Power supply with interchangeable plugs.



Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607039724       |
| Mounting               | Floor               |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED array           |
| Power (W)              | 26                  |
| System power (W)       | 26                  |
| System flux (lm)       | 1023                |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Green |
| Length (mm)         | 260   |
| Cord colour         | Black |
| Cord length (mm)    | 2700  |
| Net weight (kg)     | 9.82  |
| Package volume (m3) | 0.05  |
| IP internal         | 20    |



### Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  LDT


### Technical Drawings

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing



Photometric


|                    |                |
|--------------------|----------------|
| Lighting type      | Indirect       |
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| CRI>               | 90             |
| Extreme cut off    | No             |

Electrical


|                    |                                     |
|--------------------|-------------------------------------|
| Insulation class   | III                                 |
| Frequency (Hz)     | 50/60                               |
| Main voltage (Vac) | 100-240                             |
| LED current (mA)   | 700                                 |
| Power supply       | Remote included                     |
| Dimmable           | Yes                                 |
| Power supply type  | Electronic 48V                      |
| Dimming interface  | Switch Integrated (Remote Dimmable) |
| Plug type          | Type G, Type A, Type C              |
| Batteries inside   | No                                  |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

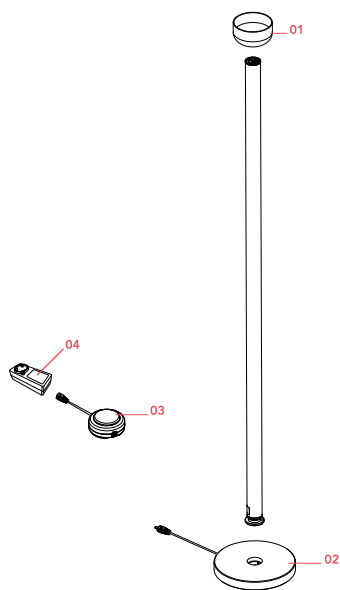

|     |                                         |           |
|-----|-----------------------------------------|-----------|
| 01. | Bellhop F Reflector White               | F1073009  |
| 02. | Bellhop F Base Concrete                 | F1072009  |
| 03. | Switch Dimmer Assembly<br>700mA         | RF30216   |
| 04. | Black plug assembly kit & 48V<br>driver | RF6600130 |



F1073009

Bellhop F Reflector White



F1072009

Bellhop F Base Concrete



RF30216

Switch Dimmer Assembly 700mA



RF6600130

Black plug assembly kit & 48V driver