


Table Lamps | 220-240 V  
1 arrayLED 9 W DC - 11 W AC | CRI 90

9711

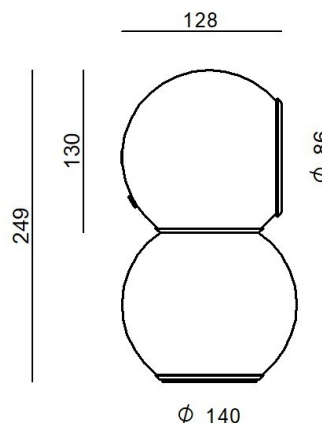

| Technical data                                 |                 |
|------------------------------------------------|-----------------|
| Type                                           | Table Lamps     |
| Installation position                          | Floor           |
| Installation environment                       | Indoor          |
| Light Source                                   | LED             |
| Circuit structure                              | arrayLED        |
| Optics                                         | Diffused        |
| Light emission direction                       | downward        |
| Nominal power                                  | 9 W DC          |
| Total Power                                    | 11 W            |
| Source lumens                                  | 1079 lm         |
| Nominal input voltage                          | 220 - 240 V AC  |
| Input voltage range                            | 220 - 240 V AC  |
| Frequency                                      | 50 - 60 Hz      |
| CCT / Tone                                     | 3000 K          |
| Colour rendering index                         | 90 Ra           |
| C.C. / C.V.                                    | AC              |
| Safety class                                   | 2               |
| IP                                             | IP20            |
| Glow wire test                                 | 850°            |
| Direct mounting on normally flammable surfaces | Yes             |
| CE                                             | Yes             |
| Driver included                                | Driver          |
| Dimmable article                               | PUSH DIM        |
| Directional                                    | Swivelling      |
| total angle (horizontal plane)                 | 360 °           |
| Tilting                                        | No              |
| Walk-over                                      | No              |
| Drive-over                                     | No              |
| Cable included                                 | Yes             |
| Electric socket                                | Type C          |
| Cable length                                   | 2 m             |
| Resin potting                                  | No              |
| Type of light emission                         | Single emission |
| Net weight                                     | 3,170 Kg        |
| Electrostatic discharge protection             | No              |
| Surge protection                               | No              |

#### Finishing casing

|            |                |
|------------|----------------|
| Material   | Iron           |
| Colour     | White RAL 9016 |
| Processing | Coating        |

#### Finishing diffuser

|          |             |
|----------|-------------|
| Material | PC          |
| Colour   | transparent |

#### Finishing base

|            |                |
|------------|----------------|
| Material   | Iron           |
| Colour     | White RAL 9016 |
| Processing | Coating        |

Table Lamps | 220-240 V | 1 arrayLED 9 W DC - 11 W AC | CRI 90 | Base 9711



Single emission table lamps for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1079 lm, with a 119.9 lm/W nominal luminous efficacy.

The device body is made of iron and features a white ral 9016 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20;

The total absorbed power is 11 W The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

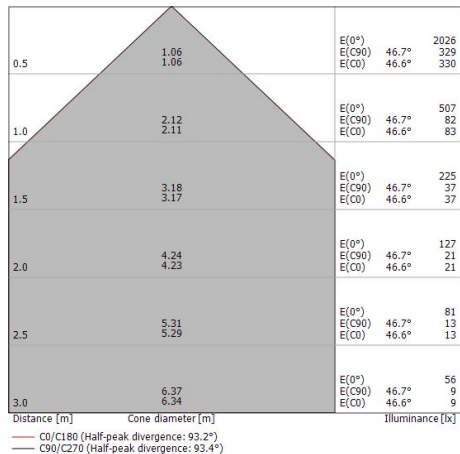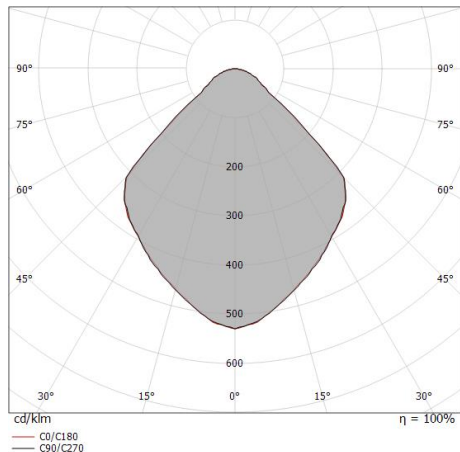

| Energy efficiency class                                            |                |
|--------------------------------------------------------------------|----------------|
| This product contains a light source of energy efficiency class D. |                |
| Illuminotechnical Features                                         |                |
| Light Output Ratio (LOR)                                           | 88 %           |
| Source lumens                                                      | 1079 lm        |
| Delivered lumens                                                   | 956 lm         |
| Consumption                                                        | 11 W           |
| Luminaire efficacy                                                 | 86 lm/W        |
| Colour temperature                                                 | 3000 K         |
| Standard Deviation of Colour Matching                              | 3 Step MacAdam |
| Colour rendering index                                             | 90 Ra          |
| Junction temperature (lighting fixture)                            | 80             |
| Standard Operating Ambient Temperature                             | -20 / +50°C    |
| LED Life / Failure Ratio                                           |                |
| L80 B20 C0 80000h                                                  |                |
| UGR                                                                |                |
| UGR transversal                                                    | 22.7           |
| UGR axial                                                          | 22.8           |
| X=4H   Y=8H                                                        | S=0.25H        |
| Reflection factor                                                  | 70/50/20       |
| OPTICAL                                                            |                |
| C0/C180 optics                                                     | 93°            |
| Light distribution simmetry                                        | Symmetrical    |