


w242 Pastille alu

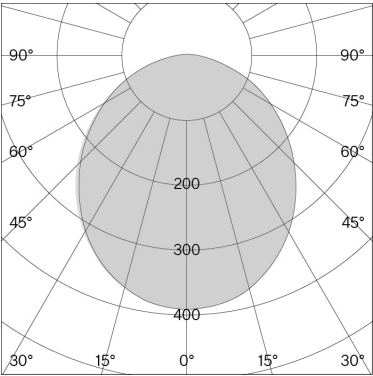


Technical information

|                                       |                                                                                                             |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Physical                              |                                                                                                             |
| Material                              | Lamp body: aluminium<br>Table base/clamp: aluminium & steel<br>Pin/bracket: aluminium<br>Floor stand: steel |
| Optics                                | Reflector: ABS<br>Diffuser: polycarbonate                                                                   |
| IP rating                             | 20                                                                                                          |
| Protection class                      | III                                                                                                         |
| LED                                   |                                                                                                             |
| Light source                          | COB LED (included)                                                                                          |
| Life time expectancy                  | L80 / 50,000 h                                                                                              |
| CRI Colour Rendering Index            | 95                                                                                                          |
| Standard deviation of colour matching | 3-step MacAdam                                                                                              |
| Replaceable by a professional         |                                                                                                             |

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w242 Pastille alu


w242 Pastille alu

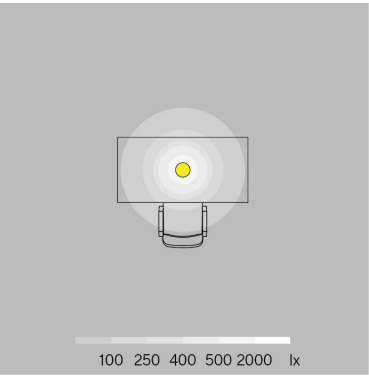

Article-specific information


|                                              |  |
|----------------------------------------------|--|
| Version                                      |  |
| Mounting                                     |  |
| LED Colour temperature (CCT) / Luminous flux |  |
| Voltage / System power                       |  |
| Efficacy                                     |  |
| Light control                                |  |
| Net weight                                   |  |
| Packaging dimensions                         |  |
| Gross weight                                 |  |
| Colour                                       |  |
| Traffic white (RAL 9016)                     |  |
| Jet black (RAL 9005)                         |  |
| Olive green (RAL 6003)                       |  |
| Oxide red (RAL 3009)                         |  |
| Raw tumbled                                  |  |
| Telegray 4 (RAL 7047)                        |  |
| Accessories                                  |  |
| Adapter suitable for Vitra Joyn 2 / Tyde 2   |  |
| Adapter suitable for USM Haller table        |  |
| Adapter suitable for USM Haller shelf        |  |

w242 Pastille alu b2

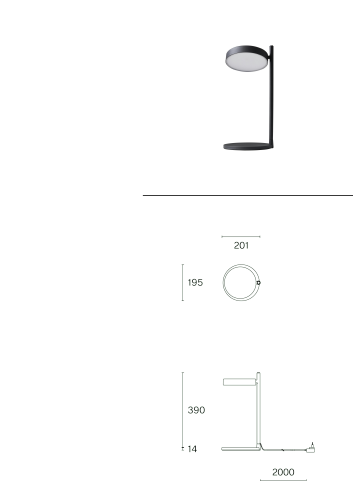


|                     |                                    |
|---------------------|------------------------------------|
| b2                  |                                    |
| Base                | 2700 K / 547 lm                    |
|                     | 100–240 V / 7.4 W                  |
|                     | 63 lm / W                          |
|                     | Dimmable                           |
|                     | 1.7 kg                             |
|                     | L51.0 × W23.2 × H7.8 cm (0.009 m³) |
|                     | 2.3 kg                             |
| Art. No. / EAN code |                                    |
| 242B20227           | / 7330492011684                    |
| 242B20527           | / 7330492011745                    |
| 242B20127           | / 7330492011660                    |
| 242B20327           | / 7330492011707                    |
| 242B22027           | / 7330492011769                    |
| 242B20427           | / 7330492011721                    |
| Art. No. / EAN code |                                    |
|                     |                                    |
|                     |                                    |
|                     |                                    |
|                     |                                    |

w242 Pastille alu c1

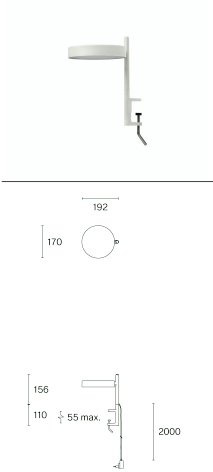

w242 Pastille alu c2

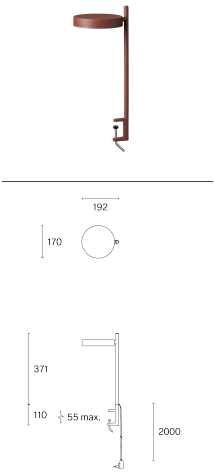

Article-specific information

|                                              |
|----------------------------------------------|
| Version                                      |
| Mounting                                     |
| LED Colour temperature (CCT) / Luminous flux |
| Voltage / System power                       |
| Efficacy                                     |
| Light control                                |
| Net weight                                   |
| Packaging dimensions                         |
| Gross weight                                 |

|                                    |
|------------------------------------|
| c1                                 |
| Clamp                              |
| 2700 K / 547 lm                    |
| 100–240 V / 7.4 W                  |
| 63 lm / W                          |
| Dimmable                           |
| 0.6 kg                             |
| L36.0 × W22.3 × H5.2 cm (0.004 m³) |
| 0.9 kg                             |


|                                    |
|------------------------------------|
| c2                                 |
| Clamp                              |
| 2700 K / 547 lm                    |
| 100–240 V / 7.4 W                  |
| 63 lm / W                          |
| Dimmable                           |
| 0.7 kg                             |
| L51.0 × W23.2 × H7.8 cm (0.009 m³) |
| 1.3 kg                             |

|                                            |
|--------------------------------------------|
| Colour                                     |
| Traffic white (RAL 9016)                   |
| Jet black (RAL 9005)                       |
| Olive green (RAL 6003)                     |
| Oxide red (RAL 3009)                       |
| Raw tumbled                                |
| Telegray 4 (RAL 7047)                      |
| Accessories                                |
| Adapter suitable for Vitra Joyn 2 / Tyde 2 |
| Adapter suitable for USM Haller table      |
| Adapter suitable for USM Haller shelf      |


|                            |
|----------------------------|
| Art. No. / EAN code        |
| 242CL10227 / 7330492012162 |
| 242CL10527 / 7330492012223 |
| 242CL10127 / 7330492012148 |
| 242CL10327 / 7330492012186 |
| 242CL12027 / 7330492012247 |
| 242CL10427 / 7330492012209 |
| Art. No. / EAN code        |
|                            |
|                            |
|                            |

|                            |
|----------------------------|
| Art. No. / EAN code        |
| 242CL20227 / 7330492012285 |
| 242CL20527 / 7330492012346 |
| 242CL20127 / 7330492012261 |
| 242CL20327 / 7330492012308 |
| 242CL22027 / 7330492012360 |
| 242CL20427 / 7330492012322 |
| Art. No. / EAN code        |
|                            |
|                            |
|                            |

w242 Pastille alu p2

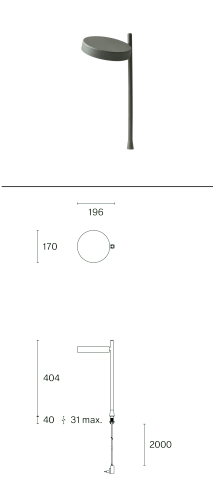

w242 Pastille alu f2

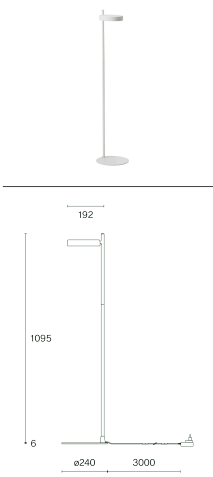

Article-specific information

|                                              |
|----------------------------------------------|
| Version                                      |
| Mounting                                     |
| LED Colour temperature (CCT) / Luminous flux |
| Voltage / System power                       |
| Efficacy                                     |
| Light control                                |
| Net weight                                   |
| Packaging dimensions                         |
| Gross weight                                 |

|                                    |
|------------------------------------|
| p2                                 |
| Pin – Integrated (hole ø 20 mm)    |
| 2700 K / 547 lm                    |
| 100–240 V / 7.4 W                  |
| 63 lm / W                          |
| Dimmable                           |
| 0.7 kg                             |
| L51.0 × W23.2 × H7.8 cm (0.009 m³) |
| 1.3 kg                             |


|                                    |
|------------------------------------|
| f2                                 |
| Floor base                         |
| 2700 K / 547 lm                    |
| 100–240 V / 7.4 W                  |
| 63 lm / W                          |
| Dimmable                           |
| 3.6 kg                             |
| L119.6 × W28.8 × H6.8 cm (0.02 m³) |
| 5.5 kg                             |

|                                            |
|--------------------------------------------|
| Colour                                     |
| Traffic white (RAL 9016)                   |
| Jet black (RAL 9005)                       |
| Olive green (RAL 6003)                     |
| Oxide red (RAL 3009)                       |
| Raw tumbled                                |
| Telegray 4 (RAL 7047)                      |
| Accessories                                |
| Adapter suitable for Vitra Joyn 2 / Tyde 2 |
| Adapter suitable for USM Haller table      |
| Adapter suitable for USM Haller shelf      |


|                              |
|------------------------------|
| Art. No. / EAN code          |
| 242P20227 / 7330492012568    |
| 242P20527 / 7330492012629    |
| 242P20127 / 7330492012544    |
| 242P20327 / 7330492012582    |
| 242P22027 / 7330492012643    |
| 242P20427 / 7330492012605    |
| Art. No. / EAN code          |
| 242-ADAPT001 / 7330492011639 |
| 242-ADAPT002 / 7330492011646 |
| 242-ADAPT003 / 7330492011653 |

|                           |
|---------------------------|
| Art. No. / EAN code       |
| 242F20227 / 7330492012469 |
| 242F20527 / 7330492012520 |
| 242F20127 / 7330492012445 |
| 242F20327 / 7330492012483 |
| 242F20427 / 7330492012506 |
| Art. No. / EAN code       |
|                           |
|                           |
|                           |

w242 Pastille alu br1

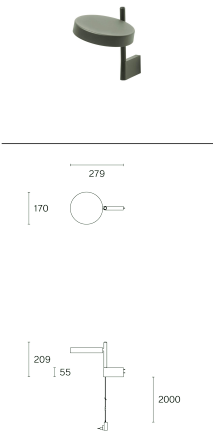

w242 Pastille alu br2

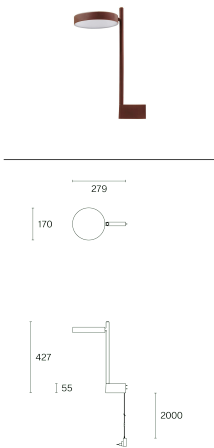

Article-specific information

|                                              |
|----------------------------------------------|
| Version                                      |
| Mounting                                     |
| LED Colour temperature (CCT) / Luminous flux |
| Voltage / System power                       |
| Efficacy                                     |
| Light control                                |
| Net weight                                   |
| Packaging dimensions                         |
| Gross weight                                 |

|                                    |
|------------------------------------|
| br1                                |
| Wall bracket                       |
| 2700 K / 547 lm                    |
| 100–240 V / 7.4 W                  |
| 63 lm / W                          |
| Dimmable                           |
| 0.6 kg                             |
| L36.0 × W22.3 × H5.2 cm (0.004 m³) |
| 0.9 kg                             |

|                                    |
|------------------------------------|
| br2                                |
| Wall bracket                       |
| 2700 K / 547 lm                    |
| 100–240 V / 7.4 W                  |
| 63 lm / W                          |
| Dimmable                           |
| 0.6 kg                             |
| L51.0 × W23.2 × H7.8 cm (0.009 m³) |
| 1.3 kg                             |

|                                            |
|--------------------------------------------|
| Colour                                     |
| Traffic white (RAL 9016)                   |
| Jet black (RAL 9005)                       |
| Olive green (RAL 6003)                     |
| Oxide red (RAL 3009)                       |
| Raw tumbled                                |
| Telegray 4 (RAL 7047)                      |
| Accessories                                |
| Adapter suitable for Vitra Joyn 2 / Tyde 2 |
| Adapter suitable for USM Haller table      |
| Adapter suitable for USM Haller shelf      |

|                            |
|----------------------------|
| Art. No. / EAN code        |
| 242BR10227 / 7330492011868 |
| 242BR10527 / 7330492011929 |
| 242BR10127 / 7330492011844 |
| 242BR10327 / 7330492011882 |
| 242BR12027 / 7330492011943 |
| 242BR10427 / 7330492011905 |
| Art. No. / EAN code        |
|                            |
|                            |
|                            |

|                            |
|----------------------------|
| Art. No. / EAN code        |
| 242BR20227 / 7330492011981 |
| 242BR20527 / 7330492012049 |
| 242BR20127 / 7330492011967 |
| 242BR20327 / 7330492012001 |
| 242BR22027 / 7330492012063 |
| 242BR20427 / 7330492012025 |
| Art. No. / EAN code        |
|                            |
|                            |
|                            |