


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## Placebo Suspended Down 60 1x LED 3000K DALI/Push-Dim DI White Structure




Placebo is a paradigm of playful choices of up and down light. You will soon discover the many options it comes with, giving you even more choices. Different shapes, sizes and shades designed for you, and then add all the colour combinations. All playful instruments to turn your creative vision into lovely rhythms of pure forms and light.




### Specifications

|                                 |                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                        | 12621509                                                                                                                                                                                                                    |
| Light Source Type               | LED                                                                                                                                                                                                                         |
| LED Type                        | PLACEBO - TCI LED 12x 3030                                                                                                                                                                                                  |
| LED technology                  | LED PCB                                                                                                                                                                                                                     |
| CRI                             | Min. 90                                                                                                                                                                                                                     |
| Colour Temperature              | 3000K                                                                                                                                                                                                                       |
| Lifetime                        | L80B20 @50,000 Hours                                                                                                                                                                                                        |
| Lamp Included                   | Yes                                                                                                                                                                                                                         |
| Number of Light Sources         | 1                                                                                                                                                                                                                           |
| CIE flux code                   | 24 48 74 53 72                                                                                                                                                                                                              |
| Binning (SDCM)                  | 3                                                                                                                                                                                                                           |
| Light Direction                 | Down                                                                                                                                                                                                                        |
| Input Voltage                   | 230V                                                                                                                                                                                                                        |
| Luminaire power (W)             | 9.0                                                                                                                                                                                                                         |
| Electrical Class                | I                                                                                                                                                                                                                           |
| IP Rating                       | 20                                                                                                                                                                                                                          |
| Glow wire rating (°C)           | 960                                                                                                                                                                                                                         |
| Dimming Protocol                | DALI, Push-Dim                                                                                                                                                                                                              |
| DALI Standard                   | DALI-2                                                                                                                                                                                                                      |
| Indoor/Outdoor                  | Indoor                                                                                                                                                                                                                      |
| Application                     | Ceiling                                                                                                                                                                                                                     |
| Mounting                        | Suspended                                                                                                                                                                                                                   |
| Adjustability                   | Not Applicable                                                                                                                                                                                                              |
| Distance to Lighted Object (m)  | 0,1                                                                                                                                                                                                                         |
| Primary Colour & Primary Finish | White, Structure                                                                                                                                                                                                            |
| Gross weight (g)                | 790.0                                                                                                                                                                                                                       |
| Luminous flux per lamp (lm)     | 625                                                                                                                                                                                                                         |
| Efficacy (lm/W)                 | 69                                                                                                                                                                                                                          |
| Glare rating                    | 18                                                                                                                                                                                                                          |
| Remark                          | <ul style="list-style-type: none"> <li>• Glass ball or tube not included</li> <li>• Longer suspension cable on request (standard length is 2 meter)</li> <li>• Lumen output depends on choice of glass accessory</li> </ul> |

TM30 &amp; CRI diagram

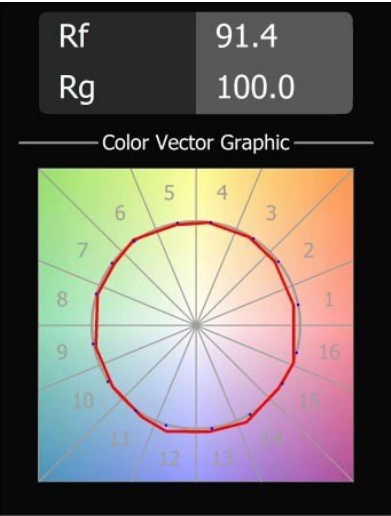


Light distribution &amp; beam diagram

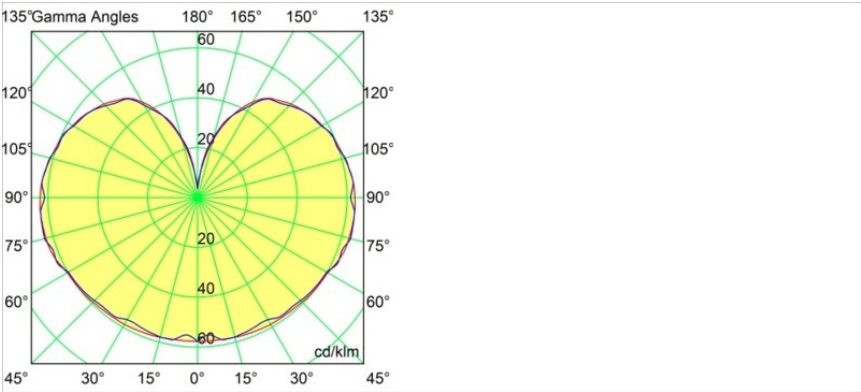


Diagrams


## Optical Accessories




**12624038** Glass Tube Down 46 Placebo White Matt



**12624238** Glass Tube Down 130 Placebo White Matt




**12626038** Glass Ball Down 90 Placebo White Matt




**12626238** Glass Ball Down 155 Placebo White Matt


## Decorative Accessories



- 12627017** Shade Sombrero Placebo Champagne Brushed
- 12627018** Shade Sombrero Placebo Bronze Brushed
- 12627038** Shade Sombrero Placebo Grey White Matt
- 12627083** Shade Sombrero Placebo Black Matt



- 12628017** Shade Beanie Placebo Champagne Brushed
- 12628018** Shade Beanie Placebo Bronze Brushed
- 12628038** Shade Beanie Placebo Grey White Matt
- 12628083** Shade Beanie Placebo Black Matt



- 12629017** Shade Douli Placebo Champagne Brushed
- 12629018** Shade Douli Placebo Bronze Brushed
- 12629038** Shade Douli Placebo Grey White Matt
- 12629083** Shade Douli Placebo Black Matt

Choose a required accessory