



|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## Medard Surface Adjustable 70 1x LED 3000K Medium Trailing Edge DI White Structure

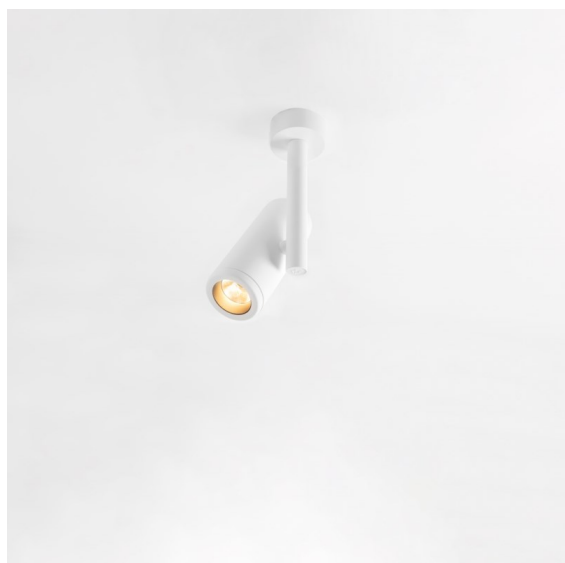


The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.



### Specifications

|                                 |                      |
|---------------------------------|----------------------|
| Material                        | 12734109             |
| Light Source Type               | LED                  |
| LED Type                        | BRIDGELUX VERO13     |
| LED technology                  | LED COB              |
| CRI                             | Min. 90              |
| Colour Temperature              | 3000K                |
| Lifetime                        | L80B20 @50,000 Hours |
| Lamp Included                   | Yes                  |
| Number of Light Sources         | 1                    |
| CIE flux code                   | 100 100 100 100 88   |
| Binning (SDCM)                  | 3                    |
| Light Direction                 | Down                 |
| Optic                           | Reflector            |
| Measured beam angle (°)         | 25.0                 |
| Input Voltage                   | 230V                 |
| Luminaire power (W)             | 13.0                 |
| Electrical Class                | I                    |
| IP Rating                       | 20                   |
| Glow wire rating (°C)           | 960                  |
| Dimming Protocol                | Trailing Edge        |
| Indoor/Outdoor                  | Indoor               |
| Application                     | Ceiling, Wall        |
| Mounting                        | Surface              |
| Adjustability                   | H 360° V 360°        |
| Distance to Lighted Object (m)  | 0,1                  |
| Primary Colour & Primary Finish | White, Structure     |
| Gross weight (g)                | 960.0                |
| Luminous flux per lamp (lm)     | 920                  |
| Efficacy (lm/W)                 | 71                   |
| Glare rating                    | 16                   |
| Remark                          | • 4000K on request   |

TM30 & CRI diagram

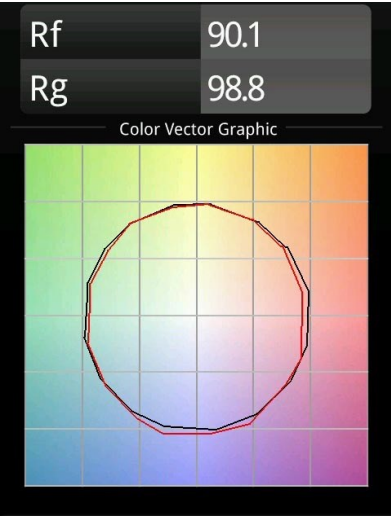

Light distribution & beam diagram

