


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

### *Pista Linear Light Track 48V 1136 1x LED 2700K 1-10V White Structure*




Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.




#### **Specifications**

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                        | 13413109                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Light Source Type               | LED                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| LED Type                        | PISTA LINEAR (FLAPS)                                                                                                                                                                                                                                                                                                                                                                                                                               |
| LED technology                  | LED flexible PCB                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| CRI                             | Min. 90                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Colour Temperature              | 2700K                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Lifetime                        | L80B10 @50,000 Hours                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Lamp Included                   | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Number of Light Sources         | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| CIE flux code                   | 52 82 97 100 61                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Binning (SDCM)                  | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Light Direction                 | Down                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Input Voltage                   | 48Vdc                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Luminaire power (W)             | 17.0                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electrical Class                | III                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| IP Rating                       | 20                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Glow wire rating (°C)           | 960                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimming Protocol                | 1-10V                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Indoor/Outdoor                  | Indoor                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Application                     | Ceiling, Wall                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Adjustability                   | Not Applicable                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Distance to Lighted Object (m)  | 0,1                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Primary Colour & Primary Finish | White, Structure                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Gross weight (g)                | 737.0                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Delivered lumens (lm)           | 985                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Efficacy (lm/W)                 | 57                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Glare rating                    | 26                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Remark                          | <ul style="list-style-type: none"> <li>• 3500K and 4000K on request</li> <li>• White Pista Track 48V linear modules come with a white track adapter. All other Pista Track 48V linear modules have a black track adapter. Exceptions are only possible on request.</li> <li>• This is not a complete product. Pista track 48V system required.</li> <li>• For installations without dimmer, it is recommended to use 1-10 V luminaires.</li> </ul> |

TM30 & CRI diagram

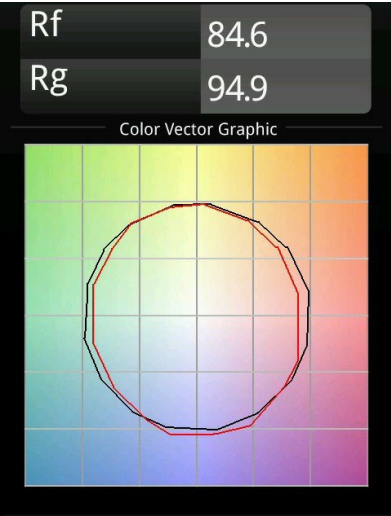

Light distribution & beam diagram

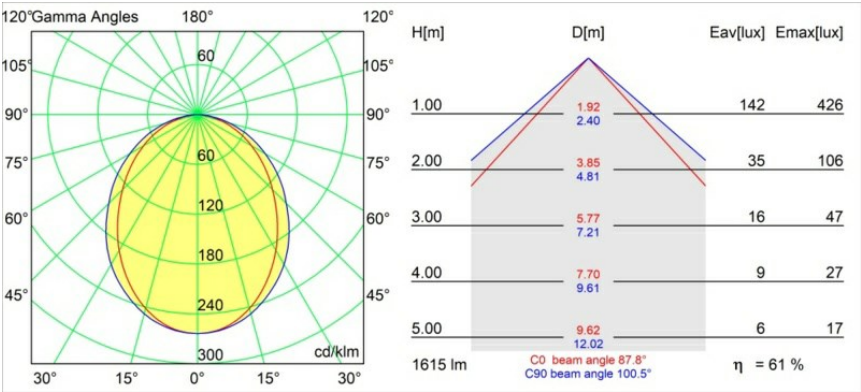

Diagrams