


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## Impulse Square Wall 1x LED 2700K DALI/Push-Dim DI Grey White Structure




An abstract square shape that transforms into a poem of light and shadow. Impulse Square Wall brings a surprising light effect to any surface it touches.



### Specifications

|                                 |                       |
|---------------------------------|-----------------------|
| Material                        | 13771036              |
| Light Source Type               | LED                   |
| LED Type                        | LED PCB IMPULSE       |
| LED technology                  | LED PCB               |
| CRI                             | Min. 90               |
| Colour Temperature              | 2700K                 |
| Lifetime                        | L80B10 @50,000 Hours  |
| Lamp Included                   | Yes                   |
| Number of Light Sources         | 1                     |
| CIE flux code                   | 0 8 38 5 88           |
| Binning (SDCM)                  | 3                     |
| Light Direction                 | Up, Down              |
| Measured beam angle (°)         | 120.0                 |
| Input Voltage                   | 230V                  |
| Luminaire power (W)             | 7.7                   |
| Electrical Class                | I                     |
| IP Rating                       | 20                    |
| Glow wire rating (°C)           | 960                   |
| Dimming Protocol                | DALI, Push-Dim        |
| DALI Standard                   | DALI-2                |
| Indoor/Outdoor                  | Indoor                |
| Application                     | Wall                  |
| Mounting                        | Surface               |
| Adjustability                   | Not Applicable        |
| Distance to Lighted Object (m)  | 0,1                   |
| Primary Colour & Primary Finish | Grey White, Structure |
| Gross weight (g)                | 911.0                 |
| Luminous flux per lamp (lm)     | 561                   |
| Efficacy (lm/W)                 | 73                    |
| Glare rating                    | 26                    |

### TM30 & CRI diagram

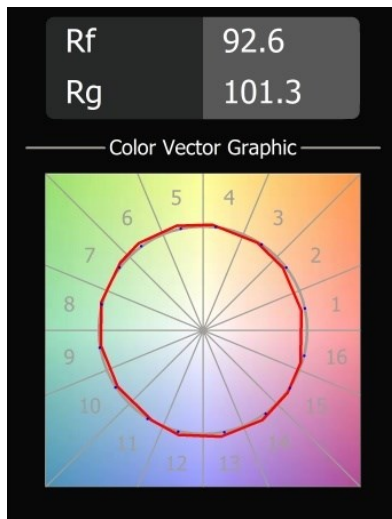

### Light distribution & beam diagram

