


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## Wink Recessed 82 1x IP54 LED 3000K Spot DE White Structure



Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.



### Specifications

|                                 |                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Material                        | 14200309                                                                                                                 |
| Light Source Type               | LED                                                                                                                      |
| LED Type                        | BRIDGELUX V8G8                                                                                                           |
| LED technology                  | LED COB                                                                                                                  |
| CRI                             | Min. 90                                                                                                                  |
| Colour Temperature              | 3000K                                                                                                                    |
| Lifetime                        | L90B10 @50,000 Hours                                                                                                     |
| Lamp Included                   | Yes                                                                                                                      |
| Number of Light Sources         | 1                                                                                                                        |
| CIE flux code                   | 90 96 99 100 90                                                                                                          |
| Binning (SDCM)                  | 2                                                                                                                        |
| Light Direction                 | Down                                                                                                                     |
| Optic                           | Reflector                                                                                                                |
| Measured beam angle (°)         | 15.9                                                                                                                     |
| Input Voltage                   | Constant Current Driver Required                                                                                         |
| Electrical Class                | III                                                                                                                      |
| IP Rating                       | 54                                                                                                                       |
| Glow wire rating (°C)           | 960                                                                                                                      |
| Indoor/Outdoor                  | Indoor                                                                                                                   |
| Application                     | Ceiling                                                                                                                  |
| Mounting                        | Recessed                                                                                                                 |
| Cut-out size (mm)               | ø98                                                                                                                      |
| Mounting depth (mm)             | 100.0                                                                                                                    |
| Adjustability                   | H 355°                                                                                                                   |
| Distance to Lighted Object (m)  | 0,1                                                                                                                      |
| Primary Colour & Primary Finish | White, Structure                                                                                                         |
| Gross weight (g)                | 255.0                                                                                                                    |
| Drive current (mA)              | 350      500                                                                                                             |
| Min. forward voltage (Vf)       | 13,2      13,7                                                                                                           |
| Max. forward voltage (Vf)       | 15,0      15,4                                                                                                           |
| Connected load (W)              | 5,0      7,2                                                                                                             |
| Delivered lumens (lm)           | 517      693                                                                                                             |
| Efficacy (lm/W)                 | 103      96                                                                                                              |
| Glare rating                    | 22      23                                                                                                               |
| Remark                          | <ul style="list-style-type: none"> <li>This is not a complete product. Recessed Ring or Wink Flange required.</li> </ul> |





**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Wink Recessed 82 1x IP54 LED 3000K Spot DE White Structure*

---


### TM30 & CRI diagram

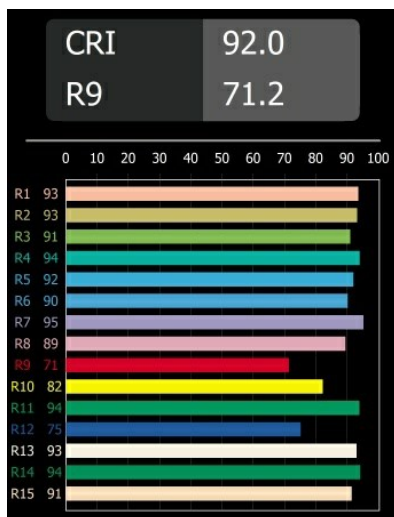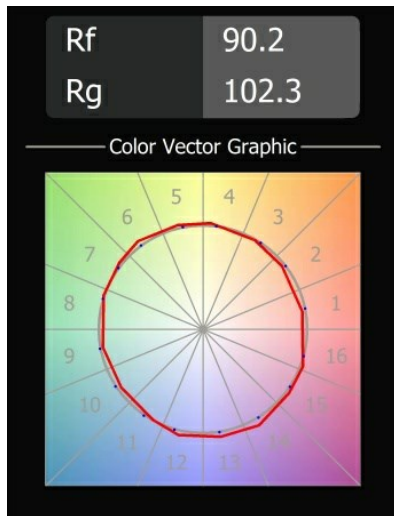


### Light distribution & beam diagram

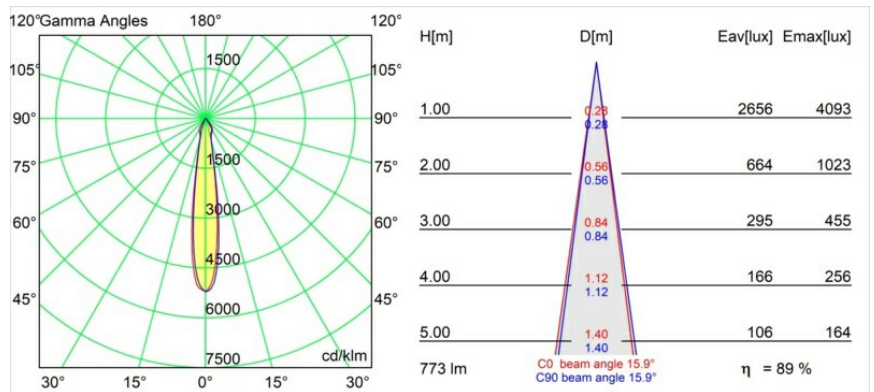

## Installation Accessories



- **14203009** Ring Recessed 82 Wink White Structure
- **14203032** Ring Recessed 82 Wink 1x Black Structure



- **14203030** Ring Recessed Trimless 110 1x

■ Choose a required accessory