


Date
Customer
Project
Type

## Wink Recessed 82 1x IP54 LED 3000K Spot DE Black Structure



Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.

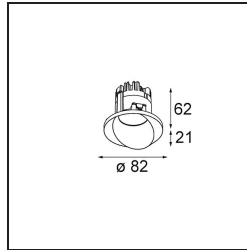

### Specifications

Material	14200332	
Light Source Type	LED	
LED Type	BRIDGELUX V8G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	98 100 100 100 75	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	15.8	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	54	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	ø98	
Mounting depth (mm)	100.0	
Adjustability	H 355°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Gross weight (g)	255.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13.2	13.7
Max. forward voltage (Vf)	15.0	15.4
Connected load (W)	5.0	7.2
Delivered lumens (lm)	434	582
Efficacy (lm/W)	87	81
Glare rating	18	19
Remark	<ul style="list-style-type: none"> <li>This is not a complete product. Recessed Ring or Wink Flange required.</li> </ul>	




**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Wink Recessed 82 1x IP54 LED 3000K Spot DE Black Structure*

---


### TM30 & CRI diagram

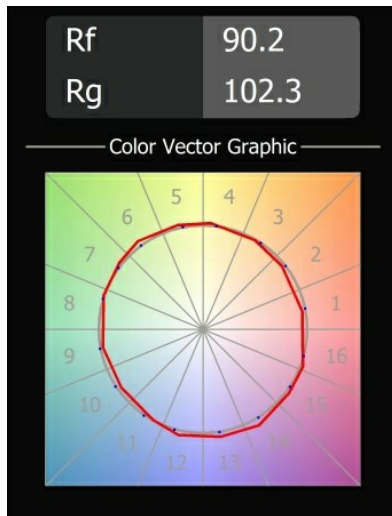


### Light distribution & beam diagram

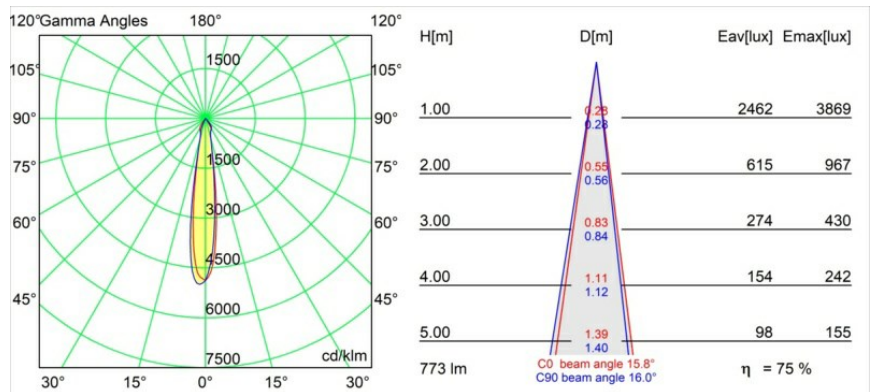

## Installation Accessories

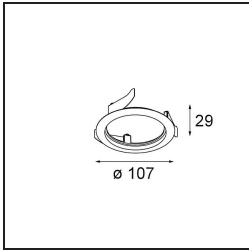

- **14203009** Ring Recessed 82 Wink White Structure
- **14203032** Ring Recessed 82 Wink 1x Black Structure

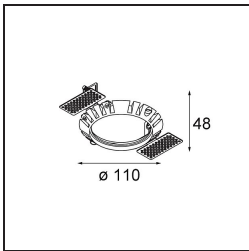

- **14203030** Ring Recessed Trimless 110 1x

■ Choose a required accessory