




**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**

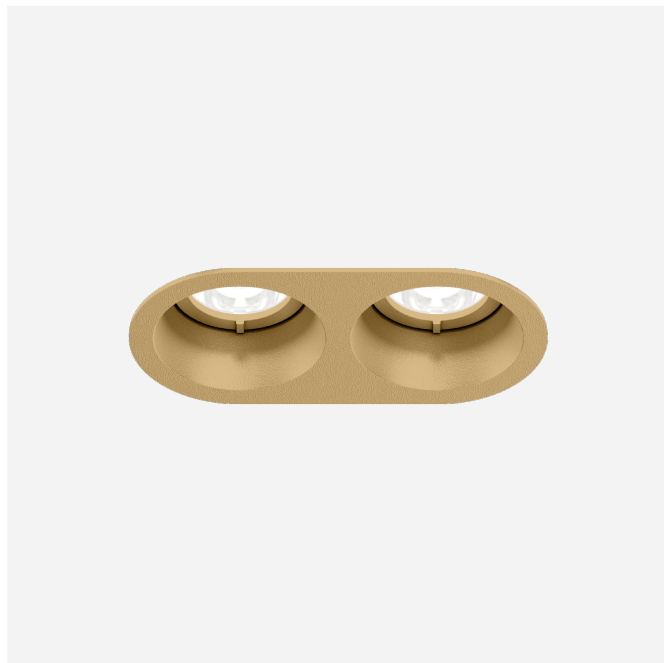

Oval ceiling recessed downlight made from die-cast aluminium; surface Champagne; powder coated; matt texture; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 60 mm; beam angle 31°; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; UGR  $\leq 13$ ; degree of protection IP20; Class 3; IC rated; driver not included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



**GENERAL**

Ceiling  
Recessed  
Champagne  
IP20  
IC rated  
Interior  
CIE flux code: 99 100 100 100 100

**LED**

2700 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM

**OPTICAL**

Standard  
beam angle 31°

**ELECTRICAL**

excl. driver  
34 V  
inset 8.3 W  
Class 3

**PHYSICAL**

length 107 mm  
width 57 mm  
height 51 mm  
0.15 kg  
wire springs


**CUTOUT**

min. ceiling thickness 4 mm  
max. ceiling thickness 25 mm  
recessed depth 60 mm  
Cut out: 50-52 x 100-104

**OUTPUT**

250mA  
920 lm  
11.1 W

**LIGHT DISTRIBUTION**





## CONE DIAGRAM

standard 30° 250mA

h (m)	E0° (lx)	ø (m)
1	2680	0.54
2	670	1.07
3	300	1.61
4	170	2.15
5	110	2.68

## Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF

MF Maintenance Factor

LMF<sup>a</sup> Luminaire Maintenance Factor

RSMF<sup>a</sup> Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## ELECTRICAL ACCESSORIES

### Driver

Type	Voltage	L·W·H (MM)	Item number
10.5W   250mA   26-42V   phase-cut dim	26-42V	122·41·23	90226501
13W   250mA   2.5-52V   DALI-2	2.5-52V	144·33·21	90246501
10W   250mA   6-40V   DALI	6-40V	124·31·21	90249402