




PROJECT

TYPE

NOTES

QUANTITY

DATE

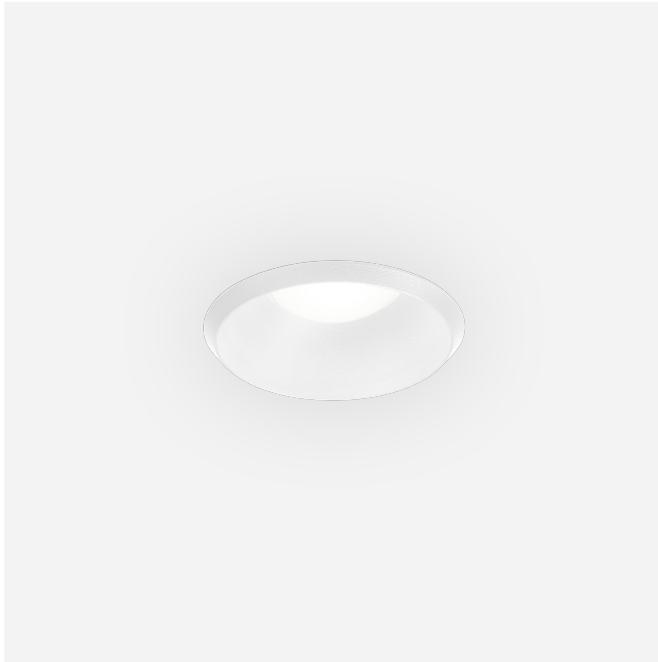

Round ceiling recessed downlight made from die-cast aluminium with opal glass lens; surface White Matt; powder coated; matt texture; RAL 9010; installation without tools using wire springs; suitable for ceiling thickness of 4-27 mm; recessed depth 80 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; degree of protection IP65; Class 3; IC rated; driver not included; light source not replaceable;



LUMINAIRE

Ceiling
Recessed
White Matt
RAL 9010 ^a
IP65
IC rated
Exterior
515 lm / 500mA
375 lm / 350mA

LED Module

2700 K
CRI ≥ 90
L80 / 55000h
 ≤ 2 SDCM (initial MacAdam)
377 lm / 350mA
63 lm/W ^b
6 W ^b

Optical

Extreme wide
beam angle 105°
CIE flux code: 55 87 98 100
100

Electrical

excl. driver
17 V
Class III

Physical


diameter 77 mm
height 55 mm
0.13 kg
wire springs

Cutout

diameter 70 mm
min. ceiling thickness 4 mm
max. ceiling thickness 27 mm
recessed depth 80 mm

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

LIGHT DISTRIBUTION

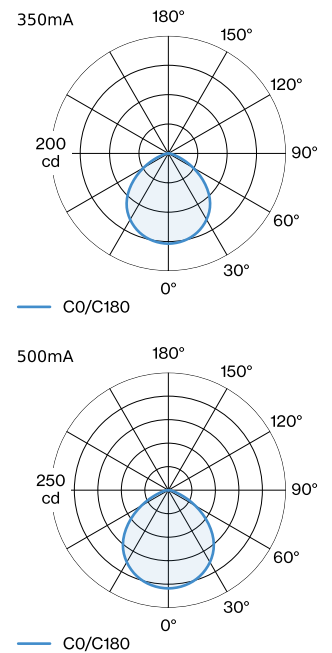



CONE DIAGRAM

extreme wide 103° 350mA

h (m)	E0° (lx)	ø (m)
1	154	2.52
2	38	5.04
3	17	7.57
4	10	10.09
5	6	12.61

Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF

MF Maintenance Factor

LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
10W 500mA 11-20V		11-20V	100-43-23	90214405
10W 500mA 13-20V		13-20V	65-39-20	90214406
24W 500mA 5-49V IP68		5-49V	122-54-26	90214702
10W 500mA 3-20V phase-cut dim		3-20V	102-49-29	90224402
10W 500mA 12-21V phase-cut dim		12-21V	115-41-25	90224403