



**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**



Round shape ceiling surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; aluminium shade; surface Black Matt wet painted; matt texture; n.a.; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; CRI (Colour Rendering Index)  $\geq 90$ ; degree of protection IP20; Class 1; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500$  cd/m<sup>2</sup>; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

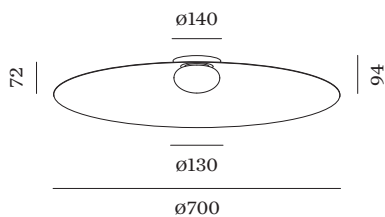

**GENERAL**

Ceiling  
Surface  
Black Matt  
n.a.<sup>a</sup>  
IP20  
Interior  
380 lm  
CIE flux code: 37 67 90 100 100

**LED**

2700 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM

**OPTICAL**

Opal

**ELECTRICAL**


phase-cut dim  
220 - 240 V  
system 14.1 W  
Class 1

**PHYSICAL**

diameter 700 mm  
height 94 mm  
2.09 kg

<sup>a</sup> Colour may deviate slightly due to production conditions.

**LIGHT DISTRIBUTION**



[181384B3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of  $\pm 10\%$ , those for the electrical connected load are initially subject to a tolerance of  $\pm 10\%$ , and those for the colour temperature are initially subject to a tolerance of  $\pm 150$  K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.


**Maintenance Factor**

| Operating Time [h] | 10.000 | 20.000 | 30.000 | 40.000 | 50.000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.96   | 0.92   | 0.88   | 0.85   | 0.81   |
| LSF                | 1      | 1      | 1      | 1      | 1      |

|                  |                                          |                   |                                 |
|------------------|------------------------------------------|-------------------|---------------------------------|
| MF               | $LMF \times RSMF \times LLMF \times LSF$ | RSMF <sup>a</sup> | Room Surface Maintenance Factor |
| MF               | Maintenance Factor                       | LLMF              | Lamp Lumens Maintenance Factor  |
| LMF <sup>a</sup> | Luminaire Maintenance Factor             | LSF               | Lamp Survival Factor            |

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.