




**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; 2000; non dim; light colour 4000 K; CRI  $\geq 80$ ; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

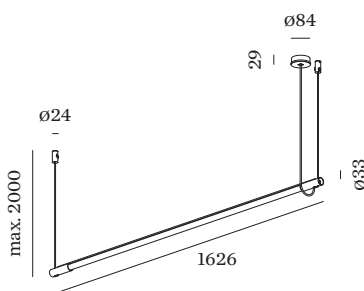

**GENERAL**

Ceiling  
Suspended  
Black Matt  
RAL 9005 <sup>a</sup>  
IP20  
Interior  
indirect 1140 lm  
direct 2810 lm  
total 3950 lm  
CIE flux code: 36 64 84 71 100

**LED**

4000 K  
CRI  $\geq 80$   
L70 / 60000h  
initial MacAdam  $\leq 3$  SDCM

**OPTICAL**

Opal

**ELECTRICAL**

non dim  
220 - 240 V  
system 22.1 W  
Class 2

**PHYSICAL**

length 1624 mm  
width 33 mm  
height 33 mm  
0.42 kg  
cable length 2000 mm

<sup>a</sup> Colour may deviate slightly due to production conditions.

**LIGHT DISTRIBUTION**

