



**PROJECT**

---

**TYPE**

---

**NOTES**

---

**QUANTITY**


---

**DATE**

---



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; inclusive black adjustable cable suspension max. 2000 mm; non dim; light colour 3000 K; CRI ≥ 80; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

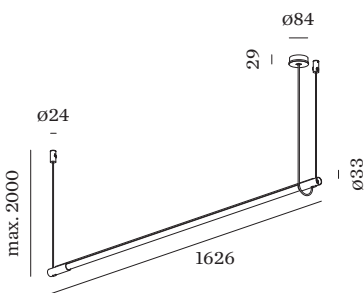

**LUMINAIRE**

Ceiling  
Suspended  
Black Matt  
RAL 9011 <sup>a</sup>  
IP20  
Interior  
3560 lm

**LED Module**

3000 K  
CRI ≥ 80  
L70 / 60000h  
≤ 3 SDCM (initial MacAdam)

**Optical**

Opal  
CIE flux code: 36 64 84 71 100

**Electrical**

non dim  
220 - 240 V  
system 22.1 W  
Class II  
Standard

**Physical**

length 33 mm  
width 1626 mm  
height 33 mm  
0.42 kg  
cable length 2000 mm

**datasheet.quicksum.material**

Polycarbonate

<sup>a</sup> Colour may deviate slightly due to production conditions

**LIGHT DISTRIBUTION**

