



PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; inclusive black adjustable cable suspension max. 2000 mm; phase-cut dim; light colour 2700 K; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

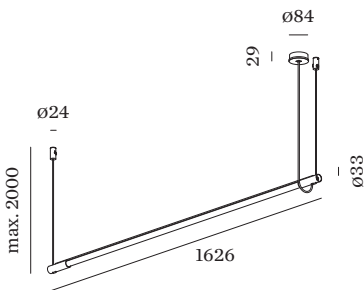

LUMINAIRE

Ceiling _____
 Suspended _____
 Black Matt _____
 RAL 9011 ^a _____
 IP20 _____
 Interior _____
 2780 lm _____

LED Module

2700 K _____
 CRI ≥ 90 _____
 L70 / 50000h _____
 ≤ 3 SDCM (initial MacAdam) _____

Optical

Opal _____
 CIE flux code: 40 70 89 90 100 _____

Electrical

phase-cut dim _____
 220 - 240 V _____
 system 21.8 W _____
 Class II _____
 Standard _____

Physical

length 33 mm _____
 width 1626 mm _____
 height 33 mm _____
 0.42 kg _____
 cable length 2000 mm _____

datasheet.quicksum.material

Polycarbonate _____

^a Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION

