



PROJECT

TYPE


NOTES

QUANTITY

DATE



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; inclusive black adjustable cable suspension max. 2000 mm; phase-cut dim; light colour 3000 K; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

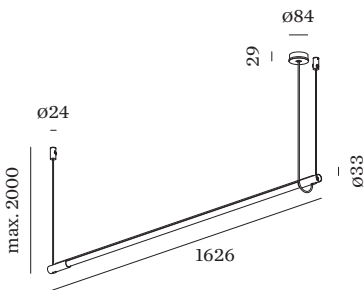

LUMINAIRE

Ceiling
Suspended
Black Matt
RAL 9011 ^a
IP20
Interior
2940 lm

LED Module

3000 K
CRI ≥ 90
L70 / 50000h
≤ 3 SDCM (initial MacAdam)

Optical

Opal
CIE flux code: 40 70 89 90 100

Electrical

phase-cut dim
220 - 240 V
system 23.0 W
Class II
Standard

Physical

length 33 mm
width 1626 mm
height 33 mm
0.42 kg
cable length 2000 mm

datasheet.quicksum.material

Polycarbonate

^a Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION

