




**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**

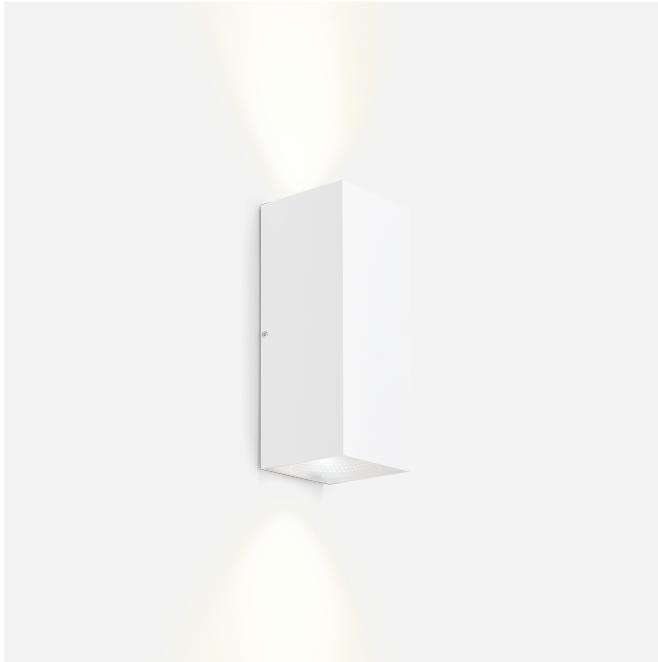

Squared wall surface mounted luminaire made from aluminium; surface White Matt; powder coated; matt texture; RAL 9010; up and down light emission; beam angle 36°; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; 220 - 240 V; driver included; degree of protection IP20; Class 1; light source not replaceable;



**GENERAL**

Wall  
Surface  
White Matt  
RAL 9010 <sup>a</sup>  
IP20  
Interior  
indirect 375 lm  
direct 375 lm  
total 750 lm  
CIE flux code: 95 99 100 50 100

**LED**

3000 K  
CRI  $\geq 90$   
L70 / 55000h  
initial MacAdam  $\leq 3$  SDCM

**OPTICAL**

Standard  
beam angle 36°


**ELECTRICAL**

phase-cut dim  
220 - 240 V  
system 8.6 W  
Class 1

**PHYSICAL**

length 50 mm  
width 50 mm  
height 120 mm  
0.35 kg

**LIGHT DISTRIBUTION**



<sup>a</sup> Colour may deviate slightly due to production conditions.