WEVER & DUCRÉ LIGHTING

DOT 2.0

330164M5

PROJECT

TYPE

NOTES

QUANTITY

DATE

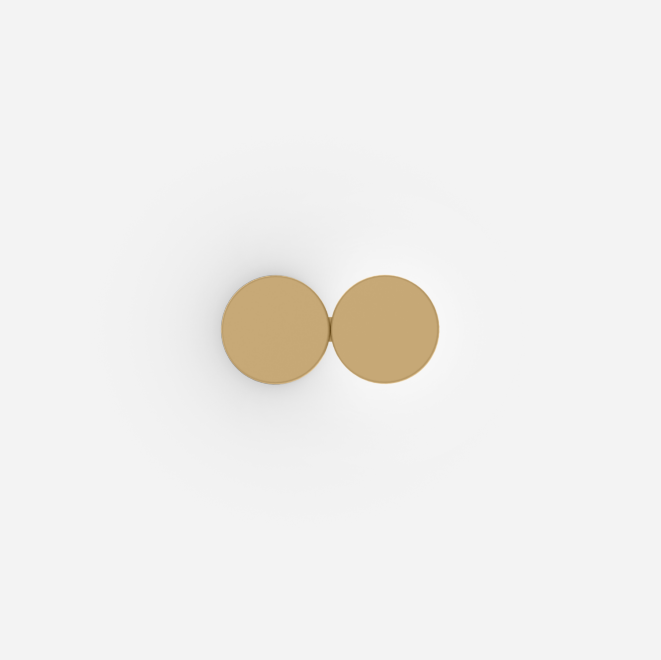

GENERAL

Wall
Surface
Champagne
IP20
Interior
435 lm
CIE flux code: 3 27 62 44 100

LED

3000 K
CRI ≥ 90
L80 / 55000h
initial MacAdam ≤ 2 SDCM

ELECTRICAL

phase-cut dim
220 - 240 V
system 8.2 W
Class 1

PHYSICAL

length 150 mm
width 65 mm
height 75 mm
0.4 kg

LIGHT DISTRIBUTION



CRI ≥90

Wall surface luminaire made from aluminium; surface Champagne; wet painted, smooth semi glossy; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



['330164M5'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com