




PROJECT

TYPE

NOTES

QUANTITY

DATE

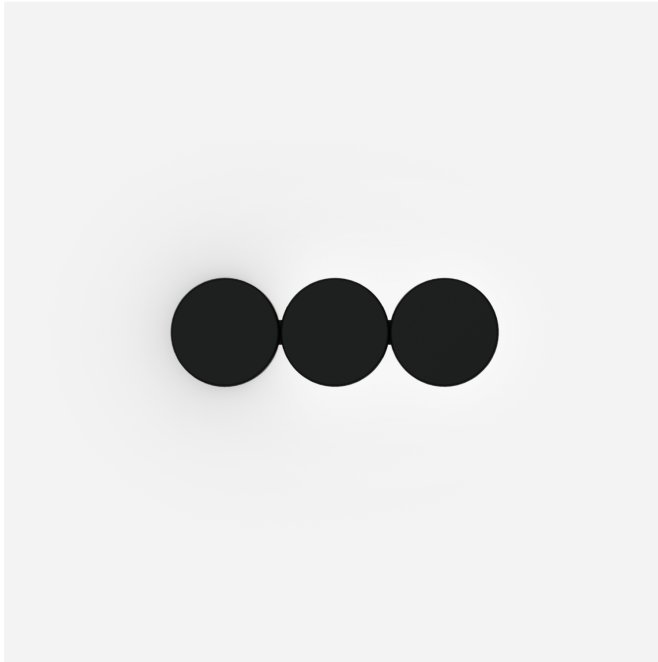

Wall surface luminaire made from aluminium; surface Black Matt; powder coated, matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

GENERAL

Wall
Surface
Black Matt
RAL 9005 ^a
IP20
Interior
790 lm
CIE flux code: 8 33 65 46 100

LED

2700 K
CRI ≥ 90
L80 / 55000h
initial MacAdam ≤ 2 SDCM



ELECTRICAL

phase-cut dim
220 - 240 V
system 15.3 W
Class 1

PHYSICAL

length 226 mm
width 65 mm
height 75 mm
0.56 kg

LIGHT DISTRIBUTION



['330264B3'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.