




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

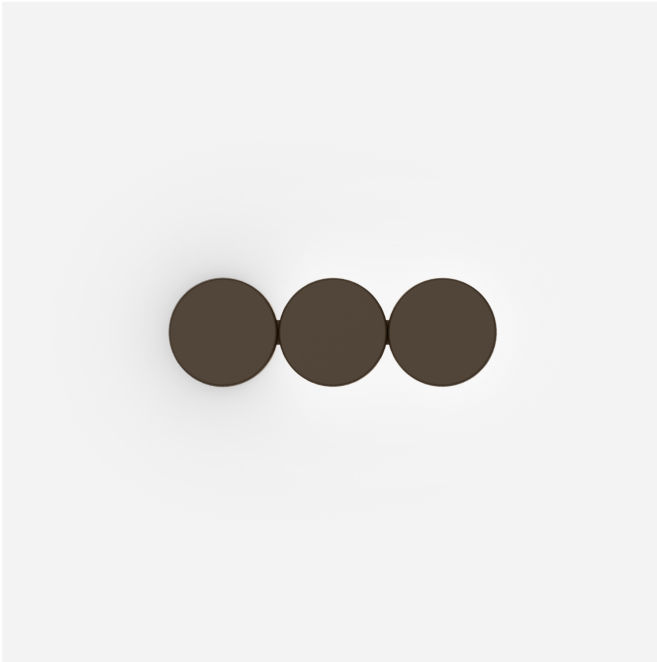

GENERAL

Wall _____

Surface _____

Bronze _____

IP20 _____

Interior _____

855 lm _____

CIE flux code: 8 33 65 47 100 _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 55000h _____

initial MacAdam ≤ 2 SDCM _____

ELECTRICAL

phase-cut dim _____

220 - 240 V _____

system 15.5 W _____

Class 1 _____

PHYSICAL


length 226 mm _____

width 65 mm _____

height 75 mm _____

0.56 kg _____

LIGHT DISTRIBUTION



Wall surface luminaire made from aluminium; surface Bronze; wet painted, matt smooth; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

