




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

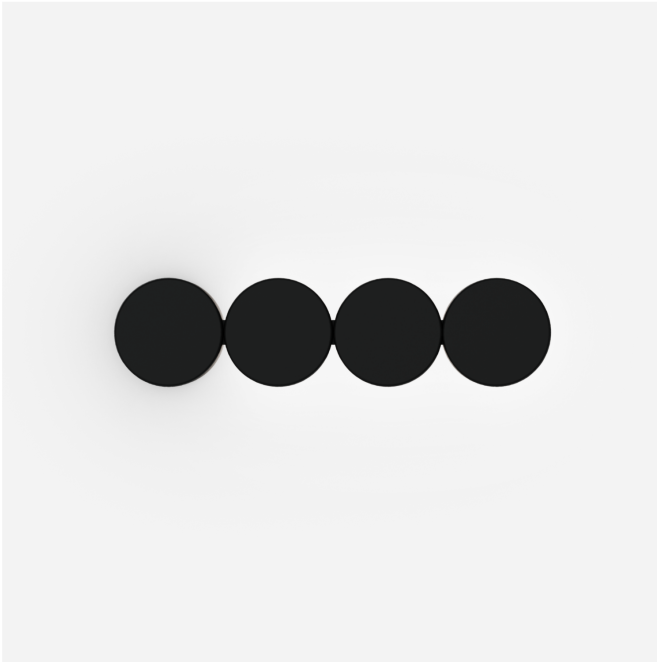

Wall surface luminaire made from aluminium; surface Black Matt; powder coated, matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

GENERAL

Wall _____
 Surface _____
 Black Matt _____
 RAL 9005 ^a _____
 IP20 _____
 Interior _____
 1210 lm _____
 CIE flux code: 10 35 66 47 100 _____

LED

2700 K _____
 CRI ≥ 90 _____
 L80 / 55000h _____
 initial MacAdam ≤ 2 SDCM _____



ELECTRICAL

phase-cut dim _____
 220 - 240 V _____
 system 21.1 W _____
 Class 1 _____

PHYSICAL

length 301 mm _____
 width 65 mm _____
 height 75 mm _____
 0.73 kg _____

LIGHT DISTRIBUTION



^a Colour may deviate slightly due to production conditions.